

GENERAL SUMMARY


Prepared for:
Project ID:
Scope: ELECTRICAL
No. Of Floors: 3
Date:

BUILDING GSF	52,399
1st Floor (SF)	15,819
2nd Floor (SF)	18,290
2nd Floor (SF)	18,290

DIVISION NO.	DESCRIPTION	TOTAL DIV. COST	TOTAL DIV. COST (PER SF)
1000	General Requirments	\$ 65,000	\$ 1.24
2000	Existing Condition	\$ 277	\$ 0.01
26000	Electrical	\$ 1,134,864	\$ 21.66
TOTAL TRADE COST		\$ 1,200,142	\$ 23

OVERHEAD AND PROFIT	10%	\$ 120,014	\$ 2.29
INSURANCE	2%	\$ 24,003	\$ 0
CONTINGENCY	3%	\$ 36,004	\$ 1
TAX	9%	\$ 61,397	\$ 2
TOTAL TRADE COST		\$ 1,441,560	\$ 28

DIVISION COST COMPARISON

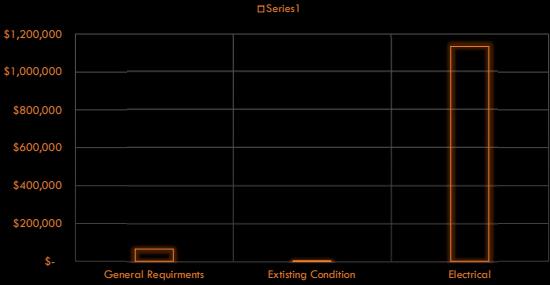

DETAILED BREAKDOWN OF ITEMS													
Prepared for: Project ID: Scope: ELECTRICAL										TOTAL TRADE COST		\$1,200,142	
										OH & PROFIT		\$120,014	
										INSURANCE		\$24,003	
										CONTINGENCY		\$36,004	
										TAX		\$61,397	
										SUGGESTED BID		\$1,441,560	
Date: 22/06/2022													
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MAN/HR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
GENERAL REQUIREMENTS													
1			Permits	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ -	\$ -
2			Supervision and Coordination	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 18,000.00	\$ 18,000.00
3			Submittals and Shop drawings	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 4,000.00	\$ 4,000.00
4			Final Cleaning	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 5,000.00	\$ 5,000.00
5			Mobilization Costs	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 30,000.00	\$ 30,000.00
6			Temporary Control & Facilities	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 8,000.00	\$ 8,000.00
7			Scaffolding	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ -	\$ -
SUBTOTAL												\$	65,000
EXISTING CONDITIONS													
8			DEMOLITION Existing Site Light To Be Removed	EA	4	0%	4	1.650	\$ 42.00	\$ 69.30	\$ -	\$ 69.30	\$ 277.20
SUBTOTAL												\$	277
ELECTRICAL													
DISTRIBUTION													
CONDUIT:													
9			4" EMT Conduit	LF	91	5%	96	0.200	\$ 42.00	\$ 8.40	\$ 10.77	\$ 19.17	\$ 1,831.69
10			4" LFMC Conduit	LF	48	5%	50	0.200	\$ 42.00	\$ 8.40	\$ 23.75	\$ 32.15	\$ 1,620.36
11			4" PVC SCH 80 Conduit	LF	302	5%	317	0.178	\$ 42.00	\$ 7.48	\$ 9.38	\$ 16.86	\$ 5,345.04
12			4" RGS Conduit	LF	48	5%	50	0.400	\$ 42.00	\$ 16.80	\$ 30.27	\$ 47.07	\$ 2,372.33
13			3 1/2" EMT Conduit	LF	448	5%	470	0.178	\$ 42.00	\$ 7.48	\$ 10.50	\$ 17.98	\$ 8,455.91
14			3 1/2" LFMC Conduit	LF	12	5%	13	0.178	\$ 42.00	\$ 7.48	\$ 18.35	\$ 25.83	\$ 325.41
15			3 1/2" PVC SCH 80 Conduit	LF	139	5%	146	0.160	\$ 42.00	\$ 6.72	\$ 9.07	\$ 15.79	\$ 2,304.38
16			3 1/2" PVC SCH 80 Conduit	LF	102	5%	107	0.160	\$ 42.00	\$ 6.72	\$ 9.07	\$ 15.79	\$ 1,690.11
17			3 1/2" RGS Conduit	LF	12	5%	13	0.364	\$ 42.00	\$ 15.29	\$ 28.59	\$ 43.88	\$ 552.86
18			3" EMT Conduit	LF	195	5%	205	0.160	\$ 42.00	\$ 6.72	\$ 7.97	\$ 14.69	\$ 3,004.69
19			3" FMC Conduit	LF	10	5%	11	0.160	\$ 42.00	\$ 6.72	\$ 5.76	\$ 12.48	\$ 133.01
20			2 1/2" EMT Conduit	LF	274	5%	287	0.133	\$ 42.00	\$ 5.60	\$ 6.29	\$ 11.89	\$ 3,414.61
21			2" EMT Conduit	LF	97	5%	102	0.100	\$ 42.00	\$ 4.20	\$ 3.96	\$ 8.16	\$ 831.10
22			1 1/2" EMT Conduit	LF	217	5%	228	0.090	\$ 42.00	\$ 3.78	\$ 3.38	\$ 7.16	\$ 1,631.63
23			1 1/2" PVC SCH 80 Conduit	LF	12	5%	12	0.080	\$ 42.00	\$ 3.36	\$ 2.45	\$ 5.81	\$ 71.68
24			1/2" FMC Conduit	LF	5	5%	5	0.047	\$ 42.00	\$ 1.97	\$ 0.65	\$ 2.62	\$ 13.78
25			1/2" EMT Conduit	LF	27	5%	28	0.047	\$ 42.00	\$ 1.97	\$ 0.54	\$ 2.51	\$ 71.27
CONDUCTOR:													
26			#600 CU THWN	LF	1956	5%	2054	0.040	\$ 42.00	\$ 1.68	\$ 15.65	\$ 17.33	\$ 35,596.72
27			#500 CU THWN	LF	882	5%	926	0.035	\$ 42.00	\$ 1.47	\$ 12.57	\$ 14.04	\$ 13,004.80
28			#400 CU THWN	LF	2002	5%	2102	0.032	\$ 42.00	\$ 1.34	\$ 9.95	\$ 11.29	\$ 23,741.12
29			#300 CU THWN	LF	779	5%	818	0.028	\$ 42.00	\$ 1.18	\$ 7.46	\$ 8.64	\$ 7,065.63
30			#4/0 CU THWN	LF	1094	5%	1149	0.018	\$ 42.00	\$ 0.76	\$ 5.37	\$ 6.13	\$ 7,037.97
31			#2/0 CU THWN	LF	237	5%	249	0.016	\$ 42.00	\$ 0.67	\$ 3.40	\$ 4.07	\$ 1,014.51
32			#1/0 CU THWN	LF	151	5%	158	0.015	\$ 42.00	\$ 0.63	\$ 2.77	\$ 3.40	\$ 538.78
33			#1 CU THWN	LF	915	5%	961	0.014	\$ 42.00	\$ 0.59	\$ 2.26	\$ 2.85	\$ 2,736.22
34			#3 CU THWN	LF	263	5%	277	0.012	\$ 42.00	\$ 0.50	\$ 1.66	\$ 2.16	\$ 598.59
35			#4 CU THWN	LF	578	5%	607	0.011	\$ 42.00	\$ 0.46	\$ 1.32	\$ 1.78	\$ 1,081.38
36			#6 CU THWN	LF	371	5%	389	0.010	\$ 42.00	\$ 0.42	\$ 0.86	\$ 1.28	\$ 498.07
37			#8 CU THWN	LF	228	5%	239	0.009	\$ 42.00	\$ 0.38	\$ 0.56	\$ 0.94	\$ 224.56
38			#12 CU THHN/THWN	LF	148	5%	155	0.007	\$ 42.00	\$ 0.29	\$ 0.25	\$ 0.54	\$ 84.38
CIRCUIT BREAKER:													
39			20A/1P CIRCUIT BREAKER, AFCI	EA	498	0%	498	0.450	\$ 42.00	\$ 18.90	\$ 37.00	\$ 55.90	\$ 27,838.20
40			20A/1P CIRCUIT BREAKER, GFCI	EA	6	0%	6	0.450	\$ 42.00	\$ 18.90	\$ 37.00	\$ 55.90	\$ 335.40
41			20A/2P CIRCUIT BREAKER	EA	107	0%	107	0.450	\$ 42.00	\$ 18.90	\$ 43.18	\$ 62.08	\$ 6,642.56
42			20A/3P CIRCUIT BREAKER	EA	2	0%	2	0.510	\$ 42.00	\$ 21.42	\$ 58.00	\$ 79.42	\$ 158.84
43			25A/1P CIRCUIT BREAKER	EA	1	0%	1	0.420	\$ 42.00	\$ 17.64	\$ 36.00	\$ 53.64	\$ 53.64
44			25A/2P CIRCUIT BREAKER	EA	4	0%	4	0.450	\$ 42.00	\$ 18.90	\$ 46.00	\$ 64.90	\$ 259.60
45			30A/1P CIRCUIT BREAKER	EA	4	0%	4	0.440	\$ 42.00	\$ 18.48	\$ 41.56	\$ 60.04	\$ 240.16
46			30A/2P CIRCUIT BREAKER	EA	2	0%	2	0.480	\$ 42.00	\$ 20.16	\$ 59.00	\$ 79.16	\$ 158.32
47			30A/2P CIRCUIT BREAKER, GFCI	EA	1	0%	1	0.480	\$ 42.00	\$ 20.16	\$ 59.00	\$ 79.16	\$ 79.16
48			30A/3P CIRCUIT BREAKER, GFCI	EA	3	0%	3	0.480	\$ 42.00	\$ 20.16	\$ 59.00	\$ 79.16	\$ 237.48
49			35A/2P CIRCUIT BREAKER	EA	2	0%	2	0.500	\$ 42.00	\$ 21.00	\$ 67.91	\$ 88.91	\$ 177.82
50			40A/2P CIRCUIT BREAKER	EA	1	0%	1	0.500	\$ 42.00	\$ 21.00	\$ 67.91	\$ 88.91	\$ 88.91
51			45A/1P CIRCUIT BREAKER	EA	1	0%	1	0.450	\$ 42.00	\$ 18.90	\$ 44.39	\$ 63.29	\$ 63.29
52			50A/2P CIRCUIT BREAKER	EA	11	0%	11	0.520	\$ 42.00	\$ 21.84	\$ 72.00	\$ 93.84	\$ 1,032.24
53			60A/2P CIRCUIT BREAKER	EA	3	0%	3	0.550	\$ 42.00	\$ 23.10	\$ 78.00	\$ 101.10	\$ 303.30
54			60A/3P CIRCUIT BREAKER	EA	4	0%	4	0.650	\$ 42.00	\$ 27.30	\$ 112.00	\$ 139.30	\$ 557.20
55			100A/3P CIRCUIT BREAKER	EA	1	0%	1	0.980	\$ 42.00	\$ 41.16	\$ 320.00	\$ 361.16	\$ 361.16
56			100A/3P MAIN CIRCUIT BREAKER	EA	1	0%	1	0.980	\$ 42.00	\$ 41.16	\$ 320.00	\$ 361.16	\$ 361.16
57			125A/3P CIRCUIT BREAKER	EA	1	0%	1	1.100	\$ 42.00	\$ 46.20	\$ 358.68	\$ 404.88	\$ 404.88
58			125A/3P MAIN CIRCUIT BREAKER	EA	1	0%	1	1.100	\$ 42.00	\$ 46.20	\$ 358.68	\$ 404.88	\$ 404.88
59			150A/3P CIRCUIT BREAKER	EA	1	0%	1	1.400	\$ 42.00	\$ 58.80	\$ 534.00	\$ 592.80	\$ 592.80
60			150A/3P MAIN CIRCUIT BREAKER	EA	1	0%	1	1.400	\$ 42.00	\$ 58.80	\$ 534.00	\$ 592.80	\$ 592.80
61			200A/3P CIRCUIT BREAKER	EA	3	0%	3	1.720	\$ 42.00	\$ 72.24	\$ 650.00	\$ 722.24	\$ 2,166.72
62			200A/3P MAIN CIRCUIT BREAKER	EA	1	0%	1	1.720	\$ 42.00	\$ 72.24	\$ 650.00	\$ 722.24	\$ 722.24
63			250A/3P CIRCUIT BREAKER	EA	2	0%	2	1.830	\$ 42.00	\$ 76.86	\$ 844.00	\$ 920.86	\$ 1,841.72
64			250A/3P MAIN CIRCUIT BREAKER	EA	2	0%	2	1.830	\$ 42.00	\$ 76.86	\$ 844.00	\$ 920.86	\$ 1,841.72
65			300A/3P CIRCUIT BREAKER	EA	4	0%	4	2.000	\$ 42.00	\$ 84.00	\$ 1,195.00	\$ 1,279.00	\$ 5,116.00
66			300A/3P MAIN CIRCUIT BREAKER	EA	4	0%	4	2.000	\$ 42.00	\$ 84.00	\$ 1,195.00	\$ 1,279.00	\$ 5,116.00
67			350A/3P CIRCUIT BREAKER	EA	2	0%	2	2.140	\$ 42.00	\$ 89.88	\$ 1,366.00	\$ 1,455.88	\$ 2,911.76
68			350A/3P MAIN CIRCUIT BREAKER	EA	2	0%	2	2.140	\$ 42.00	\$ 89.88	\$ 1,366.00	\$ 1,455.88	\$ 2,911.76
69			400A/3P CIRCUIT BREAKER	EA	1	0%	1	2.330	\$ 42.00	\$ 97.86	\$ 1,630.00	\$ 1,727.86	\$ 1,727.86
70			400A/3P MAIN CIRCUIT BREAKER	EA	1	0%	1	2.330	\$ 42.00	\$ 97.86	\$ 1,630.00	\$ 1,727.86	\$ 1,727.86
71			2000A/3P MAIN CIRCUIT BREAKER	EA	1	0%	1	8.000	\$ 42.00	\$ 336.00	\$ 13,907.00	\$ 14,243.00	\$ 14,243.00
PANEL:													
72			Panel EP, 350A, 120/208V, 3PH, 4W, Mains: MCB,	EA	1	0%	1	5.300	\$ 42.00	\$ 222.60	\$ 4,299.00	\$ 4,521.60	\$ 4,521.60
73			Panel LA1, 250A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	4.580	\$ 42.00	\$ 192.36	\$ 3,200.00	\$ 3,392.36	\$ 3,392.36
74			Panel LA2, 300A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	4.800	\$ 42.00	\$ 201.60	\$ 3,825.00	\$ 4,026.60	\$ 4,026.60
75			Panel LA3, 300A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	4.800	\$ 42.00	\$ 201.60	\$ 3,825.00	\$ 4,026.60	\$ 4,026.60
76			Panel LB1, 250A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	4.580	\$ 42.00	\$ 192.36	\$ 3,200.00	\$ 3,392.36	\$ 3,392.36
77			Panel LB2, 300A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	4.800	\$ 42.00	\$ 201.60	\$ 3,825.00	\$ 4,026.60	\$ 4,026.60
78			Panel LB3, 200A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	4.150	\$ 42.00	\$ 174.30	\$ 2,300.00	\$ 2,474.30	\$ 2,474.30
79			Panel LC1, 300A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	4.800	\$ 42.00	\$ 201.60	\$ 3,825.00	\$ 4,026.60	\$ 4,026.60
80			Panel LC2, 125A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	3.550	\$ 42.00	\$ 149.10	\$ 1,400.25	\$ 1,549.35	\$ 1,549.35
81			Panel LC3, 350A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	5.300	\$ 42.00	\$ 222.60	\$ 4,299.00	\$ 4,521.60	\$ 4,521.60
82			Panel LD4, 400A, 120/208V, 3PH, 4W, Mains: MCB	EA	1	0%	1	6.150	\$ 42.00	\$ 258.30	\$ 5,100.00	\$ 5,358.30	\$ 5,358.30
83			Panel MDP, 2000A, 120/208V, 3PH, 4W, Mains: MC	EA	1	0%	1	26.000	\$ 42.00	\$ 1,092.00	\$ 29,500.00	\$ 30,592.00	\$ 30,592.00

DETAILED BREAKDOWN OF ITEMS													
Prepared for: Project ID: Scope: ELECTRICAL										TOTAL TRADE COST		\$1,200.142	
										OH & PROFIT		\$120.014	
										INSURANCE		\$24.003	
										CONTINGENCY		\$36.004	
										TAX		\$61.397	
										SUGGESTED BID		\$1,441.560	
Date: 22/06/2022													
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
84			Panel PP, 150A, 120/208V, 3PH, 4W, Mains: MCB,	EA	1	0%	1	3.800	\$ 42.00	\$ 159.60	\$ 1,775.00	\$ 1,934.60	\$ 1,934.60
85			Panel SP, 100A, 120/208V, 3PH, 4W, Mains: MCB,	EA	1	0%	1	3.260	\$ 42.00	\$ 136.92	\$ 1,184.64	\$ 1,321.56	\$ 1,321.56
			DEVICES:										
86			175KW Standby Type, 120/240V, 3PH, 4W Gas GEN	EA	1	0%	1	85.000	\$ 42.00	\$ 3,570.00	\$ 107,093.00	\$ 110,663.00	\$ 110,663.00
87			350A, 4-Pole Service Entrance Rated ATS-2, NEMA	EA	1	0%	1	4.150	\$ 42.00	\$ 174.30	\$ 3,787.00	\$ 3,961.30	\$ 3,961.30
88			1200A, 4-Pole Service Entrance Rated ATS-1, NEMA	EA	1	0%	1	8.660	\$ 42.00	\$ 363.72	\$ 12,177.00	\$ 12,540.72	\$ 12,540.72
89			2000A, 3PH Meter Base, NEMA 1 Enclosure	EA	1	0%	1	15.990	\$ 42.00	\$ 671.58	\$ 20,655.00	\$ 21,326.58	\$ 21,326.58
90			Fire Pump Controller	EA	1	0%	1	2.570	\$ 42.00	\$ 107.94	\$ 2,900.00	\$ 3,007.94	\$ 3,007.94
91			Jockey Pump Controller	EA	1	0%	1	1.300	\$ 42.00	\$ 54.60	\$ 830.00	\$ 884.60	\$ 884.60
92			Surge Protection Device (For Fire Pump Control Panel)	EA	1	0%	1	1.150	\$ 42.00	\$ 48.30	\$ 440.00	\$ 488.30	\$ 488.30
			DISCONNECT SWITCH:										
93			20A/1P Disconnect Switch, NEMA 3R	EA	26	0%	26	0.688	\$ 42.00	\$ 28.90	\$ 116.63	\$ 145.53	\$ 3,783.68
94			20A/1P Disconnect Switch, NEMA 1	EA	8	0%	8	0.688	\$ 42.00	\$ 28.90	\$ 116.63	\$ 145.53	\$ 1,164.21
95			20A/2P Disconnect Switch, NEMA 1	EA	5	0%	5	0.688	\$ 42.00	\$ 28.90	\$ 116.63	\$ 145.53	\$ 727.63
96			20A/3P Disconnect Switch, NEMA 3R	EA	1	0%	1	0.688	\$ 42.00	\$ 28.90	\$ 116.63	\$ 145.53	\$ 145.53
97			25A/2P Disconnect Switch, NEMA 3R	EA	3	0%	3	0.750	\$ 42.00	\$ 31.50	\$ 158.86	\$ 190.36	\$ 571.08
98			30A/2P Disconnect Switch, NEMA 1	EA	2	0%	2	0.820	\$ 42.00	\$ 34.44	\$ 189.00	\$ 223.44	\$ 446.88
99			30A/3P Disconnect Switch, NEMA 1	EA	2	0%	2	0.820	\$ 42.00	\$ 34.44	\$ 189.00	\$ 223.44	\$ 446.88
100			40A/2P Disconnect Switch, NEMA 3R	EA	1	0%	1	0.900	\$ 42.00	\$ 37.80	\$ 233.00	\$ 270.80	\$ 270.80
101			50A/2P Disconnect Switch, NEMA 3R	EA	3	0%	3	1.050	\$ 42.00	\$ 44.10	\$ 271.00	\$ 315.10	\$ 945.30
102			60A/2P Disconnect Switch, NEMA 3R	EA	3	0%	3	1.380	\$ 42.00	\$ 57.96	\$ 326.00	\$ 383.96	\$ 1,151.88
103			60A/3P Disconnect Switch, NEMA 3R	EA	2	0%	2	1.380	\$ 42.00	\$ 57.96	\$ 326.00	\$ 383.96	\$ 767.92
104			60A/3P Disconnect Switch With 60A Current Limiter	EA	1	0%	1	1.380	\$ 42.00	\$ 57.96	\$ 326.00	\$ 383.96	\$ 383.96
105			200A/3P Disconnect Switch With 200A Current Limiter	EA	2	0%	2	2.200	\$ 42.00	\$ 92.40	\$ 835.55	\$ 927.95	\$ 1,855.90
106			1200A/3P Disconnect Switch With 1200A Current Limiter	EA	1	0%	1	15.890	\$ 42.00	\$ 667.38	\$ 11,066.00	\$ 11,733.38	\$ 11,733.38
			GROUNDING:										
107			3/4" X 10' CU Clad Ground Rod	EA	12	0%	12	0.480	\$ 42.00	\$ 20.16	\$ 37.49	\$ 57.65	\$ 691.80
108			Exothermic Weld	EA	6	0%	6	1.333	\$ 42.00	\$ 55.99	\$ -	\$ 55.99	\$ 335.92
109			Grounding Clamp (For Water Piping)	EA	4	0%	4	0.122	\$ 42.00	\$ 5.12	\$ 7.80	\$ 12.92	\$ 51.70
110			#3/0 Bare CU	LF	101	5%	106	0.017	\$ 42.00	\$ 0.71	\$ 4.31	\$ 5.02	\$ 531.21
111			#2 Bare CU	LF	20	5%	21	0.013	\$ 42.00	\$ 0.55	\$ 2.07	\$ 2.62	\$ 55.27
112			#6 Bare CU	LF	180	5%	189	0.010	\$ 42.00	\$ 0.42	\$ 0.86	\$ 1.28	\$ 242.18
			POWER										
			CONDUIT:										
113			1 1/2" EMT Conduit	LF	208	5%	218	0.090	\$ 42.00	\$ 3.78	\$ 3.38	\$ 7.16	\$ 1,560.14
114			1" EMT Conduit	LF	1134	5%	1190	0.070	\$ 42.00	\$ 2.94	\$ 1.70	\$ 4.64	\$ 5,522.80
115			1" FMC Conduit	LF	36	5%	38	0.070	\$ 42.00	\$ 2.94	\$ 1.70	\$ 4.64	\$ 175.39
116			1" LFMC Conduit	LF	60	5%	63	0.070	\$ 42.00	\$ 2.94	\$ 4.29	\$ 7.23	\$ 455.49
117			1" RGS Conduit	LF	12	5%	13	0.123	\$ 42.00	\$ 5.17	\$ 4.82	\$ 9.99	\$ 125.82
118			3/4" EMT Conduit	LF	22346	5%	23463	0.062	\$ 42.00	\$ 2.98	\$ 0.94	\$ 3.92	\$ 91,882.28
119			3/4" FMC Conduit	LF	6	5%	6	0.062	\$ 42.00	\$ 2.60	\$ 0.90	\$ 3.50	\$ 22.08
120			3/4" LFMC Conduit	LF	8	5%	8	0.062	\$ 42.00	\$ 2.60	\$ 3.63	\$ 6.23	\$ 52.37
121			3/4" PVC SCH 40 Conduit	LF	618	5%	649	0.050	\$ 42.00	\$ 2.10	\$ 0.84	\$ 2.94	\$ 1,907.77
122			1/2" EMT Conduit	LF	46631	5%	48963	0.047	\$ 42.00	\$ 1.97	\$ 0.54	\$ 2.51	\$ 123,091.85
123			1/2" FMC Conduit	LF	84	5%	88	0.047	\$ 42.00	\$ 1.97	\$ 0.65	\$ 2.62	\$ 231.44
124			1/2" LFMC Conduit	LF	222	5%	233	0.047	\$ 42.00	\$ 1.97	\$ 1.70	\$ 3.67	\$ 856.41
125			1/2" PVC SCH 40 Conduit	LF	68	5%	71	0.042	\$ 42.00	\$ 1.76	\$ 0.55	\$ 2.31	\$ 164.32
126			1/2" RGS Conduit	LF	202	5%	212	0.089	\$ 42.00	\$ 3.74	\$ 2.94	\$ 6.68	\$ 1,416.40
			CONDUCTOR:										
127			#6 CU THHN/THWN	LF	3043	5%	3195	0.010	\$ 42.00	\$ 0.42	\$ 0.86	\$ 1.28	\$ 4,089.79
128			#8 CU THHN/THWN	LF	1647	5%	1729	0.009	\$ 42.00	\$ 0.38	\$ 0.56	\$ 0.94	\$ 1,622.13
129			#10 CU THHN/THWN	LF	86701	5%	91036	0.008	\$ 42.00	\$ 0.34	\$ 0.38	\$ 0.72	\$ 65,181.81
130			#12 CU THHN/THWN	LF	119580	5%	125559	0.007	\$ 42.00	\$ 0.29	\$ 0.25	\$ 0.54	\$ 68,304.10
131			#18 CU THHN/THWN	LF	2530	5%	2657	0.005	\$ 42.00	\$ 0.21	\$ 0.09	\$ 0.30	\$ 797.04
132			#22 CU THHN/THWN	LF	2408	5%	2529	0.005	\$ 42.00	\$ 0.21	\$ 0.08	\$ 0.29	\$ 733.28
			DEVICE:										
133			20A Special Purpose Receptacle	EA	94	0%	94	0.250	\$ 42.00	\$ 10.50	\$ 17.69	\$ 28.19	\$ 2,649.86
134			30A Duplex Receptacle	EA	1	0%	1	0.250	\$ 42.00	\$ 10.50	\$ 21.00	\$ 31.50	\$ 31.50
135			35A GFCI Duplex Receptacle	EA	1	0%	1	0.250	\$ 42.00	\$ 10.50	\$ 28.66	\$ 39.16	\$ 39.16
136			45A GFCI Duplex Receptacle	EA	1	0%	1	0.250	\$ 42.00	\$ 10.50	\$ 28.66	\$ 39.16	\$ 39.16
137			Door Bell With Button & ON/OFF Switch	EA	5	0%	5	0.288	\$ 42.00	\$ 12.10	\$ 25.47	\$ 37.57	\$ 187.83
138			Door Contact & ZETTLER RELAY #AZ2280 WITH	EA	92	0%	92	0.167	\$ 42.00	\$ 7.00	\$ 10.02	\$ 17.02	\$ 1,565.58
139			Duplex Receptacle	EA	101	0%	101	0.250	\$ 42.00	\$ 10.50	\$ 23.00	\$ 33.50	\$ 3,383.50
140			Duplex Receptacle C/W Two Usb Port	EA	7	0%	7	0.250	\$ 42.00	\$ 10.50	\$ 23.00	\$ 33.50	\$ 234.50
141			Duplex Receptacle, GFCI	EA	127	0%	127	0.250	\$ 42.00	\$ 10.50	\$ 28.66	\$ 39.16	\$ 4,973.32
142			Duplex Receptacle, GFCI, With Built-In White Night	EA	92	0%	92	0.250	\$ 42.00	\$ 10.50	\$ 28.66	\$ 39.16	\$ 3,602.72
143			Duplex Receptacle, GFCI, WP	EA	25	0%	25	0.250	\$ 42.00	\$ 10.50	\$ 28.66	\$ 39.16	\$ 979.00
144			Floor Box With Duplex Receptacle And Data Outlet	EA	4	0%	4	0.330	\$ 42.00	\$ 13.86	\$ 45.95	\$ 59.81	\$ 239.24
145			Floor Mounted Duplex Receptacle	EA	4	0%	4	0.250	\$ 42.00	\$ 10.50	\$ 23.00	\$ 33.50	\$ 134.00
146			Floor Mounted GFCI Receptacle	EA	1	0%	1	0.250	\$ 42.00	\$ 10.50	\$ 28.66	\$ 39.16	\$ 39.16
147			GFCI Duplex Receptacle, NEMA 5-15R	EA	7	0%	7	0.250	\$ 42.00	\$ 10.50	\$ 28.66	\$ 39.16	\$ 274.12
148			GFCI Duplex Receptacle, NEMA 5-20R	EA	2	0%	2	0.250	\$ 42.00	\$ 10.50	\$ 28.66	\$ 39.16	\$ 78.32
149			GFCI Duplex Receptacle, NEMA 6-15R	EA	1	0%	1	0.250	\$ 42.00	\$ 10.50	\$ 28.66	\$ 39.16	\$ 39.16
150			GFCI Quad Receptacle	EA	1	0%	1	0.250	\$ 42.00	\$ 10.50	\$ 31.00	\$ 41.50	\$ 41.50
151			Half Switched Duplex Receptacle	EA	212	0%	212	0.200	\$ 42.00	\$ 8.40	\$ 11.17	\$ 19.57	\$ 4,148.84
152			Half Switched Quad-Plex Receptacle	EA	120	0%	120	0.200	\$ 42.00	\$ 8.40	\$ 11.17	\$ 19.57	\$ 2,348.40
153			IG Quad Receptacle	EA	22	0%	22	0.200	\$ 42.00	\$ 8.40	\$ 18.25	\$ 26.65	\$ 586.30
154			Push Button (For Doorbell)	EA	5	0%	5	0.158	\$ 42.00	\$ 6.64	\$ 13.99	\$ 20.63	\$ 103.13
155			Quad Receptacle	EA	4	0%	4	0.250	\$ 42.00	\$ 10.50	\$ 31.00	\$ 41.50	\$ 166.00
156			Quad-Plex Receptacle	EA	92	0%	92	0.250	\$ 42.00	\$ 10.50	\$ 31.00	\$ 41.50	\$ 3,818.00
157			Single Pole Toggle Switch	EA	3	0%	3	0.138	\$ 42.00	\$ 5.80	\$ 7.99	\$ 13.79	\$ 41.36
158			Weatherproof GFCI Duplex Receptacle In Cast Weather	EA	14	0%	14	0.320	\$ 42.00	\$ 13.44	\$ 36.48	\$ 49.92	\$ 698.88
159			Junction Box (For VERDANT Thermostat With Built-In	EA	92	0%	92	0.155	\$ 42.00</				

DETAILED BREAKDOWN OF ITEMS

Prepared for:
Project ID:
Scope: **ELECTRICAL**

TOTAL TRADE COST	\$1,200,142
OH & PROFIT	\$120,014
INSURANCE	\$24,003
CONTINGENCY	\$36,004
TAX	\$61,397
SUGGESTED BID	\$1,441,560

Date: 22/06/2022

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
165			3/4" EMT Conduit	LF	1132	5%	1189	0.062	\$ 42.00	\$ 2.98	\$ 0.94	\$ 3.92	\$ 4,655.01
166			1/2" EMT Conduit	LF	5837	5%	6128	0.047	\$ 42.00	\$ 1.97	\$ 0.54	\$ 2.51	\$ 15,406.90
			CONDUCTOR:										
167			#10 CU THHN/THWN	LF	13283	5%	13947	0.008	\$ 42.00	\$ 0.34	\$ 0.38	\$ 0.72	\$ 9,986.21
168			#12 CU THHN/THWN	LF	7414	5%	7784	0.007	\$ 42.00	\$ 0.29	\$ 0.25	\$ 0.54	\$ 4,234.72
			LIGHTING FIXTURES:										
169			A, 36" VANITY, SARIN SES-VF-3FT-36W	EA	92	0%	92	0.520	\$ 42.00	\$ 21.84	\$ 44.95	\$ 66.79	\$ 6,144.68
170			D, 6 DOWNLIGHT, SARIN SES-DL6-CCT-14	EA	141	0%	141	0.500	\$ 42.00	\$ 21.00	\$ 29.68	\$ 50.68	\$ 7,145.88
171			D1, 6" DOWNLIGHT, SARIN SES-CDL6-3000-27	EA	17	0%	17	0.500	\$ 42.00	\$ 21.00	\$ 29.68	\$ 50.68	\$ 861.56
172			E, 1X4 PANEL, SARIN SES-PI-4000-40-1X4	EA	36	0%	36	0.950	\$ 42.00	\$ 39.90	\$ 87.50	\$ 127.40	\$ 4,586.40
173			F, 4" CCT ADJUSTABLE DOWNLIGHT, SARIN SES-ADL4-4000-40	EA	118	0%	118	0.500	\$ 42.00	\$ 21.00	\$ 22.33	\$ 43.33	\$ 5,112.94
174			G, 4" WRAPAROUND, SARIN SES-WR-4000-48	EA	12	0%	12	0.950	\$ 42.00	\$ 39.90	\$ 87.50	\$ 127.40	\$ 1,528.80
175			H, DECORATIVE CEILING LAMP, DAMP LOCATED	EA	92	0%	92	2.300	\$ 42.00	\$ 96.60	\$ 479.00	\$ 575.60	\$ 52,955.20
176			H1, 6 DOWNLIGHT, SARIN SES-DL36-15-4000	EA	97	0%	97	0.500	\$ 42.00	\$ 21.00	\$ 29.68	\$ 50.68	\$ 4,915.90
177			K, SARIN SELECTED BY OWNER/ ARCHITECT	EA	54	0%	54	0.950	\$ 42.00	\$ 39.90	\$ 87.50	\$ 127.40	\$ 6,879.60
178			L, 5 METER STRIP LIGHT w/ LINEAR CHANNEL	LF	163	0%	163	0.200	\$ 42.00	\$ 8.40	\$ 18.66	\$ 27.06	\$ 4,398.33
179			N, 4" GIMBAL DOWNLIGHT, SARIN SES-4"-GIMBAL	EA	14	0%	14	0.500	\$ 42.00	\$ 21.00	\$ 32.55	\$ 53.55	\$ 749.70
180			P, 2x4" TROFFER, CCT & WATTAGE ADJUSTABLE	EA	27	0%	27	0.900	\$ 42.00	\$ 37.80	\$ 84.00	\$ 121.80	\$ 3,288.60
181			PA-203, SARIN SELECTED BY OWNER/ ARCHITECT	EA	2	0%	2	0.900	\$ 42.00	\$ 37.80	\$ 84.00	\$ 121.80	\$ 243.60
182			PA-206, SARIN SELECTED BY OWNER/ ARCHITECT	EA	10	0%	10	0.900	\$ 42.00	\$ 37.80	\$ 84.00	\$ 121.80	\$ 1,218.00
183			R, 2x2" TROFFER, CCT & WATTAGE ADJUSTABLE	EA	35	0%	35	0.900	\$ 42.00	\$ 37.80	\$ 84.00	\$ 121.80	\$ 4,263.00
184			R1, OUTDOOR AREA LIGHT, SARIN SELECTED	EA	7	0%	7	0.800	\$ 42.00	\$ 33.60	\$ 59.97	\$ 93.57	\$ 654.99
185			RECESSED CAN LIGHT EQUAL TO INTERLUX MODEL	EA	15	0%	15	0.500	\$ 42.00	\$ 21.00	\$ 27.00	\$ 48.00	\$ 720.00
186			S1, SARIN SELECTED BY OWNER	EA	1	0%	1	0.820	\$ 42.00	\$ 34.44	\$ 155.00	\$ 189.44	\$ 189.44
187			SE, FLOOD LIGHT, SARIN SES-FL06-3000-30 LAMP	EA	19	0%	19	0.760	\$ 42.00	\$ 31.92	\$ 169.99	\$ 201.91	\$ 3,836.29
188			SF, 7.5IN DISK LIGHT, SURFACE MOUNTABLE	EA	3	0%	3	0.600	\$ 42.00	\$ 25.20	\$ 73.00	\$ 98.20	\$ 294.60
189			SF1, 6 DOWNLIGHT, SARIN SES-CDL6-3000-27	EA	15	0%	15	0.600	\$ 42.00	\$ 25.20	\$ 64.00	\$ 89.20	\$ 1,338.00
190			SF2, 6 DOWNLIGHT, SARIN SES-CDL6-3000-27	EA	10	0%	10	0.600	\$ 42.00	\$ 25.20	\$ 64.00	\$ 89.20	\$ 892.00
191			X1, EXIT SIGN w/ BATTERY BACKUP, SARIN SELECTED	EA	13	0%	13	0.580	\$ 42.00	\$ 24.36	\$ 58.99	\$ 83.35	\$ 1,083.55
192			X2, EXIT SIGN w/ BATTERY BACKUP, SARIN SELECTED	EA	9	0%	9	0.580	\$ 42.00	\$ 24.36	\$ 58.99	\$ 83.35	\$ 750.15
193			X3, EXIT SIGN w/ BATTERY BACKUP, SARIN SELECTED	EA	19	0%	19	0.580	\$ 42.00	\$ 24.36	\$ 58.99	\$ 83.35	\$ 1,583.65
194			X4, EMERGENCY LIGHTS w/ BATTERY BACKUP	EA	99	0%	99	0.580	\$ 42.00	\$ 24.36	\$ 58.99	\$ 83.35	\$ 8,251.65
195			X5, EXIT SIGN w/ BATTERY BACKUP, SARIN SELECTED	EA	4	0%	4	0.580	\$ 42.00	\$ 24.36	\$ 58.99	\$ 83.35	\$ 333.40
196			X6, EMERGENCY LIGHTS w/ BATTERY BACKUP	EA	6	0%	6	0.580	\$ 42.00	\$ 24.36	\$ 58.99	\$ 83.35	\$ 500.10
			LIGHTING CONTROL:										
197			Dimmer Switch	EA	3	0%	3	0.160	\$ 42.00	\$ 6.72	\$ 12.99	\$ 19.71	\$ 59.13
198			Dimming Control Panel	EA	1	0%	1	2.000	\$ 42.00	\$ 84.00	\$ 835.50	\$ 919.50	\$ 919.50
199			Keyed Switch	EA	3	0%	3	0.200	\$ 42.00	\$ 8.40	\$ 24.29	\$ 32.69	\$ 98.07
200			Occupancy Sensor Switch	EA	92	0%	92	0.160	\$ 42.00	\$ 6.72	\$ 12.00	\$ 18.72	\$ 1,722.24
201			Occupancy Sensor With Override Switch	EA	1	0%	1	0.160	\$ 42.00	\$ 6.72	\$ 12.00	\$ 18.72	\$ 18.72
202			Single Pole Switch	EA	200	0%	200	0.138	\$ 42.00	\$ 5.84	\$ 7.99	\$ 13.79	\$ 2,757.20
203			Wall Occupancy Sensor C/W Override Switch	EA	24	0%	24	0.220	\$ 42.00	\$ 9.24	\$ 36.43	\$ 45.67	\$ 1,096.08
204			30A Mechanically Held Contactor, NEMA 1, SQUARE D	EA	1	0%	1	1.680	\$ 42.00	\$ 70.56	\$ 735.00	\$ 805.56	\$ 805.56
205			Ceiling Mounted Occupancy Sensor, WATTSTOPPER	EA	5	0%	5	0.720	\$ 42.00	\$ 30.24	\$ 85.00	\$ 115.24	\$ 576.20
			COMMUNICATION SYSTEM ROUGH-IN										
			CONDUIT:										
206			4" PVC SCH 40 Conduit With Pullstring	LF	204	5%	214	0.178	\$ 42.00	\$ 7.48	\$ 5.68	\$ 13.16	\$ 2,819.40
207			3/4" EMT Conduit With Pullstring Up to Ceiling	LF	6285	5%	6599	0.062	\$ 42.00	\$ 2.98	\$ 0.94	\$ 3.92	\$ 25,842.66
			COMMUNICATION DEVICES:										
208			Cable TV Board	EA	1	0%	1		\$ 42.00	\$ -		\$ -	\$ -
209			Card Reader	EA	6	0%	6		\$ 42.00	\$ -		\$ -	\$ -
210			Card Reader, WP	EA	2	0%	2		\$ 42.00	\$ -		\$ -	\$ -
211			Data Outlet	EA	92	0%	92		\$ 42.00	\$ -		\$ -	\$ -
212			Duplex Voice/Data Outlet	EA	17	0%	17		\$ 42.00	\$ -		\$ -	\$ -
213			Intercom	EA	2	0%	2		\$ 42.00	\$ -		\$ -	\$ -
214			Security Board	EA	1	0%	1		\$ 42.00	\$ -		\$ -	\$ -
215			Telephone Back BoardBoard	EA	1	0%	1		\$ 42.00	\$ -		\$ -	\$ -
216			Telephone Outlet	EA	106	0%	106		\$ 42.00	\$ -		\$ -	\$ -
217			Television Outlet	EA	97	0%	97		\$ 42.00	\$ -		\$ -	\$ -
218			Voice/Data Outlet	EA	92	0%	92		\$ 42.00	\$ -		\$ -	\$ -
219			Wireless Access Point	EA	2	0%	2		\$ 42.00	\$ -		\$ -	\$ -
220			Back Box	EA	419	0%	419	0.100	\$ 42.00	\$ 4.20	\$ 4.39	\$ 8.59	\$ 3,599.21
			FIRE ALARM SYSTEM ROUGH-IN										
			CONDUIT:										
221			3/4" EMT Conduit With Pullstring	LF	5265	5%	5528	0.062	\$ 42.00	\$ 2.98	\$ 0.94	\$ 3.92	\$ 21,648.63
			FIRE ALARM DEVICES:										
222			2-Way Communication System	EA	8	0%	8		\$ 42.00	\$ -		\$ -	\$ -
223			Carbon Monoxide Detector	EA	3	0%	3		\$ 42.00	\$ -		\$ -	\$ -
224			Combination Horn/Strobe Light	EA	36	0%	36		\$ 42.00	\$ -		\$ -	\$ -
225			Fire Alarm Control Panel	EA	1	0%	1		\$ 42.00	\$ -		\$ -	\$ -
226			Fire Alarm Manual Pull Station	EA	1	0%	1		\$ 42.00	\$ -		\$ -	\$ -
227			Fire Bell, WP	EA	1	0%	1		\$ 42.00	\$ -		\$ -	\$ -
228			Flow Switch	EA	1	0%	1		\$ 42.00	\$ -		\$ -	\$ -
229			Guestroom Annunciator Audio	EA	87	0%	87		\$ 42.00	\$ -		\$ -	\$ -
230			Guestroom Annunciator Audio/Visual	EA	8	0%	8		\$ 42.00	\$ -		\$ -	\$ -
231			Heat Detector	EA	13	0%	13		\$ 42.00	\$ -		\$ -	\$ -
232			Magnetic Door Holder	EA	14	0%	14		\$ 42.00	\$ -		\$ -	\$ -
233			Smoke Detector	EA	164	0%	164		\$ 42.00	\$ -		\$ -	\$ -
234			Strobe Light	EA	13	0%	13		\$ 42.00	\$ -		\$ -	\$ -
235			Tamper Switch	EA	1	0%	1		\$ 42.00	\$ -		\$ -	\$ -
236			Back Box	EA	351	0%	351	0.100	\$ 42.00	\$ 4.20	\$ 4.39	\$ 8.59	\$ 3,015.09
			MISCELLANEOUS										
237			Concrete Duct Bank	CY	6	0%	6	3.000	\$ 42.00	\$ 126.00	\$ 255.00	\$ 381.00	\$ 2,393.15
238			Concrete Pad (For 2000A Main Distribution Board Main Breaker)	EA	1	0%	1	4.000	\$ 42.00	\$ 168.00	\$ 800.00	\$ 968.00	\$ 968.00
239			Concrete Pad (For Utility Transformer)	EA	1	0%	1	4.000	\$ 42.00	\$ 168.00	\$ 1,100.00	\$ 1,268.00	\$ 1,268.00
240			Junction Box	EA	14	0%	14	0.160	\$ 42.00	\$ 6.72	\$ 10.69	\$ 17.41	\$ 243.74
241			Junction Box, WP	EA	19	0%	19	0.160	\$ 42.00	\$ 6.72	\$ 15.22	\$ 21.94	\$ 416.86
			TRENCHING & BACKFILLING:										
242			Excavation & Backfilling (2" Deep x 1" Wide Trench)	CLF	3524	0%	3524	0.085	\$ 42.00	\$ 3.57	\$ -	\$ 3.57	\$ 12,580.68
												SUBTOTAL	\$ 1,134,864
												PROJECTED COST	\$1,200,142
OVERHEAD AND PROFIT												10%	\$120,014
INSURANCE												2%	\$24,003
CONTINGENCY												3%	\$36,004
TAX												9%	\$61,397
SUGGESTED BID													
\$1,441,560													