


GENERAL SUMMARY

PROJECT ID:
ADDRESS:
SCOPE: G.C.
DATE: 13-Jun-24
PREPARED BY:

DIVISION NO.	DESCRIPTION	Material Cost	Labor Cost	TOTAL DIV. COST
0	GENERAL REQUIREMENT	\$ -	\$ 157,888	\$ 157,888
DIV. 02	EXISTING CONDITIONS	\$ -	\$ 79,062	\$ 79,062
DIV. 3	CONCRETE	\$ 47,909	\$ 56,491	\$ 104,400
DIV. 4	MASONRY	\$ 44,757	\$ 44,176	\$ 88,933
DIV. 5	METALS	\$ 64,317	\$ 29,071	\$ 93,387
DIV. 6	WOOD, PLASTICS & COMPOSITES	\$ 87,482	\$ 5,364	\$ 92,846
DIV. 7	THERMAL & MOISTURE PROTECTION	\$ 55,853	\$ 23,090	\$ 78,943
DIV. 8	OPENINGS	\$ 138,729	\$ 23,461	\$ 162,190
DIV. 9	FINISHES	\$ 157,459	\$ 138,447	\$ 295,906
DIV. 10	SPECIALTY	\$ 9,875	\$ 2,496	\$ 12,371
DIV. 11	EQUIPMENT	\$ 42,984	\$ 4,923	\$ 47,907
DIV. 12	FURNISHINGS	\$ 23,332	\$ 2,783	\$ 26,114
DIV. 22	PLUMBING	\$ 97,189	\$ 37,656	\$ 134,845
DIV. 23	HVAC	\$ 85,076	\$ 27,330	\$ 112,406
DIV. 26	ELECTRICAL	\$ 138,394	\$ 55,234	\$ 193,629
DIV. 28	ELECTRONIC SAFETY & SECURITY	\$ 41,117	\$ 18,705	\$ 59,822
DIV. 31	EARTHWORK	\$ 5,314	\$ 2,533	\$ 7,848
DIV. 32	SITE IMPROVEMENT	\$ 68,970	\$ 40,001	\$ 108,971
DIV. 33	UTILITY	\$ 117,978	\$ 15,785	\$ 133,764
TOTAL TRADE COST		\$ 1,226,736	\$ 764,495	\$ 1,991,231
TOTAL MATERIAL COST				\$ 1,226,736
TOTAL LABOR COST				\$ 764,495
TOTAL TRADES COST				\$ 1,991,231
SALES TAX			8%	\$ 95,072.05
OVERHEAD & PROFIT			15%	\$ 298,684.65
INSURANCE & BONDING			3%	\$ 59,736.93
BID AMOUNT				\$ 2,444,725
TOTAL LABOR HOURS				

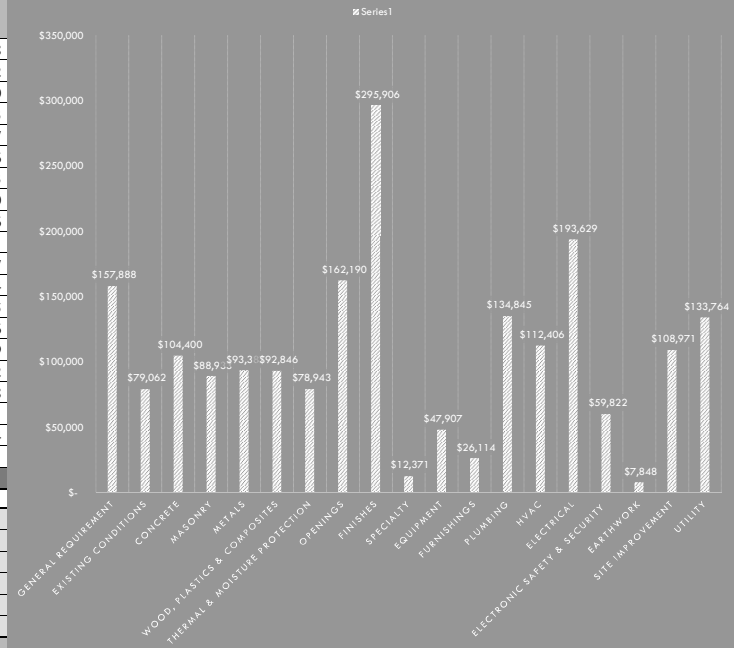

PROJECT ID:	TOTAL MATERIAL COST		\$ 1,226,736.19
ADDRESS:	TOTAL LABOR COST		\$ 764,494.82
SCOPE: GC	TOTAL TRADES COST		\$ 1,991,231.01
DATE: 12-Aug-24	SALES TAX	7.75%	\$ 95,072.05
GROSS AREA: 10784	OVERHEAD & PROFIT	15.00%	\$ 298,684.65
PREPARED BY:	INSURANCE & BONDING	3.00%	\$ 59,736.93
	BID AMOUNT		\$ 2,444,724.65

LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL	TOTAL COST	LABOR	LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
							UNIT COST								
DIV. 01		GENERAL REQUIREMENTS					SUBTOTAL	\$ -	0.00					\$ 157,888.00	\$ 157,888.00
1		Permits, Supervision and Coordination, Submittals and Shop drawings, Mobilization Costs, Project Overheads, Final Clearing	LS	1	0%	1	\$ -	\$ -	0.00	\$ -	\$ -	\$ -	\$ -	\$ 157,888.00	\$ 157,888.00
DIV. 02		EXISTING CONDITIONS					SUBTOTAL	\$ -	125.01					\$ 79,661.77	\$ 79,661.77
		IT DEMOLITION													
2		Sound Masking System Loudspeaker	EA	45	0%	45	\$ -	\$ -	0.680	\$ 30.60	\$ 42.00	\$ 28.56	\$ 1,285.20	\$ 1,285.20	
3		Remove Existing Combination Outlet	EA	41	0%	41	\$ -	\$ -	1.55	\$ 12.30	\$ 42.00	\$ 65.10	\$ 516.60	\$ 516.60	
4		Remove Existing Intermcom Style Speaker	EA	4	0%	4	\$ -	\$ -	0.530	\$ 2.12	\$ 42.00	\$ 22.26	\$ 89.04	\$ 89.04	
5		Remove Existing IT Wiring & Conduits	SF	6510	0%	6510	\$ -	\$ -	0.012	\$ 78.12	\$ 42.00	\$ 0.50	\$ 3,281.10	\$ 3,281.10	
		PLUMBING DEMOLITION													
6		Remove Existing 3/4" Propane Pipe	LF	143	0%	143	\$ -	\$ -	0.068	\$ 9.72	\$ 42.00	\$ 2.86	\$ 408.24	\$ 408.24	
7		Remove Existing 1/2" Water Pipe	LF	186	0%	186	\$ -	\$ -	0.068	\$ 12.64	\$ 42.00	\$ 2.86	\$ 530.76	\$ 530.76	
8		Remove Existing 1-1/2" Water Pipe	LF	72	0%	72	\$ -	\$ -	0.068	\$ 4.90	\$ 42.00	\$ 2.86	\$ 205.60	\$ 205.60	
9		Remove Existing Slab	SF	282	0%	282	\$ -	\$ -	0.060	\$ 16.94	\$ 42.00	\$ 2.52	\$ 711.40	\$ 711.40	
10		Remove Existing Gas Regulator	EA	1	0%	1	\$ -	\$ -	0.880	\$ 0.88	\$ 42.00	\$ 36.96	\$ 36.96	\$ 36.96	
		Remove Existing Staff Lounge Sink													
		-Dishwasher	EA	1	0%	1	\$ -	\$ -	1.700	\$ 1.70	\$ 42.00	\$ 71.40	\$ 71.40	\$ 71.40	
		-Associated C.W. H.W. Waste & Vent Pipe Area													
12		Remove Existing Fountain & Associated Pipe	EA	1	0%	1	\$ -	\$ -	4.120	\$ 4.12	\$ 42.00	\$ 173.04	\$ 173.04	\$ 173.04	
13		Remove Existing Mop Sink & Associated Pipe	EA	1	0%	1	\$ -	\$ -	1.200	\$ 1.20	\$ 42.00	\$ 50.40	\$ 50.40	\$ 50.40	
14		Remove Existing Water Heater & Associated Pipe	EA	1	0%	1	\$ -	\$ -	3.000	\$ 3.00	\$ 42.00	\$ 126.00	\$ 126.00	\$ 126.00	
		Remove existing Well Water Bladder Tank													
		-Filter	EA	1	0%	1	\$ -	\$ -	8.280	\$ 8.28	\$ 42.00	\$ 347.76	\$ 347.76	\$ 347.76	
		-Associated Piping													
		-Valve													
		-Controller													
16		Remove Existing Water closet & Associated Pipe	EA	1	0%	1	\$ -	\$ -	1.900	\$ 1.90	\$ 42.00	\$ 79.80	\$ 79.80	\$ 79.80	
17		Remove Existing LAV Sink	EA	1	0%	1	\$ -	\$ -	1.55	\$ 12.30	\$ 42.00	\$ 65.10	\$ 65.10	\$ 65.10	
18		Remove Existing LAV Sink & Store For Future Use	EA	3	0%	3	\$ -	\$ -	1.550	\$ 4.65	\$ 42.00	\$ 65.10	\$ 195.30	\$ 195.30	
19		Remove Existing Water closet & Store For Future Use	EA	1	0%	1	\$ -	\$ -	1.900	\$ 1.90	\$ 42.00	\$ 79.80	\$ 79.80	\$ 79.80	
		HVAC DEMOLITION													
20		Remove Existing Duct	LF	815	0%	815	\$ -	\$ -	0.050	\$ 40.77	\$ 42.00	\$ 2.10	\$ 1,712.19	\$ 1,712.19	
21		Remove Existing Dampers & Associated Controls	EA	1	0%	1	\$ -	\$ -	0.680	\$ 0.68	\$ 42.00	\$ 28.56	\$ 28.56	\$ 28.56	
22		Remove Existing Exhaust	EA	20	0%	20	\$ -	\$ -	1.190	\$ 23.80	\$ 42.00	\$ 49.98	\$ 999.60	\$ 999.60	
23		Remove Existing Zone Damper Control Panel	EA	1	0%	1	\$ -	\$ -	0.500	\$ 0.50	\$ 42.00	\$ 21.00	\$ 21.00	\$ 21.00	
24		Remove Existing Ceiling Diffuser	EA	27	0%	27	\$ -	\$ -	0.380	\$ 10.26	\$ 42.00	\$ 15.96	\$ 430.92	\$ 430.92	
25		Remove Existing Return Air Grill	EA	3	0%	3	\$ -	\$ -	0.380	\$ 1.14	\$ 42.00	\$ 15.96	\$ 47.88	\$ 47.88	
26		Remove Existing Thermostat	EA	5	0%	5	\$ -	\$ -	0.500	\$ 2.50	\$ 42.00	\$ 21.00	\$ 105.00	\$ 105.00	
27		Remove Existing RTU-1 and Associated Equipment, Controller	EA	1	0%	1	\$ -	\$ -	5.330	\$ 5.33	\$ 42.00	\$ 223.86	\$ 223.86	\$ 223.86	
28		Remove Existing Wood Support	EA	2	0%	2	\$ -	\$ -	0.550	\$ 1.10	\$ 42.00	\$ 23.10	\$ 46.20	\$ 46.20	
29		Remove Existing Air Cooler Condenser Unit	EA	1	0%	1	\$ -	\$ -	3.900	\$ 3.90	\$ 42.00	\$ 163.80	\$ 163.80	\$ 163.80	
		ELECTRICAL DEMOLITION													
30		Remove & Disconnect Existing Interior Light Fixture, Switches, Backbones Conduit & Wiring Back To Panel Board Or Upstream ETR Light Fixture	SF	6393	0%	6393	\$ -	\$ -	0.015	\$ 95.89	\$ 42.00	\$ 0.63	\$ 4,027.36	\$ 4,027.36	
31		Remove & Disconnect Existing Call For Aid Call Equipment, Conduit, Back box, Devices And Wiring	SF	6393	0%	6393	\$ -	\$ -	0.008	\$ 51.14	\$ 42.00	\$ 0.34	\$ 2,147.92	\$ 2,147.92	
32		Remove & Disconnect Existing All Final Connection, Disconnect Switches, Outlets, Conduit & Wiring For Plumbing Equipment Back to Panel Board	SF	6393	0%	6393	\$ -	\$ -	0.012	\$ 76.71	\$ 42.00	\$ 0.50	\$ 3,221.89	\$ 3,221.89	
33		Remove & Disconnect Existing All Final Connection, Disconnect Switches, Outlets, Conduit & Wiring For HVAC Equipment Back to Panel Board	SF	6393	0%	6393	\$ -	\$ -	0.008	\$ 51.14	\$ 42.00	\$ 0.34	\$ 2,147.92	\$ 2,147.92	
34		Remove & Disconnect Existing Receptacle, Back Box, Conduit & Wiring Back To panel board Or Upstream ETR Devices	SF	6393	0%	6393	\$ -	\$ -	0.005	\$ 31.96	\$ 42.00	\$ 0.21	\$ 1,342.45	\$ 1,342.45	
35		Remove & Disconnect Existing Panel Board & Existing Branch	EA	2	0%	2	\$ -	\$ -	3.500	\$ 7.00	\$ 42.00	\$ 147.00	\$ 294.00	\$ 294.00	
36		Remove & Disconnect Existing Enclosure, Circuit Breaker, C&I	EA	1	0%	1	\$ -	\$ -	1.200	\$ 1.20	\$ 42.00	\$ 50.40	\$ 50.40	\$ 50.40	
37		Remove & Disconnect Existing Double Throw Disconnect Switch	EA	1	0%	1	\$ -	\$ -	0.880	\$ 0.88	\$ 42.00	\$ 36.96	\$ 36.96	\$ 36.96	
		ARCHITECTURAL DEMOLITION													
38		Remove Existing Concrete Slab	SF	214.73	0%	215	\$ -	\$ -	0.060	\$ 12.88	\$ 42.00	\$ 2.52	\$ 541.12	\$ 541.12	
39		Remove Existing Awaiting Fabric	SF	96	0%	96	\$ -	\$ -	0.120	\$ 11.46	\$ 42.00	\$ 5.04	\$ 481.32	\$ 481.32	
40		Remove Existing Floor Finish	SF	5738	0%	5738	\$ -	\$ -	0.022	\$ 126.23	\$ 42.00	\$ 0.92	\$ 5,301.63	\$ 5,301.63	
41		Remove Existing Ceiling w/ Framing	SF	5738	0%	5738	\$ -	\$ -	0.035	\$ 200.82	\$ 42.00	\$ 1.47	\$ 8,434.40	\$ 8,434.40	
42		Remove Existing Ceiling Soft w/ Framing (3'-0" H)	SF	174	0%	174	\$ -	\$ -	0.035	\$ 6.09	\$ 42.00	\$ 1.47	\$ 255.78	\$ 255.78	
43		Rebuild All Bath Accessories	EA	4	0%	4	\$ -	\$ -	0.380	\$ 1.52	\$ 42.00	\$ 15.96	\$ 53.84	\$ 53.84	
44		Remove Marker Board & Related Fasteners	EA	1	0%	1	\$ -	\$ -	0.670	\$ 0.67	\$ 42.00	\$ 28.14	\$ 28.14	\$ 28.14	
45		Remove Mechanical Equipment	EA	1	0%	1	\$ -	\$ -	2.800	\$ 2.80	\$ 42.00	\$ 117.60	\$ 117.60	\$ 117.60	
46		Remove Existing Equipment	EA	7	0%	7	\$ -	\$ -	1.500	\$ 10.50	\$ 42.00	\$ 63.00	\$ 441.00	\$ 441.00	
47		Remove Fridge	EA	1	0%	1	\$ -	\$ -	1.000	\$ 1.00	\$ 42.00	\$ 42.00	\$ 42.00	\$ 42.00	
48		Remove Monitor	EA	2	0%	2	\$ -	\$ -	0.830	\$ 1.64	\$ 42.00	\$ 34.44	\$ 68.88	\$ 68.88	
49		Remove Panel Room Sign	EA	4	0%	4	\$ -	\$ -	0.450	\$ 1.80	\$ 42.00	\$ 18.90	\$ 75.60	\$ 75.60	
50		Remove Plumbing Fixture	EA	2	0%	2	\$ -	\$ -	1.900	\$ 3.80	\$ 42.00	\$ 79.80	\$ 159.60	\$ 159.60	
51		Remove Sink	EA	1	0%	1	\$ -	\$ -	1.550	\$ 1.55	\$ 42.00	\$ 65.10	\$ 65.10	\$ 65.10	
52		Remove Vanity	EA	4	0%	4	\$ -	\$ -	1.900	\$ 7.60	\$ 42.00	\$ 79.80	\$ 319.20	\$ 319.20	
53		Remove Water Closet	EA	4	0%	4	\$ -	\$ -	1.900	\$ 7.60	\$ 42.00	\$ 79.80	\$ 319.20	\$ 319.20	
		MILLWORK													
54		Remove Base Cabinet (3'-0" H)	LF	23.05	0%	23	\$ -	\$ -	0.255	\$ 5.88	\$ 42.00	\$ 10.71	\$ 246.87	\$ 246.87	
55		Remove Upper Cabinet (3'-0" H)	LF	24	0%	24	\$ -	\$ -	0.200	\$ 2.00	\$ 42.00	\$ 8.40	\$ 200.51	\$ 200.51	
56		Remove Closet Shelf, Pole, & Supporting Cleats	LF	16	0%	16	\$ -	\$ -	0.120	\$ 1.90	\$ 42.00	\$ 5.04	\$ 79.98	\$ 79.98	
57		Remove Casework	EA	5	0%	5	\$ -	\$ -	4.550	\$ 22.75	\$ 42.00	\$ 191.10	\$ 955.50	\$ 955.50	
		WALLS													
58		Remove Exterior Wall (3'-0" H)	SF	60	0%	60	\$ -	\$ -	0.028	\$ 1.67	\$ 42.00	\$ 1.18	\$ 70.03	\$ 70.03	
59		Remove Exterior Wall (6'-0" H)	SF	70.26	0%	70	\$ -	\$ -	0.028	\$ 1.97	\$ 42.00	\$ 1.18	\$ 82.63	\$ 82.63	
60		Remove Exterior Wall (4'-0"x4'-0" H)	SF	16	0%	16	\$ -	\$ -	0.028	\$ 0.45	\$ 42.00	\$ 1.18	\$ 18.82	\$ 18.82	
61		Remove Interior Partition Wall (2'-0" H)	SF	29	0%	29	\$ -	\$ -	0.025	\$ 4.73	\$ 42.00	\$ 1.05	\$ 30.51	\$ 30.51	
62		Remove Interior Partition Wall (9'-0" H)	SF	3673	0%	3673	\$ -	\$ -	0.025	\$ 91.83	\$ 42.00	\$ 1.05	\$ 3,856.83	\$ 3,856.83	
		DOORS & WINDOWS													
63		Remove Storefront (8'-0" H) (Window & Doors)	EA	1	0%	1	\$ -	\$ -	3.600	\$ 3.60	\$ 42.00	\$ 151.20	\$ 151.20	\$ 151.20	
64		Remove Existing Door w/ Frame (3'-0"x 7'-0")	EA	19	0%	19	\$ -	\$ -	1.220	\$ 23.18	\$ 42.00	\$ 51.24	\$ 973.56	\$ 973.56	
65		Remove Existing Double Door w/ Frame (6'-0"x 7'-0")	EA	2	0%	2	\$ -	\$ -	1.600	\$ 3.30	\$ 42.00	\$ 69.30	\$ 138.60	\$ 138.60	
66		Remove Existing Window (3'-4"x4'-0")	EA	14	0%	14	\$ -	\$ -	1.050	\$ 14.00	\$ 42.00	\$ 42.00	\$ 588.00	\$ 588.00	
67		Remove Existing Window (6'-0"x4'-0")	EA	2	0%	2	\$ -	\$ -	1.350	\$ 2.70	\$ 42.00	\$ 56.70	\$ 113.40	\$ 113.40	
68		Remove Existing Glazing Window w/ Frame (19'-9" x 4'-0")	EA	1	0%	1	\$ -	\$ -	6.560	\$ 6.56	\$ 42.00	\$ 275.52	\$ 275.52	\$ 275.52	
69		Remove Windows Treatments (6'-0"x4'-0")	EA	1	0%	1	\$ -	\$ -	0.680	\$ 0.68	\$ 42.00	\$ 28.56	\$ 28.56	\$ 28.56	
70		Remove Windows Treatments (4'-0"x4'-0")	EA	2	0%	2	\$ -	\$ -	0.680	\$ 1.36	\$ 42.00	\$ 28.56	\$ 57.12	\$ 57.12	
71		Remove Windows Treatments (6'-0"x4'-0")	EA	1	0%	1	\$ -	\$ -	0.880	\$ 0.88	\$ 42.00	\$ 36.96	\$ 36.96	\$ 36.96	
72		Remove Windows Treatments (9'-0"x4'-0")	EA	2	0%	2	\$ -	\$ -	0.920	\$ 1.84	\$ 42.00	\$ 38.64	\$ 77.28	\$ 77.28	
		SITE DEMOLITION													
73		Remove Existing Pavement	SF	12864	0%	12864	\$ -	\$ -	0.048	\$ 617.46	\$ 42.00	\$ 2.02	\$ 25,933.24	\$ 25,933.24	
74		Remove Existing Concrete Pad	SF	108	0%	108	\$ -	\$ -	0.060	\$ 6.51	\$ 42.00	\$ 2.52	\$ 273.27	\$ 273.27	
75		Remove Existing Stone Mulch	SF	878	0%	878	\$ -	\$ -	0.015	\$ 47.13	\$ 42.00	\$ 0.55	\$ 553.99	\$ 553.99	
76		Remove Existing Concrete Side Walk	SF	301	0%	301	\$ -	\$ -	0.040	\$ 12.02	\$ 42.00	\$ 1.68	\$ 505.01	\$ 505.01	
77		Remove Existing Ice Land	EA	1	0%	1	\$ -	\$ -	12.560	\$ 12.56	\$ 42.00	\$ 527.52	\$ 527.52	\$ 527.52	
78		Remove Existing Tree	EA	1	0%	1	\$ -	\$ -	6.850	\$ 6.85	\$ 42.00	\$ 287.70	\$ 287.70	\$ 287.70	
79		Remove Existing Roof Leader	EA	1	0%	1	\$ -	\$ -	3.550	\$ 3.55	\$ 42.00	\$ 149.10	\$ 149.10	\$ 149.10	
80		Remove Existing Pump, Water Service & Electric Line	EA	1	0%	1	\$ -	\$ -	4.380	\$ 4.38	\$ 42.0				

COST ESTIMATE BREAKDOWN

PROJECT ID:				TOTAL MATERIAL COST					\$ 1,226,736.19
ADDRESS:				TOTAL LABOR COST					\$ 764,494.82
SCOPE: GC				TOTAL TRADES COST					\$ 1,991,231.01
DATE: 12-Aug-24				SALES TAX				7.75%	\$ 95,072.05
GROSS AREA: 10784				OVERHEAD & PROFIT				15.00%	\$ 298,684.65
PREPARED BY:				INSURANCE & BONDING				3.00%	\$ 59,736.93
				BID AMOUNT					\$ 2,444,724.65

LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL UNIT COST	TOTAL COST	LABOR UNIT LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
DIV. 3		CONCRETE						SUBTOTAL \$ 47,909.06	55.21				\$ 56,490.81	104,399.88
		FOUNDATION												
		CONCRETE PAD FOOTING												
86		F-4.0: 4'-0" x 4'-0" x 1'-4" Concrete Pad Footing	EA	2	4	4	1.33							
87		Concrete	CY	2	5%	2	\$ 195.00	\$ 322.75	2.780	\$ 4.60	\$ 60.00	\$ 166.80	\$ 276.07	\$ 598.82
88		Reinforcement: 3- #6 Each Way	LBS	72	10%	79	\$ 1.10	\$ 87.24	0.015	\$ 1.19	\$ 45.00	\$ 0.68	\$ 53.53	\$ 140.77
89		Formwork	SF	43	10%	47	\$ -	\$ 0.090	\$ 4.21	\$ 42.00	\$ 3.78	\$ 176.96	\$ 176.96	\$ 176.96
90		Excavation	CY	4	10%	5	\$ -	\$ -	1.100	\$ 5.22	\$ 42.00	\$ 46.20	\$ 219.28	\$ 219.28
91		Backfill	CY	3	10%	3	\$ -	\$ -	0.785	\$ 2.36	\$ 42.00	\$ 32.97	\$ 99.32	\$ 99.32
92		F-3.5.6: 3'-6" x 3'-6" x 1'-4" Concrete Pad Footing	EA	2	3.5	3.5	1.33							
93		Concrete	CY	1	5%	1	\$ 195.00	\$ 247.10	2.780	\$ 3.52	\$ 60.00	\$ 166.80	\$ 211.37	\$ 458.47
94		Reinforcement: 3- #6 Each Way	LBS	63	10%	69	\$ 1.10	\$ 76.33	0.015	\$ 1.04	\$ 45.00	\$ 0.68	\$ 46.84	\$ 123.17
95		Formwork	SF	37	10%	41	\$ -	\$ 0.090	\$ 3.69	\$ 42.00	\$ 3.78	\$ 154.84	\$ 154.84	\$ 154.84
96		Excavation	CY	3	10%	4	\$ -	\$ 1.100	\$ 4.23	\$ 42.00	\$ 46.20	\$ 177.62	\$ 177.62	\$ 177.62
97		Backfill	CY	2	10%	3	\$ -	\$ -	0.785	\$ 1.98	\$ 42.00	\$ 32.97	\$ 82.98	\$ 82.98
		CONTINUOUS CONCRETE FOOTING												
98		2'-4"W x 1'-0" H Concrete Footing	LF	171	2.33	1								
99		Concrete	CY	15	10%	16	\$ 195.00	\$ 3,165.31	2.780	\$ 45.13	\$ 60.00	\$ 166.80	\$ 2,707.55	\$ 5,872.86
100		Reinforcement: 3- #5 Bar & #3 Bar @ 12" O.C	LBS	686	10%	754	\$ 1.10	\$ 829.75	0.015	\$ 11.31	\$ 45.00	\$ 0.68	\$ 509.17	\$ 1,338.92
101		Formwork	SF	342	10%	376	\$ -	\$ 0.090	\$ 33.86	\$ 42.00	\$ 3.78	\$ 1,422.04	\$ 1,422.04	\$ 1,422.04
102		Excavation	CY	84	10%	93	\$ -	\$ 1.100	\$ 102.08	\$ 42.00	\$ 46.20	\$ 4,287.18	\$ 4,287.18	\$ 4,287.18
103		Backfill	CY	54	10%	59	\$ -	\$ -	0.785	\$ 46.49	\$ 42.00	\$ 32.97	\$ 1,952.37	\$ 1,952.37
104		2'-4"W x 1'-0" H Concrete Footing	LF	56	2.33	1								
105		Concrete	CY	5	10%	5	\$ 195.00	\$ 1,036.59	2.780	\$ 14.78	\$ 60.00	\$ 166.80	\$ 886.68	\$ 1,923.28
106		Reinforcement: 3- #5 Bar & #3 Bar @ 12" O.C	LBS	225	10%	248	\$ 1.10	\$ 272.44	0.015	\$ 3.72	\$ 45.00	\$ 0.68	\$ 167.18	\$ 439.63
107		Formwork	SF	112	10%	123	\$ -	\$ 0.090	\$ 11.09	\$ 42.00	\$ 3.78	\$ 465.70	\$ 465.70	\$ 465.70
108		Excavation	CY	7	10%	8	\$ -	\$ -	1.100	\$ 8.36	\$ 42.00	\$ 46.20	\$ 351.00	\$ 351.00
109		Backfill	CY	2	10%	2	\$ -	\$ -	0.785	\$ 1.79	\$ 42.00	\$ 32.97	\$ 75.22	\$ 75.22
110		1'-6"W x 1'-0" H Concrete Footing	LF	56	1.5	1								
111		Concrete	CY	3	10%	3	\$ 195.00	\$ 667.33	2.780	\$ 9.51	\$ 60.00	\$ 166.80	\$ 570.83	\$ 1,238.16
112		Reinforcement: 3- #5 Bar & #3 Bar @ 12" O.C	LBS	207	10%	228	\$ 1.10	\$ 250.92	0.015	\$ 3.42	\$ 45.00	\$ 0.68	\$ 153.97	\$ 404.89
113		Formwork	SF	112	10%	123	\$ -	\$ 0.090	\$ 11.09	\$ 42.00	\$ 3.78	\$ 465.70	\$ 465.70	\$ 465.70
114		Excavation	CY	16	10%	17	\$ -	\$ 1.100	\$ 18.82	\$ 42.00	\$ 46.20	\$ 790.53	\$ 790.53	\$ 790.53
115		Backfill	CY	7	10%	8	\$ -	\$ 0.785	\$ 6.29	\$ 42.00	\$ 32.97	\$ 264.02	\$ 264.02	\$ 264.02
116		2'-0"W x 1'-0" H Concrete Footing	LF	131	2	1								
117		Concrete	CY	10	10%	11	\$ 195.00	\$ 2,081.44	2.780	\$ 29.67	\$ 60.00	\$ 166.80	\$ 1,780.44	\$ 3,861.88
118		Reinforcement: 3- #5 Bar & #3 Bar @ 12" O.C	LBS	509	10%	560	\$ 1.10	\$ 616.09	0.015	\$ 8.40	\$ 45.00	\$ 0.68	\$ 378.05	\$ 994.14
119		Formwork	SF	262	10%	288	\$ -	\$ 0.090	\$ 25.94	\$ 42.00	\$ 3.78	\$ 1,089.40	\$ 1,089.40	\$ 1,089.40
120		Excavation	CY	44	10%	48	\$ -	\$ 1.100	\$ 52.84	\$ 42.00	\$ 46.20	\$ 2,219.14	\$ 2,219.14	\$ 2,219.14
121		Backfill	CY	22	10%	24	\$ -	\$ -	0.785	\$ 18.89	\$ 42.00	\$ 32.97	\$ 793.59	\$ 793.59
122		4'-0"W x 1'-4" H Concrete Footing	LF	69	4	1.33								
123		Concrete	CY	14	10%	15	\$ 195.00	\$ 2,916.25	2.780	\$ 41.58	\$ 60.00	\$ 166.80	\$ 2,494.51	\$ 5,410.76
124		Reinforcement: 7- #5 Bar & #3 Bar @ 12" O.C	LBS	609	10%	670	\$ 1.10	\$ 736.95	0.015	\$ 10.05	\$ 45.00	\$ 0.68	\$ 452.22	\$ 1,189.17
125		Formwork	SF	184	10%	202	\$ -	\$ 0.090	\$ 18.17	\$ 42.00	\$ 3.78	\$ 763.16	\$ 763.16	\$ 763.16
126		Excavation	CY	17	10%	19	\$ -	\$ 1.100	\$ 20.56	\$ 42.00	\$ 46.20	\$ 863.66	\$ 863.66	\$ 863.66
127		Backfill	CY	3	10%	4	\$ -	\$ 0.785	\$ 2.93	\$ 42.00	\$ 32.97	\$ 123.27	\$ 123.27	\$ 123.27
128		2'-4"W x 1'-4" H Concrete Footing	LF	64	2.33	1.33								
129		Concrete	CY	7	10%	8	\$ 195.00	\$ 1,575.62	2.780	\$ 22.46	\$ 60.00	\$ 166.80	\$ 1,347.76	\$ 2,923.38
130		Reinforcement: 3- #5 Bar & #3 Bar @ 12" O.C	LBS	524	10%	577	\$ 1.10	\$ 634.29	0.015	\$ 8.65	\$ 45.00	\$ 0.68	\$ 389.23	\$ 1,023.52
131		Formwork	SF	170	10%	187	\$ -	\$ 0.090	\$ 16.85	\$ 42.00	\$ 3.78	\$ 707.86	\$ 707.86	\$ 707.86
132		Excavation	CY	10	10%	12	\$ -	\$ 1.100	\$ 12.70	\$ 42.00	\$ 46.20	\$ 533.52	\$ 533.52	\$ 533.52
133		Backfill	CY	3	10%	3	\$ -	\$ -	0.785	\$ 2.72	\$ 42.00	\$ 32.97	\$ 114.34	\$ 114.34
		THICKEN EDGE												
134		Thicken Edge	CY	5	10%	5	\$ 195.00	\$ 986.30	2.400	\$ 12.14	\$ 60.00	\$ 144.00	\$ 728.35	\$ 1,714.65
135		Reinforcement: 2- #5 Bar	LBS	134	10%	147	\$ 1.10	\$ 161.54	0.015	\$ 2.20	\$ 45.00	\$ 0.68	\$ 99.13	\$ 260.67
		CONCRETE COLUMN												
136		MP-1: 8" x 40" Concrete Column	EA	5	0.667	3.33	2.5							
137		Concrete	CY	1.03	5%	1.08	\$ 195.00	\$ 210.54	2.780	\$ 3.00	\$ 60.00	\$ 166.80	\$ 180.10	\$ 390.64
138		Reinforcement: 14- #5 Vert., #3@16" O.C	LBS	703	10%	774	\$ 1.10	\$ 851.21	0.015	\$ 11.61	\$ 45.00	\$ 0.68	\$ 522.33	\$ 1,373.54
139		Formwork	SF	100	10%	110	\$ -	\$ 0.090	\$ 9.89	\$ 42.00	\$ 3.78	\$ 415.49	\$ 415.49	\$ 415.49
140		MP-2: 8" x 24" Concrete Column	EA	2	0.667	2	2.5							
141		Concrete	CY	0.25	5%	0.26	\$ 195.00	\$ 50.58	2.780	\$ 0.72	\$ 60.00	\$ 166.80	\$ 43.27	\$ 93.85
142		Reinforcement: 6 x 6-W2.9 x W2.9 W.W.F	LBS	123	10%	135	\$ 1.10	\$ 148.64	0.015	\$ 2.03	\$ 45.00	\$ 0.68	\$ 91.21	\$ 239.86
143		Formwork	SF	27	10%	29	\$ -	\$ -	0.090	\$ 2.64	\$ 42.00	\$ 3.78	\$ 110.89	\$ 110.89
		SLAB												
144		4" Thick Concrete Slab	CY	2	10%	2	\$ 195.00	\$ 472.85	2.400	\$ 5.82	\$ 60.00	\$ 144.00	\$ 349.18	\$ 822.04
145		Reinforcement: W14xW1.4 6/6 WWM	SF	60	10%	65	\$ 0.56	\$ 36.66	0.010	\$ 0.65	\$ 45.00	\$ 0.45	\$ 29.46	\$ 66.13
146		Formwork	SF	21	10%	23	\$ -	\$ -	0.090	\$ 2.09	\$ 42.00	\$ 3.78	\$ 87.82	\$ 87.82
		F-1: 6" Thick Concrete Slab												
147		Concrete	SF	2950										
148		Reinforcement: 6 x 6-W2.9 x W2.9 W.W.F	CY	54.63	10%	60	\$ 195.00	\$ 11,718.06	2.400	\$ 144.22	\$ 60.00	\$ 144.00	\$ 8,653.33	\$ 20,371.39
149		Rigid Insulation	SF	21	10%	23	\$ 1.88	\$ 43.68	0.015	\$ 0.35	\$ 45.00	\$ 0.68	\$ 15.68	\$ 59.36
150		4" Layer Of 3/4" Crushed Stone On Compacted Structural Fill	CY	36	10%	40	\$ 1.00	\$ 1,626.11	0.850	\$ 33.71	\$ 42.00	\$ 35.70	\$ 1,415.90	\$ 3,042.01
		F-2: 6" Thick Concrete Slab												
151		Concrete	CY	54.63	10%	60	\$ 195.00	\$ 11,718.06	2.400	\$ 144.22	\$ 60.00	\$ 144.00	\$ 8,653.33	\$ 20,371.39
152		Reinforcement: 6 x 6-W2.9 x W2.9 W.W.F	SF	2950	10%	3245	\$ 0.56	\$ 1,817.20	0.010	\$ 32.45	\$ 45.00	\$ 0.45	\$ 1,460.25	\$ 3,277.45
153		12" Compacted Structural Fill	CY	36	10%	40	\$ 16.99	\$ 673.84	0.650	\$ 25.48	\$ 42.00	\$ 27.30	\$ 1,082.75	\$ 1,756.59
		CONTROLL JOINT												
154		Control Joint	LF	342	10%	376	\$ 0.16	\$ 60.19	0.028	\$ 10.53	\$ 45.00	\$ 1.26	\$ 474.01	\$ 534.20

COST ESTIMATE BREAKDOWN

	DIV. 5	METALS							SUBTOTAL	\$ 6,316.60	4.13					\$	29,070.53	\$ 93,387.43
		MEZZANINE																
		STRUCTURAL STEEL																
		BEAM																
182		W8 x 21 Beam	LBS	1522	10%	1675	\$	2.11	\$ 3,533.24	0.020	\$	33.49	\$ 48.00	\$	0.96	\$ 1,607.54	\$ 5,140.77	
183		W8 x 10	LBS	22	10%	24	\$	2.11	\$ 50.83	0.020	\$	0.48	\$ 48.00	\$	0.96	\$ 23.13	\$ 73.96	
184		W8 x 28	LBS	622	10%	684	\$	2.11	\$ 1,442.73	0.020	\$	13.68	\$ 48.00	\$	0.96	\$ 656.41	\$ 2,099.14	
185		C8 x 11.5	LBS	28	10%	31	\$	1.55	\$ 47.45	0.020	\$	0.61	\$ 48.00	\$	0.96	\$ 29.39	\$ 76.84	
186		L4" x 4" x 5/8" Angle	LBS	320	10%	352	\$	1.55	\$ 545.01	0.020	\$	7.03	\$ 48.00	\$	0.96	\$ 337.55	\$ 882.56	
		METAL DECK																
187		20 Gauge Composite Metal Deck W/ W/ Re	SF	167	10%	184	\$	3.55	\$ 653.31	0.040	\$	7.36	\$ 48.00	\$	1.92	\$ 353.34	\$ 1,006.64	
188		4" Concrete Toning	CY	2	10%	2	\$	195.00	\$ 438.60	2.110	\$	4.75	\$ 60.00	\$	126.60	\$ 284.76	\$ 723.36	
189		Reinforcement # 6 x 6-W2.9 x W2.9 WWF	SF	167	10%	184	\$	0.56	\$ 103.06	0.010	\$	1.84	\$ 45.00	\$	0.45	\$ 82.81	\$ 185.87	
190		#3 Dowel @ 12" O.C	LBS	189	10%	207	\$	1.10	\$ 228.10	0.015	\$	3.11	\$ 45.00	\$	0.68	\$ 139.97	\$ 368.06	
191		#3 Temp. Reinforcement @ 12" O.C	SF	167	10%	184	\$	1.10	\$ 202.43	0.015	\$	2.76	\$ 45.00	\$	0.68	\$ 124.22	\$ 326.65	
		RAILING																
192		Handrail w/ Supported brackets -1-1/2" Dia	LF	36	10%	40	\$	52.00	\$ 2,059.20	0.200	\$	7.92	\$ 48.00	\$	9.60	\$ 380.16	\$ 2,439.36	
193		Steel Guardrail (3'-6" H) - Picket @ 3" O.C	LF	28	10%	31	\$	80.00	\$ 2,464.00	0.260	\$	8.01	\$ 48.00	\$	12.48	\$ 384.38	\$ 2,848.38	
		STAIR																
194		MC 12 x 40 Stringer	LBS	2573	10%	2830	\$	1.55	\$ 4,386.62	0.020	\$	56.60	\$ 48.00	\$	0.96	\$ 2,716.88	\$ 7,103.50	
195		7" H x 11" D Metal Stair Step 5'-4" W.	EA	16	0%	16	\$	211.00	\$ 3,376.00	0.880	\$	14.08	\$ 48.00	\$	42.24	\$ 675.84	\$ 4,051.84	
		ROOF FRAMING																
		STRUCTURAL STEEL																
		ROOF JOIST																
196		24K9 Roof Joist	LF	684	10%	752	\$	11.40	\$ 8,571.21	0.060	\$	45.11	\$ 48.00	\$	2.88	\$ 2,165.36	\$ 10,736.57	
		BEAM																
197		W16 x 26	LBS	371	10%	408	\$	2.11	\$ 861.14	0.020	\$	8.16	\$ 48.00	\$	0.96	\$ 391.80	\$ 1,252.93	
198		W18 x 40	LBS	968	10%	1065	\$	2.11	\$ 2,246.73	0.020	\$	21.90	\$ 48.00	\$	0.96	\$ 1,022.28	\$ 3,269.04	
199		W16 x 31	LBS	589	10%	648	\$	2.11	\$ 1,346.35	0.020	\$	12.95	\$ 48.00	\$	0.96	\$ 621.66	\$ 1,988.01	
200		HSS 12 x 4	LBS	1067	10%	1173	\$	2.11	\$ 2,476.04	0.020	\$	23.47	\$ 48.00	\$	0.96	\$ 1,126.54	\$ 3,602.58	
201		L6" x 4" x 3/8"	LBS	2697	10%	2967	\$	1.55	\$ 4,599.05	0.020	\$	59.34	\$ 48.00	\$	0.96	\$ 2,848.44	\$ 7,447.49	
202		L 5 x 5 x 5/16	LBS	2311	10%	2542	\$	1.55	\$ 3,940.27	0.020	\$	50.84	\$ 48.00	\$	0.96	\$ 2,440.43	\$ 6,380.70	
203		L 5 x 3-1/2 x 5/16	LBS	157	10%	172	\$	1.55	\$ 267.00	0.020	\$	3.45	\$ 48.00	\$	0.96	\$ 165.37	\$ 432.37	
		BRACING																
204		Steel Angle Bracing	LF	566	10%	623	\$	5.88	\$ 3,662.18	0.042	\$	26.16	\$ 48.00	\$	2.02	\$ 1,255.61	\$ 4,917.79	
		COLUMN																
205		HSS 5 x 5 x 0.756"	LBS	569	10%	625	\$	2.11	\$ 1,319.72	0.020	\$	12.51	\$ 48.00	\$	0.96	\$ 600.44	\$ 1,920.16	
206		HSS 8 x 8 x 0.756"	LBS	872	10%	959	\$	2.11	\$ 2,024.14	0.020	\$	19.19	\$ 48.00	\$	0.96	\$ 920.94	\$ 2,945.08	
207		HSS 12 x 4 x 0.756"	LBS	630	10%	693	\$	2.11	\$ 1,462.23	0.020	\$	13.86	\$ 48.00	\$	0.96	\$ 665.28	\$ 2,127.51	
		BASE PLATE																
208		14" x 14" x 1"	LBS	56	10%	61	\$	1.55	\$ 95.23	0.020	\$	1.23	\$ 48.00	\$	0.96	\$ 58.98	\$ 154.20	
209		12" x 12" x 1"	LBS	41	10%	45	\$	1.55	\$ 69.56	0.020	\$	0.90	\$ 48.00	\$	0.96	\$ 43.08	\$ 112.65	
210		9" x 10" x 1"	LBS	25	10%	28	\$	1.55	\$ 43.31	0.020	\$	0.56	\$ 48.00	\$	0.96	\$ 26.83	\$ 70.14	
211		12" x 8" x 3/4"	LBS	20	10%	22	\$	1.55	\$ 34.80	0.020	\$	0.45	\$ 48.00	\$	0.96	\$ 21.55	\$ 56.35	
		TOP PLATE																
212		9" x 14" x 1/2"	LBS	18	10%	20	\$	1.55	\$ 30.55	0.020	\$	0.39	\$ 48.00	\$	0.96	\$ 18.92	\$ 49.48	
213		8" x 12" x 1/2"	LBS	14	10%	15	\$	1.55	\$ 23.22	0.020	\$	0.30	\$ 48.00	\$	0.96	\$ 14.38	\$ 37.61	
214		9" x 8" x 1/2"	LBS	10	10%	11	\$	1.55	\$ 17.42	0.020	\$	0.22	\$ 48.00	\$	0.96	\$ 10.79	\$ 28.20	
		ROOF																
215		1-1/2" Deep 22 Gauge Metal Deck	SF	3246	10%	3571	\$	3.27	\$ 11,675.86	0.040	\$	142.82	\$ 48.00	\$	1.92	\$ 6,855.55	\$ 18,531.41	

DIV. 7		THERMAL & MOISTURE PROTECTION										SUBTOTAL		\$	55,853.35	0.468			\$	23,090.02	\$	78,943.36
		WATERPROOFING																				
226	Lap Sealant	LF	471	10%	518	\$	0.52	\$	269.41	0.010	5.18	\$	45.00	\$	0.45	\$	233.15	\$	502.56			
227	All Purpose Sealant Over Flashing Head	LF	68	10%	75	\$	0.40	\$	29.92	0.010	0.75	\$	45.00	\$	0.45	\$	33.66	\$	63.58			

PROJECT ID:		TOTAL MATERIAL COST		\$ 1,226,736.19
ADDRESS:		TOTAL LABOR COST		\$ 764,494.82
SCOPE:	GC	TOTAL TRADES COST		\$ 1,991,231.01
DATE:	12-Aug-24	SALES TAX	7.75%	\$ 95,072.05
GROSS AREA:	10784	OVERHEAD & PROFIT	15.00%	\$ 298,684.65
PREPARED BY:		INSURANCE & BONDING	3.00%	\$ 59,736.93
		BID AMOUNT		\$ 2,444,724.65
		TOTAL LABOR HOURS		

LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL		LABOR		LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
							UNIT COST	TOTAL COST	UNIT LABOR HOUR						
228		Compressible Tube W/ Diameter	LF	65	10%	72	\$ 1.42	\$ 101.53	0.020	1.43	\$ 45.00	\$ 0.90	\$ 64.35	\$ 165.88	
		ROOFING													
229		Tapered Insulation -Base Insulation -Cover Board	SF	387	10%	426	\$ 1.88	\$ 800.32	0.015	6.39	\$ 45.00	\$ 0.68	\$ 287.35	\$ 1,087.66	
230		Fully Adhered EPDM Membrane Roofing -1/2" Cover Board -2.4" Base Layer Insulation	SF	10065	10%	11072	\$ 4.22	\$ 46,721.73	0.038	420.72	\$ 45.00	\$ 1.71	\$ 18,932.27	\$ 65,654.00	
		ROOF ACCESSORIES													
231		K Style Coated Metal Gutter Hanger W/ -Cross Bar	LF	221	10%	243	\$ 5.67	\$ 1,378.38	0.042	10.21	\$ 45.00	\$ 1.89	\$ 459.46	\$ 1,837.84	
232		Drip Edge	LF	221	10%	243	\$ 3.45	\$ 838.70	0.035	8.51	\$ 45.00	\$ 1.58	\$ 382.88	\$ 1,221.58	
233		Down Spout	LF	76	10%	84	\$ 4.85	\$ 405.46	0.048	4.01	\$ 45.00	\$ 2.16	\$ 180.58	\$ 586.04	
		FLASHING													
234		Two Layers Membrane Flashing	LF	226	10%	249	\$ 2.25	\$ 559.35	0.025	6.22	\$ 45.00	\$ 1.13	\$ 279.68	\$ 839.03	
235		Metal Edge Flashing W/ Continuous Clean	LF	221	10%	243	\$ 2.25	\$ 546.98	0.030	7.29	\$ 45.00	\$ 1.35	\$ 328.19	\$ 875.16	
236		5/8" W. Fully Adhered Flashing	LF	347	10%	382	\$ 2.45	\$ 935.17	0.025	9.54	\$ 45.00	\$ 1.13	\$ 429.41	\$ 1,364.58	
		Roof Edge Coping System -Roof Manufacturers Warranty Approved	LF	293	10%	322	\$ 3.45	\$ 1,111.94	0.035	11.28	\$ 45.00	\$ 1.58	\$ 507.62	\$ 1,619.56	
238		Splice Tape W/ Prime	LF	478	10%	526	\$ 2.70	\$ 1,419.66	0.028	14.22	\$ 45.00	\$ 1.26	\$ 662.51	\$ 2,082.17	
239		Membrane & Shiplap Facia Finish	LF	63	10%	69	\$ 3.60	\$ 253.64	0.032	2.72	\$ 45.00	\$ 1.44	\$ 99.79	\$ 353.43	
240		Metal Cap Flashing W/ Termination Bar	LF	56	10%	62	\$ 2.35	\$ 138.40	0.035	1.54	\$ 45.00	\$ 1.33	\$ 69.30	\$ 207.80	
241		Metal Reglet Flashing W/ Cap Receiver	LF	56	10%	62	\$ 2.30	\$ 197.12	0.025	1.54	\$ 45.00	\$ 1.13	\$ 69.30	\$ 216.42	
242		Full Adhere Membrane Flashing	SF	57	10%	63	\$ 3.22	\$ 145.46	0.025	1.57	\$ 45.00	\$ 1.13	\$ 70.54	\$ 266.00	

	DIV. 8	OPENINGS					SUBTOTAL	\$ 138,728.93	141,541				\$ 23,461.20	\$ 162,190.13
		DOORS												
243		3'-0" x 6'-8" Hollow Metal Door W/ Hollow Metal Frame	EA	35	0%	35	\$ 1,435.00	\$ 50,225.00	3,700	129.50	\$ 50.00	\$ 185.00	\$ 6,475.00	\$ 56,700.00
244		6' x 7'-0" Double Door W/ -Frame	EA	3	0%	3	\$ 2,655.00	\$ 7,965.00	6,680	20.04	\$ 50.00	\$ 334.00	\$ 1,002.00	\$ 8,967.00
245		3'-9" x 7'-0"Wood Sliding Door W/ +Frame Finish: Stained	EA	1	0%	1	\$ 1,990.00	\$ 1,990.00	4,330	4.33	\$ 50.00	\$ 216.50	\$ 216.50	\$ 2,206.50
246		14'-0" x 12'-0" Overhead Door	EA	3	0%	3	\$ 8,366.00	\$ 25,098.00	9,895	29.69	\$ 50.00	\$ 494.75	\$ 1,484.25	\$ 26,582.25
		HARDWARE'S												
		Hardware Set 002	EA	1										
247		Hinge, Continuous Geared -CFM 83 SLF HD1 RHR SER QC12 -Penko	EA	1	0%	1	\$ 144.60	\$ 144.60	1,120	1.12	\$ 50.00	\$ 56.00	\$ 56.00	\$ 200.60
248		Mortar Guard -NG-16 -McKinney	EA	1	0%	1	\$ 45.99	\$ 45.99	0,450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 68.49
249		Power Transfer -Power Transfer Door Wire Harness -Securiton	EA	1	0%	1	\$ 160.76	\$ 160.76	1,000	1.00	\$ 50.00	\$ 50.00	\$ 50.00	\$ 210.76
250		Power Transfer -Power Transfer Frame Wire Harness -Securiton	EA	1	0%	1	\$ 160.76	\$ 160.76	1,000	1.00	\$ 50.00	\$ 50.00	\$ 50.00	\$ 210.76
251		Electrically Unlocked -ML20906 SEC NSA 626 RHR M17 M91 M92 24 Volt AC/DC -Corbin-Russwin	EA	1	0%	1	\$ 1,005.29	\$ 1,005.29	3,250	3.25	\$ 50.00	\$ 162.50	\$ 162.50	\$ 1,167.79
252		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1,200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
253		Perimeter Gasket Bracket -BKT050G -Penko	EA	1	0%	1	\$ 23.24	\$ 23.24	0,400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 43.24
254		Kick Plate -K1050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0,450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37
255		Weatherstrip -290AS (Jamb Gasket 2ea. per opg.) 84" -Penko	EA	2	0%	2	\$ 61.57	\$ 123.14	0,400	0.80	\$ 50.00	\$ 20.00	\$ 40.00	\$ 163.14
256		Door Bottom Sweep -31SCN 36" -Penko	EA	1	0%	1	\$ 55.00	\$ 55.00	0,520	0.52	\$ 50.00	\$ 26.00	\$ 26.00	\$ 81.00
257		Overhead Rain Drip -346C 40" -Penko	EA	1	0%	1	\$ 72.00	\$ 72.00	0,750	0.75	\$ 50.00	\$ 37.50	\$ 37.50	\$ 109.50
258		Threshold -195A 192A 196A (Supp) 195A (Frame Depth + 1/2") All Welded -Penko	EA	1	0%	1	\$ 62.30	\$ 62.30	0,660	0.66	\$ 50.00	\$ 33.00	\$ 33.00	\$ 95.30
259		Power Supply -BPS-24-1 (24VDC @ 1 Amps), (Provide Necessary Relays) -Securiton	EA	1	0%	1	\$ 89.99	\$ 89.99	1,000	1.00	\$ 50.00	\$ 50.00	\$ 50.00	\$ 139.99
260		Diagrams -Diagrams - Elevation and Riser -By MFR	EA	1	0%	1	\$ 122.00	\$ 122.00	1,120	1.12	\$ 50.00	\$ 56.00	\$ 56.00	\$ 178.00
261		Diagrams -Diagrams - Point To Point -By MFR	EA	1	0%	1	\$ 122.00	\$ 122.00	1,120	1.12	\$ 50.00	\$ 56.00	\$ 56.00	\$ 178.00
		Hardware Set 004	EA	1										
262		Hinge, Continuous Geared -CFM 83 SLF HD1 LHR -Penko	EA	1	0%	1	\$ 144.60	\$ 144.60	1,120	1.12	\$ 50.00	\$ 56.00	\$ 56.00	\$ 200.60
263		Exit Device, Rim -PED5201 LHR 630 W036 -Corbin-Russwin	EA	1	0%	1	\$ 1,855.00	\$ 1,855.00	2,100	2.10	\$ 50.00	\$ 105.00	\$ 105.00	\$ 1,960.00
264		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1,200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
265		Perimeter Gasket Bracket -BKT050G -Penko	EA	1	0%	1	\$ 23.24	\$ 23.24	0,400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 43.24
266		Kick Plate -K1050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0,450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37
267		Weatherstrip -290AS (Jamb Gasket 2ea. per opg.) 84" -Penko	EA	2	0%	2	\$ 61.57	\$ 123.14	0,400	0.80	\$ 50.00	\$ 20.00	\$ 40.00	\$ 163.14
268		Door Bottom Sweep -31SCN 36" -Penko	EA	1	0%	1	\$ 55.00	\$ 55.00	0,520	0.52	\$ 50.00	\$ 26.00	\$ 26.00	\$ 81.00
269		Overhead Rain Drip -346C 40" -Penko	EA	1	0%	1	\$ 72.00	\$ 72.00	0,750	0.75	\$ 50.00	\$ 37.50	\$ 37.50	\$ 109.50
270		Threshold -195A 192A 196A (Supp) 195A (Frame Depth + 1/2") All Welded -Penko	EA	1	0%	1	\$ 62.30	\$ 62.30	0,660	0.66	\$ 50.00	\$ 33.00	\$ 33.00	\$ 95.30
		Hardware Set 005	EA	1										

COST ESTIMATE BREAKDOWN

PROJECT ID:					TOTAL MATERIAL COST									
ADDRESS:					TOTAL LABOR COST									\$ 1,226,736.19
SCOPE: GC					TOTAL TRADES COST									\$ 764,494.82
DATE: 12-Aug-24					SALES TAX					7.75%				\$ 95,072.05
GROSS AREA: 10784					OVERHEAD & PROFIT					15.00%				\$ 298,684.65
PREPARED BY:					INSURANCE & BONDING					3.00%				\$ 59,736.93
					BID AMOUNT									\$ 2,444,724.65
					TOTAL LABOR HOURS									

LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL UNIT COST	TOTAL COST	LABOR UNIT LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
271		Hinge, Continuous Geared -CFM R3 SLF HD1 LHR -Penko	EA	1	0%	1	\$ 144.60	\$ 144.60	1.120	1.12	\$ 50.00	\$ 56.00	\$ 56.00	\$ 200.60
272		Exit Device, Rim -PED5201 LHR 630 W036 -Corbin-Russwin	EA	1	0%	1	\$ 1,855.00	\$ 1,855.00	2.100	2.10	\$ 50.00	\$ 105.00	\$ 105.00	\$ 1,960.00
273		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1.200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
274		Perimeter Gasket Bracket -BKTO50G -Penko	EA	1	0%	1	\$ 23.24	\$ 23.24	0.400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 43.24
275		Kick Plate -KI050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0.450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37
276		Weatherstrip -290AS (Jamb Gasket 2ea. per opp.) 84" -Penko	EA	2	0%	2	\$ 61.57	\$ 123.14	0.400	0.80	\$ 50.00	\$ 20.00	\$ 40.00	\$ 163.14
277		Door Bottom Sweep -31SCN 36" -Penko	EA	1	0%	1	\$ 55.00	\$ 55.00	0.520	0.52	\$ 50.00	\$ 26.00	\$ 26.00	\$ 81.00
278		Overhead Rain Drip -346C 40" -Penko	EA	1	0%	1	\$ 72.00	\$ 72.00	0.750	0.75	\$ 50.00	\$ 37.50	\$ 37.50	\$ 109.50
279		Threshold -195A 192A 196A (Supp) 195A (Frame Depth + 1/2") All Welded -Penko	EA	1	0%	1	\$ 62.30	\$ 62.30	0.660	0.66	\$ 50.00	\$ 33.00	\$ 33.00	\$ 95.30
		Hardware Set 006	EA	2										
280		Hinge, Continuous Geared -CFM R3 SLF HD1 LHR -Penko	EA	2	0%	2	\$ 144.60	\$ 289.20	1.120	2.24	\$ 50.00	\$ 56.00	\$ 112.00	\$ 401.20
281		Exit Device, Rim -PED5249 N94PT 626 RHR 630 W036 -Corbin-Russwin	EA	2	0%	2	\$ 1,855.00	\$ 3,710.00	2.100	4.20	\$ 50.00	\$ 105.00	\$ 210.00	\$ 3,920.00
282		Cylinder -Cylinder - 626 { Verify Type Required } -Section 087100	EA	2	0%	2	\$ 221.00	\$ 442.00	1.580	3.16	\$ 50.00	\$ 79.00	\$ 158.00	\$ 600.00
283		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. -Norton	EA	2	0%	2	\$ 277.37	\$ 554.74	1.200	2.40	\$ 50.00	\$ 60.00	\$ 120.00	\$ 674.74
284		Perimeter Gasket Bracket -BKTO50G -Penko	EA	2	0%	2	\$ 23.24	\$ 46.48	0.400	0.80	\$ 50.00	\$ 20.00	\$ 40.00	\$ 86.48
285		Kick Plate -KI050 08" x 34" 18 ga. US32D -Rockwood	EA	2	0%	2	\$ 24.87	\$ 49.74	0.450	0.90	\$ 50.00	\$ 22.50	\$ 45.00	\$ 94.74
286		Weatherstrip -290AS (Jamb Gasket 2ea. per opp.) 84" -Penko	EA	4	0%	4	\$ 61.57	\$ 246.28	0.400	1.60	\$ 50.00	\$ 20.00	\$ 80.00	\$ 326.28
287		Door Bottom Sweep -31SCN 36" -Penko	EA	2	0%	2	\$ 55.00	\$ 110.00	0.520	1.04	\$ 50.00	\$ 26.00	\$ 52.00	\$ 162.00
288		Overhead Rain Drip -346C 40" -Penko	EA	2	0%	2	\$ 72.00	\$ 144.00	0.750	1.50	\$ 50.00	\$ 37.50	\$ 75.00	\$ 219.00
289		Threshold -195A 192A 196A (Supp) 195A (Frame Depth + 1/2") All Welded -Penko	EA	2	0%	2	\$ 62.30	\$ 124.60	0.660	1.32	\$ 50.00	\$ 33.00	\$ 66.00	\$ 190.60
		Hardware Set 007	EA	1										
290		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D NRP -McKinney	EA	3	0%	3	\$ 144.60	\$ 433.80	1.120	3.36	\$ 50.00	\$ 56.00	\$ 168.00	\$ 601.80
291		Latchset, Passage -CLX3310 NZD 626 M17 -Corbin-Russwin	EA	1	0%	1	\$ 396.00	\$ 396.00	1.951	1.95	\$ 50.00	\$ 97.55	\$ 97.55	\$ 493.55
292		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1.200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
293		Perimeter Gasket Bracket -BKTO50G -Penko	EA	1	0%	1	\$ 61.57	\$ 61.57	0.400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 81.57
294		Kick Plate -KI050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0.450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37
295		Weatherstrip -289IAS (Head Gasket 1 ea. per opp.) 32" -Penko	EA	1	0%	1	\$ 61.57	\$ 61.57	0.400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 81.57
296		Weatherstrip -290AS (Jamb Gasket 2ea. per opp.) 84" -Penko	EA	1	0%	1	\$ 61.57	\$ 61.57	0.400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 81.57
297		Door Bottom Sweep -31SCN 36" -Penko	EA	1	0%	1	\$ 55.00	\$ 55.00	0.520	0.52	\$ 50.00	\$ 26.00	\$ 26.00	\$ 81.00
298		Threshold -195A 192A 196A (Supp) 195A (Frame Depth + 1/2") All Welded -Penko	EA	1	0%	1	\$ 62.30	\$ 62.30	0.660	0.66	\$ 50.00	\$ 33.00	\$ 33.00	\$ 95.30
		Hardware Set 008	EA	1										
299		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D -McKinney	EA	3	0%	3	\$ 144.60	\$ 433.80	1.120	3.36	\$ 50.00	\$ 56.00	\$ 168.00	\$ 601.80
300		Latchset, Passage -CLX3310 NZD 626 M17 -Corbin-Russwin	EA	1	0%	1	\$ 396.00	\$ 396.00	1.951	1.95	\$ 50.00	\$ 97.55	\$ 97.55	\$ 493.55
301		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. Install "PUSH" Side -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1.200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
302		Perimeter Gasket Bracket -BKTO50G -Penko	EA	1	0%	1	\$ 23.24	\$ 23.24	0.400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 43.24
303		Kick Plate -KI050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0.450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37
304		Weatherstrip -289IAS (Head Gasket 1 ea. per opp.) 32" -Penko	EA	1	0%	1	\$ 61.57	\$ 61.57	0.400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 81.57
305		Weatherstrip -290AS (Jamb Gasket 2ea. per opp.) 84" -Penko	EA	1	0%	1	\$ 61.57	\$ 61.57	0.400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 81.57
306		Door Bottom Sweep -31SCN 36" -Penko	EA	1	0%	1	\$ 55.00	\$ 55.00	0.520	0.52	\$ 50.00	\$ 26.00	\$ 26.00	\$ 81.00
307		Threshold -195A 192A 196A (Supp) 195A (Frame Depth + 1/2") All Welded -Penko	EA	1	0%	1	\$ 62.30	\$ 62.30	0.660	0.66	\$ 50.00	\$ 33.00	\$ 33.00	\$ 95.30
		Hardware Set 009	EA	2										
308		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D NRP -McKinney	EA	6	0%	6	\$ 144.60	\$ 867.60	1.120	6.72	\$ 50.00	\$ 56.00	\$ 336.00	\$ 1,203.60

COST ESTIMATE BREAKDOWN

PROJECT ID:						TOTAL MATERIAL COST				\$ 1,226,736.19			
ADDRESS:						TOTAL LABOR COST				\$ 764,494.82			
SCOPE: GC						TOTAL TRADES COST				\$ 1,991,231.01			
DATE: 12-Aug-24						SALES TAX				7.75% \$ 95,072.05			
GROSS AREA: 10784						OVERHEAD & PROFIT				15.00% \$ 298,684.65			
PREPARED BY:						INSURANCE & BONDING				3.00% \$ 59,736.93			
						BID AMOUNT				\$ 2,444,724.65			
						TOTAL LABOR HOURS							

LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL UNIT COST	TOTAL COST	LABOR UNIT LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
309		Lockset, Classroom -CLX3355 NZD 626 M17 -Corbin-Ruswin	EA	2	0%	2	\$ 531.00	\$ 1,062.00	1.950	3.90	\$ 50.00	\$ 97.50	\$ 195.00	\$ 1,257.00
310		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. -Norton	EA	2	0%	2	\$ 277.37	\$ 554.74	1.200	2.40	\$ 50.00	\$ 60.00	\$ 120.00	\$ 674.74
311		Kick Plate -KI1050 08" x 34" 18 ga. US32D -Rockwood	EA	2	0%	2	\$ 24.87	\$ 49.74	0.450	0.90	\$ 50.00	\$ 22.50	\$ 45.00	\$ 94.74
312		Silencer, HM Dr. Frame -608 Gray -Rockwood	EA	6	0%	6	\$ 29.35	\$ 176.10	0.250	1.50	\$ 50.00	\$ 12.50	\$ 75.00	\$ 251.10
		Hardware Set 011	EA	1										
313		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D -McKinney	EA	3	0%	3	\$ 144.60	\$ 433.80	1.120	3.36	\$ 50.00	\$ 56.00	\$ 168.00	\$ 601.80
314		Lockset, Classroom -CLX3355 NZD 626 M17 -Corbin-Ruswin	EA	1	0%	1	\$ 531.00	\$ 531.00	1.950	1.95	\$ 50.00	\$ 97.50	\$ 97.50	\$ 628.50
315		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. Install "PUSH" Side -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1.200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
316		Kick Plate -KI1050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0.450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37
317		Silencer, HM Dr. Frame -608 Gray -Rockwood	EA	3	0%	3	\$ 29.35	\$ 88.05	0.250	0.75	\$ 50.00	\$ 12.50	\$ 37.50	\$ 125.55
		Hardware Set 012	EA	2										
318		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D -McKinney	EA	6	0%	6	\$ 144.60	\$ 867.60	1.120	6.72	\$ 50.00	\$ 56.00	\$ 336.00	\$ 1,203.60
319		Lockset, Storeroom/Closet -CLX3357 NZD 626 M17 M21 -Corbin-Ruswin	EA	2	0%	2	\$ 531.00	\$ 1,062.00	1.950	3.90	\$ 50.00	\$ 97.50	\$ 195.00	\$ 1,257.00
320		Kick Plate -KI1050 08" x 34" 18 ga. US32D -Rockwood	EA	2	0%	2	\$ 24.87	\$ 49.74	0.450	0.90	\$ 50.00	\$ 22.50	\$ 45.00	\$ 94.74
321		Stop, Hinge -1513 - 619 -Don-Jo	EA	2	0%	2	\$ 144.60	\$ 289.20	1.120	2.24	\$ 50.00	\$ 56.00	\$ 112.00	\$ 401.20
322		Silencer, HM Dr. Frame -608 Gray -Rockwood	EA	6	0%	6	\$ 29.35	\$ 176.10	0.250	1.50	\$ 50.00	\$ 12.50	\$ 75.00	\$ 251.10
		Hardware Set 201	EA	3										
323		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D -McKinney	EA	3	0%	3	\$ 144.60	\$ 433.80	1.120	3.36	\$ 50.00	\$ 56.00	\$ 168.00	\$ 601.80
324		Lockset, Classroom -CLX3355 NZD 626 M17 -Corbin-Ruswin	EA	1	0%	1	\$ 531.00	\$ 531.00	1.950	1.95	\$ 50.00	\$ 97.50	\$ 97.50	\$ 628.50
325		Closer, Par Arm - HO -PR7500 H (RH) 689 @ 100 Deg. -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1.200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
326		Armer Plate -KI1050 34" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0.450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37
327		Silencer, HM Dr. Frame -608 Gray -Rockwood	EA	3	0%	3	\$ 29.35	\$ 88.05	0.250	0.75	\$ 50.00	\$ 12.50	\$ 37.50	\$ 125.55
		Hardware Set 203	EA	1										
328		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D NRP -McKinney	EA	3	0%	3	\$ 144.60	\$ 433.80	1.120	3.36	\$ 50.00	\$ 56.00	\$ 168.00	\$ 601.80
329		Lockset, Storeroom/Closet -CLX3357 NZD 626 M17 -Corbin-Ruswin	EA	1	0%	1	\$ 531.00	\$ 531.00	1.950	1.95	\$ 50.00	\$ 97.50	\$ 97.50	\$ 628.50
330		Closer, Par Arm - Cush/Stop/HO -CPS-7500 T 689 @ 90 Deg. -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1.200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
331		Kick Plate -KI1050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0.450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37
332		Silencer, HM Dr. Frame -608 Gray -Rockwood	EA	3	0%	3	\$ 29.35	\$ 88.05	0.250	0.75	\$ 50.00	\$ 12.50	\$ 37.50	\$ 125.55
		Hardware Set 204	EA	1										
333		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D -McKinney	EA	3	0%	3	\$ 144.60	\$ 433.80	1.120	3.36	\$ 50.00	\$ 56.00	\$ 168.00	\$ 601.80
334		Lockset, Storeroom/Closet -CLX3357 NZD 626 M17 -Corbin-Ruswin	EA	1	0%	1	\$ 531.00	\$ 531.00	1.950	1.95	\$ 50.00	\$ 97.50	\$ 97.50	\$ 628.50
335		Stop, Wall -409 US26D -Rockwood	EA	1	0%	1	\$ 37.98	\$ 37.98	0.400	0.40	\$ 50.00	\$ 20.00	\$ 20.00	\$ 57.98
336		Silencer, HM Dr. Frame -608 Gray -Rockwood	EA	1	0%	1	\$ 29.35	\$ 29.35	0.250	0.25	\$ 50.00	\$ 12.50	\$ 12.50	\$ 41.85
		Hardware Set 207	EA	1										
337		Hinge, Ball Bearing -TAN29-P33.5 x 4.5 US26D NRP -McKinney	EA	3	0%	3	\$ 144.60	\$ 433.80	1.120	3.36	\$ 50.00	\$ 56.00	\$ 168.00	\$ 601.80
338		Lockset, Storeroom/Closet -CLX3357 NZD 626 M17 -Corbin-Ruswin	EA	1	0%	1	\$ 531.00	\$ 531.00	1.950	1.95	\$ 50.00	\$ 97.50	\$ 97.50	\$ 628.50
339		Closer, Par Arm - HO -PR7500 H (RH) 689 @ 110 Deg. -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1.200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
340		Kick Plate -KI1050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0.450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37
341		Silencer, HM Dr. Frame -608 Gray -Rockwood	EA	3	0%	3	\$ 29.35	\$ 88.05	0.250	0.75	\$ 50.00	\$ 12.50	\$ 37.50	\$ 125.55
		Hardware Set 208	EA	1										
342		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D NRP -McKinney	EA	3	0%	3	\$ 144.60	\$ 433.80	1.120	3.36	\$ 50.00	\$ 56.00	\$ 168.00	\$ 601.80
343		Lockset, Storeroom/Closet -CLX3357 NZD 626 M17 -Corbin-Ruswin	EA	1	0%	1	\$ 531.00	\$ 531.00	1.950	1.95	\$ 50.00	\$ 97.50	\$ 97.50	\$ 628.50
344		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. -Norton	EA	1	0%	1	\$ 277.37	\$ 277.37	1.200	1.20	\$ 50.00	\$ 60.00	\$ 60.00	\$ 337.37
345		Kick Plate -KI1050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$ 24.87	\$ 24.87	0.450	0.45	\$ 50.00	\$ 22.50	\$ 22.50	\$ 47.37

COST ESTIMATE BREAKDOWN

PROJECT ID:					TOTAL MATERIAL COST					\$ 1,226,736.19				
ADDRESS:					TOTAL LABOR COST					\$ 764,494.82				
SCOPE: GC					TOTAL TRADES COST					\$ 1,991,231.01				
DATE: 12-Aug-24					SALES TAX					7.75% \$ 95,072.05				
GROSS AREA: 10784					OVERHEAD & PROFIT					15.00% \$ 298,684.65				
PREPARED BY:					INSURANCE & BONDING					3.00% \$ 59,736.93				
					BID AMOUNT					\$ 2,444,724.65				
					TOTAL LABOR HOURS									

LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL	UNIT COST	TOTAL COST	LABOR	UNIT LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
346		Silencer, HM Dr. Frame -608 Gray -Rockwood	EA	3	0%	3	\$	29.35	\$ 88.05	0.250	0.75	\$	50.00	\$ 12.50	\$ 37.50	\$ 125.55
		Hardware Set 503	EA	1												
347		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D NRP -McKinney	EA	3	0%	3	\$	144.60	\$ 433.80	1.120	3.36	\$	50.00	\$ 56.00	\$ 168.00	\$ 601.80
348		Lockset, Storeroom/Closet -CLX3357 NZD 626 M17 -Corbin-Ruswin	EA	1	0%	1	\$	531.00	\$ 531.00	1.950	1.95	\$	50.00	\$ 97.50	\$ 97.50	\$ 628.50
349		Closer, Par Arm - Cush/Stop -CPS-7500 689 @ 90 Deg. -McKinney	EA	1	0%	1	\$	277.37	\$ 277.37	1.200	1.20	\$	50.00	\$ 60.00	\$ 60.00	\$ 337.37
350		Kick Plate -KI1050 08" x 34" 18 ga. US32D -Rockwood	EA	1	0%	1	\$	24.87	\$ 24.87	0.450	0.45	\$	50.00	\$ 22.50	\$ 22.50	\$ 47.37
351		Silencer, HM Dr. Frame -608 Gray -Rockwood	EA	3	0%	3	\$	29.35	\$ 88.05	0.250	0.75	\$	50.00	\$ 12.50	\$ 37.50	\$ 125.55
		Hardware Set 602	EA	1												
352		Hinge, Ball Bearing -TA2714 4.5 x 4.5 US26D -McKinney	EA	3	0%	3	\$	144.60	\$ 433.80	1.120	3.36	\$	50.00	\$ 56.00	\$ 168.00	\$ 601.80
353		Lockset, Classroom -CLX3355 NZD 626 M17 -Corbin-Ruswin	EA	1	0%	1	\$	531.00	\$ 531.00	1.950	1.95	\$	50.00	\$ 97.50	\$ 97.50	\$ 628.50
354		Shoe Wall -409 US26D -Rockwood	EA	1	0%	1	\$	37.98	\$ 37.98	0.400	0.40	\$	50.00	\$ 20.00	\$ 20.00	\$ 57.98
355		Weatherstrip -2891AS (Head Gasket 1 ea. per opp.) 36" -Penko	EA	1	0%	1	\$	61.57	\$ 61.57	0.400	0.40	\$	50.00	\$ 20.00	\$ 20.00	\$ 81.57
356		Weatherstrip -290AS (Jamb Gasket 2ea. per opp.) 84" -Penko	EA	1	0%	1	\$	61.57	\$ 61.57	0.400	0.40	\$	50.00	\$ 20.00	\$ 20.00	\$ 81.57
		WINDOWS														
357		6'-0" x 4'-0" Window	EA	3	0%	3	\$	864.00	\$ 2,592.00	3.100	9.30	\$	50.00	\$ 155.00	\$ 465.00	\$ 3,057.00
358		3'-0" x 4'-0" Window	EA	6	0%	6	\$	432.00	\$ 2,592.00	2.450	14.70	\$	50.00	\$ 122.50	\$ 735.00	\$ 3,327.00
359		4'-0" x 4'-0" Window	EA	2	0%	2	\$	576.00	\$ 1,152.00	2.690	5.38	\$	50.00	\$ 134.50	\$ 269.00	\$ 1,421.00
360		5'-4" x 4'-8" Window	EA	7	0%	7	\$	896.04	\$ 6,272.28	3.210	22.47	\$	50.00	\$ 160.50	\$ 1,123.50	\$ 7,395.78
		LOUVERS														
361		1'-0" x 0'-8" Louvers	EA	1	0%	1	\$	165.00	\$ 165.00	1.100	1.10	\$	50.00	\$ 55.00	\$ 55.00	\$ 220.00
362		0'-8" x 0'-6" Louvers	EA	1	0%	1	\$	133.00	\$ 133.00	0.950	0.95	\$	50.00	\$ 47.50	\$ 47.50	\$ 180.50
363		4'-0" x 3'-8" Louvers	EA	1	0%	1	\$	562.02	\$ 562.02	2.680	2.68	\$	50.00	\$ 134.00	\$ 134.00	\$ 696.02
		TRIMS														
364		Door Trim	LF	1385	10%	1524	\$	3.53	\$ 5,378.12	0.032	48.75	\$	50.00	\$ 1.60	\$ 2,437.67	\$ 7,815.79
365		Window Trim	SF	632	10%	695	\$	4.10	\$ 2,849.94	0.032	22.24	\$	50.00	\$ 1.60	\$ 1,112.17	\$ 3,962.11

	DIV. 9	FINISHES					SUBTOTAL	\$ 157,458.76	22.132					\$ 138,447.50	\$ 295,906.26
		DRYWALL ASSEMBLIES													
		EX-3: 1-5/8" Metal Stud Furring Wall	LF	19	10										
366		1 Layer 5/8" Gypsum Board On One Side	SF	190	10%	209									
367		Gypsum Board Sheet (4'-0"x8'-0")	EA	7	10%	7	\$	18.25	\$ 131.11	0.320	2.30	\$	45.00	\$ 14.40	\$ 103.46 \$ 234.57
368		Tapping	LF	95	10%	105	\$	0.12	\$ 12.54	0.010	1.05	\$	45.00	\$ 0.45	\$ 47.03 \$ 59.57
369		Mudding	LBS	10	10%	11	\$	1.53	\$ 16.95	0.128	1.42	\$	45.00	\$ 5.76	\$ 63.80 \$ 80.75
370		Screw	EA	314	0%	314	\$	0.05	\$ 15.68	0.000	0.00	\$	-	\$ -	\$ 15.68
371		1-5/8" Metal Stud @ 16" O.C.	LF	143	10%	157	\$	0.98	\$ 154.00	0.010	1.57	\$	45.00	\$ 0.45	\$ 70.71 \$ 224.71
372		1-5/8" Bottom Runner	LF	19	10%	21	\$	0.98	\$ 20.48	0.010	0.21	\$	45.00	\$ 0.45	\$ 9.41 \$ 29.89
373		1-5/8" Top Runner	LF	19	10%	21	\$	0.98	\$ 20.48	0.010	0.21	\$	45.00	\$ 0.45	\$ 9.41 \$ 29.89
374		Sealant	LF	38	10%	42	\$	0.40	\$ 16.72	0.010	0.42	\$	45.00	\$ 0.45	\$ 18.81 \$ 35.53
		FBG-1: 3-5/8" Metal Stud Furring Wall	LF	18	10										
375		1 Layer 5/8" Gypsum Board On One Side	SF	180	10%	198									
376		Gypsum Board Sheet (4'-0"x8'-0")	EA	6	10%	7	\$	18.25	\$ 124.21	0.320	2.18	\$	45.00	\$ 14.40	\$ 98.01 \$ 222.22
377		Tapping	LF	90	10%	99	\$	0.12	\$ 11.88	0.010	0.99	\$	45.00	\$ 0.45	\$ 44.55 \$ 56.43
378		Mudding	LBS	10	10%	10	\$	1.53	\$ 16.06	0.128	1.34	\$	45.00	\$ 5.76	\$ 60.45 \$ 76.50
379		Screw	EA	297	0%	297	\$	0.05	\$ 14.85	0.000	0.00	\$	-	\$ -	\$ - \$ 14.85
380		3-5/8" Metal Stud @ 16" O.C.	LF	135	10%	149	\$	1.45	\$ 215.86	0.016	2.38	\$	45.00	\$ 0.72	\$ 107.19 \$ 323.05
381		3-5/8" Bottom Runner	LF	18	10%	20	\$	1.45	\$ 28.71	0.016	0.32	\$	45.00	\$ 0.72	\$ 14.26 \$ 42.97
382		3-5/8" Top Runner	LF	18	10%	20	\$	1.45	\$ 28.71	0.016	0.32	\$	45.00	\$ 0.72	\$ 14.26 \$ 42.97
383		Sealant	LF	36	10%	40	\$	0.40	\$ 15.84	0.010	0.40	\$	45.00	\$ 0.45	\$ 17.82 \$ 33.66
		FGA-2: 3-5/8" Metal Stud Wall	LF	16	10										
384		3 Layer Of 5/8" Fire Code Gypsum Board On Each Side	SF	480	10%	528									
385		Gypsum Board Sheet (4'-0"x8'-0")	EA	17	10%	18	\$	22.50	\$ 408.38	0.320	5.81	\$	45.00	\$ 14.40	\$ 261.36 \$ 669.74
386		Tapping	LF	240	10%	264	\$	0.12	\$ 31.68	0.010	2.64	\$	45.00	\$ 0.45	\$ 118.80 \$ 150.48
387		Mudding	LBS	25	10%	28	\$	1.53	\$ 42.82	0.128	3.58	\$	45.00	\$ 5.76	\$ 161.19 \$ 204.00
388		Screw	EA	792	0%	792	\$	0.05	\$ 39.60	0.000	0.00	\$	-	\$ -	\$ - \$ 39.60
389		1 Layer Of 5/8" Cement Board On One Side	SF	160	10%	176									
390		Gypsum Board Sheet (4'-0"x8'-0")	EA	6	10%	6	\$	31.00	\$ 187.55	0.360	2.18	\$	45.00	\$ 16.20	\$ 98.01 \$ 285.56
391		Tapping	LF	80	10%	88	\$	0.12	\$ 10.56	0.010	0.88	\$	45.00	\$ 0.45	\$ 39.60 \$ 50.16
392		Mudding	LBS	8	10%	9	\$	1.53	\$ 14.27	0.128	1.19	\$	45.00	\$ 5.76	\$ 53.73 \$ 68.00
393		Screw	EA	264	0%	264	\$	0.05	\$ 13.20	0.000	0.00	\$	-	\$ -	\$ - \$ 13.20
394		3-1/2" Acoustic Batt Insulation	SF	160	10%	176	\$	1.32	\$ 232.32	0.012	2.11	\$	45.00	\$ 0.54	\$ 95.04 \$ 327.36
395		3-5/8" Metal Stud @ 16" O.C.	LF	120	10%	132	\$	1.45	\$ 191.88	0.016	2.12	\$	45.00	\$ 0.72	\$ 95.28 \$ 287.16
396		3-5/8" Bottom Runner	LF	16	10%	18	\$	1.45	\$ 25.52	0.016	0.28	\$	45.00	\$ 0.72	\$ 12.67 \$ 38.19
397		3-5/8" Top Runner	LF	16	10%	18	\$	1.45	\$ 25.52	0.016	0.28	\$	45.00	\$ 0.72	\$ 12.67 \$ 38.19
398		Sealant	LF	64	10%	70	\$	0.40	\$ 28.16	0.010	0.70	\$	45.00	\$ 0.45	\$ 31.68 \$ 59.84
		FGA-2: 3-5/8" Metal Stud Wall	LF	9	10										
399		3 Layer Of 5/8" Fire Code Gypsum Board On Each Side	SF	270	10%	297									
400		Gypsum Board Sheet (4'-0"x8'-0")	EA	9	10%	10	\$	22.50	\$ 229.71	0.320	3.27	\$	45.00	\$ 14.40	\$ 147.02 \$ 376.73
401		Tapping	LF	135	10%	149	\$	0.12	\$ 17.82	0.010	1.49	\$	45.00	\$ 0.45	\$ 66.83 \$ 84.65
402		Mudding	LBS	14	10%	16	\$	1.53	\$ 24.08	0.128	2.01	\$	45.00	\$ 5.76	\$ 90.67 \$ 114.75
403		Screw	EA	446	0%	446	\$	0.05	\$ 22.28	0.000	0.00	\$	-	\$ -	\$ - \$ 22.28
404		1 Layer Of 5/8" Moisture Resistant Board On One Side	SF	90	10%	99									
405		Gypsum Board Sheet (4'-0"x8'-0")	EA	3	10%	3	\$	20.86	\$ 70.99	0.320	1.09	\$	45.00	\$ 14.40	\$ 49.01 \$ 119.99
406		Tapping	LF	45	10%	50	\$	0.12	\$ 5.94	0.010	0.50	\$	45.00	\$ 0.45	\$ 22.28 \$ 28.22
407		Mudding	LBS	5	10%	5	\$	1.53	\$ 8.03	0.128	0.67	\$	45.00	\$ 5.76	\$ 30.22 \$ 38.25
408		Screw	EA	149	0%	149	\$	0.05	\$ 7.43	0.000	0.00	\$	-	\$ -	\$ - \$ 7.43
409		3-1/2" Acoustic Batt Insulation	SF	90	10%	99	\$	1.32	\$ 130.68	0.012	1.19	\$	45.00	\$ 0.54	\$ 53.46 \$ 184.14
410		3-5/8" Metal Stud @ 16" O.C.	LF	68	10%	74	\$	1.45	\$ 107.93	0.016	1.19	\$	45.00	\$ 0.72	\$ 53.59 \$ 161.53
411		3-5/8" Bottom Runner	LF	9	10%	10	\$	1.45	\$ 14.36	0.016	0.16	\$	45.00	\$ 0.72	\$ 7.13 \$ 21.48
412		3-5/8" Top Runner	LF	9	10%	10	\$	1.45	\$ 14.36	0.016	0.16	\$	45.00	\$ 0.72	\$ 7.13 \$ 21.48
413		Sealant	LF	36	10%	40	\$	0.40	\$ 15.84	0.010	0.40	\$	45.00	\$ 0.45	\$ 17.82 \$ 33.66
		FGA-2: 3-5/8" Metal Stud Wall	LF	9	10										
414		4 Layer Of 5/8" Fire Code Gypsum Board On Each Side	SF	360	10%	396									
415		Gypsum Board Sheet (4'-0"x8'-0")	EA	12	10%	14	\$	22.50	\$ 306.28	0.320	4.36	\$	45.00	\$ 14.40	\$ 196.02 \$ 502.30
416		Tapping	LF	180	10%	198	\$	0.12	\$ 23.76	0.010	1.98	\$	45.00	\$ 0.45	\$ 89.10 \$ 112.86
417		Mudding	LBS	19	10%	21	\$	1.53	\$ 32.11	0.128	2.69	\$	45.00	\$ 5.76	\$ 120.89 \$ 153.00
418		Screw	EA	594	0%	594	\$	0.05	\$ 29.70	0.000	0.00	\$	-	\$ -	\$ - \$ 29.70
419		3-1/2" Acoustic Batt Insulation	SF	90	10%	99	\$	1.32	\$ 130.68	0.012	1.19	\$	45.00	\$ 0.54	\$ 53.46 \$ 184.14
420		3-5/8" Metal Stud @ 16" O.C.	LF	68	10%	74	\$	1.45	\$ 107.93	0.016	1.19	\$	45.00	\$ 0.72	\$ 53.59 \$ 161.53
421		3-5/8" Bottom Runner	LF	9	10%	10	\$	1.45	\$ 14.36	0.016	0.16	\$	45.00	\$ 0.72	\$ 7.13 \$ 21.48
422		3-5/8" Top Runner	LF	9	10%	10	\$	1.45	\$ 14.36	0.016	0.16	\$	45.00	\$ 0.72	\$ 7.13 \$ 21.48
423		Sealant	LF	36	10%	40	\$	0.40	\$ 15.84	0.010	0.40	\$	45.00	\$ 0.45	\$ 17.82 \$ 33.66
		G-1: 3-5/8" Metal Stud Wall	LF	39	10										

COST ESTIMATE BREAKDOWN

PROJECT ID: ADDRESS: SCOPE: GC DATE: 12-Aug-24 GROSS AREA: 10784 PREPARED BY:							TOTAL MATERIAL COST TOTAL LABOR COST TOTAL TRADES COST SALES TAX OVERHEAD & PROFIT INSURANCE & BONDING BID AMOUNT TOTAL LABOR HOURS										\$ 1,226,736.19 \$ 764,494.82 \$ 1,991,231.01 7.75% 15.00% 3.00% \$ 2,444,724.65
LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL UNIT COST	TOTAL COST	LABOR UNIT LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST			
424		1 Layer Of 5/8" Gypsum Board On Each Side	SF	702	10%	772											
425		Gypsum Board Sheet (4'-0"x8'-0")	EA	24	10%	27	\$ 18.25	\$ 484.43	0.320	8.49	\$ 45.00	\$ 14.40	\$ 382.24	\$ 866.67			
426		Tapping	LF	351	10%	386	\$ 0.12	\$ 46.33	0.010	3.86	\$ 45.00	\$ 0.45	\$ 173.75	\$ 220.08			
427		Mudding	LBS	37	10%	41	\$ 1.53	\$ 62.62	0.128	5.24	\$ 45.00	\$ 5.76	\$ 235.74	\$ 298.35			
428		Screw	EA	1158	0%	1158	\$ 0.05	\$ 57.92	0.000	0.00	\$ -	\$ -	\$ -	\$ 57.92			
429		3-5/8" Metal Stud @ 16" O.C	LF	293	10%	323	\$ 1.45	\$ 467.71	0.016	5.16	\$ 45.00	\$ 0.72	\$ 232.24	\$ 699.95			
430		3-5/8" Bottom Runner	LF	39	10%	43	\$ 1.45	\$ 62.21	0.016	0.69	\$ 45.00	\$ 0.72	\$ 30.89	\$ 93.09			
431		3-5/8" Top Runner	LF	39	10%	43	\$ 1.45	\$ 62.21	0.016	0.69	\$ 45.00	\$ 0.72	\$ 30.89	\$ 93.09			
432		Sealant	LF	156	10%	172	\$ 0.40	\$ 68.64	0.010	1.72	\$ 45.00	\$ 0.45	\$ 77.22	\$ 145.86			
G-2: 6" Metal Stud Wall							1F	11	10								
433		1 Layer Of 5/8" Cement Board On Each Side	SF	198	10%	218											
434		Gypsum Board Sheet (4'-0"x8'-0")	EA	7	10%	8	\$ 31.00	\$ 232.09	0.360	2.70	\$ 45.00	\$ 16.20	\$ 121.29	\$ 353.38			
435		Tapping	LF	99	10%	109	\$ 0.12	\$ 13.07	0.010	1.09	\$ 45.00	\$ 0.45	\$ 49.01	\$ 62.07			
436		Mudding	LBS	10	10%	12	\$ 1.53	\$ 17.66	0.128	1.48	\$ 45.00	\$ 5.76	\$ 66.49	\$ 84.15			
437		Screw	EA	327	0%	327	\$ 0.05	\$ 16.34	0.000	0.00	\$ -	\$ -	\$ -	\$ 16.34			
438		6" Metal Stud @ 16" O.C	LF	83	10%	91	\$ 1.70	\$ 154.66	0.018	1.64	\$ 45.00	\$ 0.81	\$ 73.69	\$ 228.35			
439		6" Bottom Runner	LF	11	10%	12	\$ 1.70	\$ 20.57	0.018	0.22	\$ 45.00	\$ 0.81	\$ 9.80	\$ 30.37			
440		6" Top Runner	LF	11	10%	12	\$ 1.70	\$ 20.57	0.018	0.22	\$ 45.00	\$ 0.81	\$ 9.80	\$ 30.37			
441		Sealant	LF	44	10%	48	\$ 0.40	\$ 19.36	0.010	0.48	\$ 45.00	\$ 0.45	\$ 21.78	\$ 41.14			
G-2: 6" Metal Stud Wall							1F	15	10								
442		1 Layer Of 5/8" Gypsum Board On Each Side	SF	270	10%	297											
443		Gypsum Board Sheet (4'-0"x8'-0")	EA	9	10%	10	\$ 18.25	\$ 186.32	0.320	3.27	\$ 45.00	\$ 14.40	\$ 147.02	\$ 333.34			
444		Tapping	LF	135	10%	149	\$ 0.12	\$ 17.82	0.010	1.49	\$ 45.00	\$ 0.45	\$ 66.83	\$ 84.65			
445		Mudding	LBS	14	10%	16	\$ 1.53	\$ 24.08	0.128	2.01	\$ 45.00	\$ 5.76	\$ 90.67	\$ 114.75			
446		Screw	EA	446	0%	446	\$ 0.05	\$ 22.28	0.000	0.00	\$ -	\$ -	\$ -	\$ 22.28			
447		6" Metal Stud @ 16" O.C	LF	113	10%	124	\$ 1.70	\$ 210.99	0.018	2.23	\$ 45.00	\$ 0.81	\$ 100.49	\$ 311.39			
448		6" Bottom Runner	LF	15	10%	17	\$ 1.70	\$ 28.05	0.018	0.30	\$ 45.00	\$ 0.81	\$ 13.37	\$ 41.42			
449		6" Top Runner	LF	15	10%	17	\$ 1.70	\$ 28.05	0.018	0.30	\$ 45.00	\$ 0.81	\$ 13.37	\$ 41.42			
450		Sealant	LF	60	10%	66	\$ 0.40	\$ 26.40	0.010	0.66	\$ 45.00	\$ 0.45	\$ 29.70	\$ 56.10			
G-3: 3-5/8" Metal Stud Furring Wall							1F	20	10								
451		1 Layer Of 5/8" Cement Board On One Side	SF	180	10%	198											
452		Gypsum Board Sheet (4'-0"x8'-0")	EA	6	10%	7	\$ 31.00	\$ 210.99	0.360	2.45	\$ 45.00	\$ 16.20	\$ 110.26	\$ 321.26			
453		Tapping	LF	90	10%	99	\$ 0.12	\$ 11.88	0.010	0.99	\$ 45.00	\$ 0.45	\$ 44.55	\$ 56.43			
454		Mudding	LBS	10	10%	12	\$ 1.53	\$ 16.06	0.128	1.34	\$ 45.00	\$ 5.76	\$ 60.45	\$ 76.50			
455		Screw	EA	297	0%	297	\$ 0.05	\$ 14.85	0.000	0.00	\$ -	\$ -	\$ -	\$ 14.85			
456		3-5/8" Metal Stud @ 16" O.C	LF	150	10%	165	\$ 1.45	\$ 239.85	0.016	2.65	\$ 45.00	\$ 0.72	\$ 119.10	\$ 358.95			
457		3-5/8" Bottom Runner	LF	20	10%	22	\$ 1.45	\$ 31.90	0.016	0.35	\$ 45.00	\$ 0.72	\$ 15.84	\$ 47.74			
458		3-5/8" Top Runner	LF	20	10%	22	\$ 1.45	\$ 31.90	0.016	0.35	\$ 45.00	\$ 0.72	\$ 15.84	\$ 47.74			
459		Sealant	LF	40	10%	44	\$ 0.40	\$ 17.60	0.010	0.44	\$ 45.00	\$ 0.45	\$ 19.80	\$ 37.40			
G-3: 3-5/8" Metal Stud Furring Wall							1F	30	10								
460		1 Layer Of 5/8" Gypsum Board On One Side	SF	270	10%	297											
461		Gypsum Board Sheet (4'-0"x8'-0")	EA	9	10%	10	\$ 18.25	\$ 186.32	0.320	3.27	\$ 45.00	\$ 14.40	\$ 147.02	\$ 333.34			
462		Tapping	LF	135	10%	149	\$ 0.12	\$ 17.82	0.010	1.49	\$ 45.00	\$ 0.45	\$ 66.83	\$ 84.65			
463		Mudding	LBS	14	10%	16	\$ 1.53	\$ 24.08	0.128	2.01	\$ 45.00	\$ 5.76	\$ 90.67	\$ 114.75			
464		Screw	EA	446	0%	446	\$ 0.05	\$ 22.28	0.000	0.00	\$ -	\$ -	\$ -	\$ 22.28			
465		3-5/8" Metal Stud @ 16" O.C	LF	226	10%	248	\$ 1.45	\$ 359.77	0.016	3.97	\$ 45.00	\$ 0.72	\$ 178.65	\$ 538.43			
466		3-5/8" Bottom Runner	LF	30	10%	33	\$ 1.45	\$ 47.85	0.016	0.53	\$ 45.00	\$ 0.72	\$ 23.76	\$ 71.61			
467		3-5/8" Top Runner	LF	30	10%	33	\$ 1.45	\$ 47.85	0.016	0.53	\$ 45.00	\$ 0.72	\$ 23.76	\$ 71.61			
468		Sealant	LF	60	10%	66	\$ 0.40	\$ 26.40	0.010	0.66	\$ 45.00	\$ 0.45	\$ 29.70	\$ 56.10			
G-4: 6" Metal Stud Furring Wall							1F	18	10								
469		1 Layer Of 5/8" Gypsum Board On One Side	SF	144	10%	158											
470		Gypsum Board Sheet (4'-0"x8'-0")	EA	5	10%	5	\$ 18.25	\$ 90.37	0.320	1.74	\$ 45.00	\$ 14.40	\$ 78.41	\$ 177.78			
471		Tapping	LF	72	10%	79	\$ 0.12	\$ 9.50	0.010	0.79	\$ 45.00	\$ 0.45	\$ 35.64	\$ 45.14			
472		Mudding	LBS	8	10%	8	\$ 1.53	\$ 12.84	0.128	1.07	\$ 45.00	\$ 5.76	\$ 48.36	\$ 61.20			
473		Screw	EA	238	0%	238	\$ 0.05	\$ 11.88	0.000	0.00	\$ -	\$ -	\$ -	\$ 11.88			
474		6" Metal Stud @ 16" O.C	LF	135	10%	149	\$ 1.70	\$ 253.08	0.018	2.68	\$ 45.00	\$ 0.81	\$ 120.59	\$ 373.67			
475		6" Bottom Runner	LF	18	10%	20	\$ 1.70	\$ 33.66	0.018	0.36	\$ 45.00	\$ 0.81	\$ 16.04	\$ 49.70			
476		6" Top Runner	LF	18	10%	20	\$ 1.70	\$ 33.66	0.018	0.36	\$ 45.00	\$ 0.81	\$ 16.04	\$ 49.70			
477		Sealant	LF	36	10%	40	\$ 0.40	\$ 15.84	0.010	0.40	\$ 45.00	\$ 0.45	\$ 17.82	\$ 33.66			
G-4: 3-5/8" Metal Stud Furring Wall							1F	2	10								
478		1 Layer Of 5/8" Gypsum Board On One Side	SF	16	10%	18											
479		Gypsum Board Sheet (4'-0"x8'-0")	EA	1	10%	1	\$ 18.25	\$ 11.04	0.320	0.19	\$ 45.00	\$ 14.40	\$ 8.71	\$ 19.75			
480		Tapping	LF	8	10%	9	\$ 0.12	\$ 1.06	0.010	0.09	\$ 45.00	\$ 0.45	\$ 3.96	\$ 5.02			
481		Mudding	LBS	1	10%	1	\$ 1.53	\$ 1.43	0.128	0.12	\$ 45.00	\$ 5.76	\$ 5.37	\$ 6.80			
482		Screw	EA	26	0%	26	\$ 0.05	\$ 1.32	0.000	0.00	\$ -	\$ -	\$ -	\$ 1.32			
483		3-5/8" Metal Stud @ 16" O.C	LF	15	10%	17	\$ 1.45	\$ 23.98	0.016	0.26	\$ 45.00	\$ 0.72	\$ 11.91	\$ 35.89			
484		3-5/8" Bottom Runner	LF	2	10%	2	\$ 1.45	\$ 3.19	0.016	0.04	\$ 45.00	\$ 0.72	\$ 1.58	\$ 4.77			
485		3-5/8" Top Runner	LF	2	10%	2	\$ 1.45	\$ 3.19	0.016	0.04	\$ 45.00	\$ 0.72	\$ 1.58	\$ 4.77			
486		Sealant	LF	4	10%	4	\$ 0.40	\$ 1.76	0.010	0.04	\$ 45.00	\$ 0.45	\$ 1.98	\$ 3.74			
GA-1: 3-5/8" Metal Stud Wall							1F	30	10								
487		1 Layer Of 5/8" Gypsum Board On One Side	SF	300	10%	330											
488		Gypsum Board Sheet (4'-0"x8'-0")	EA	10	10%	11	\$ 18.25	\$ 207.02	0.320	3.63	\$ 45.00	\$ 14.40	\$ 163.35	\$ 370.37			
489		Tapping	LF	150	10%	165	\$ 0.12	\$ 19.80	0.010	1.65	\$ 45.00	\$ 0.45	\$ 74.25	\$ 94.05			
490		Mudding	LBS	16	10%	17	\$ 1.53	\$ 26.76	0.128	2.24	\$ 45.00	\$ 5.76	\$ 100.74	\$ 127.50			
491		Screw	EA	495	0%	495	\$ 0.05	\$ 24.75	0.000	0.00	\$ -	\$ -	\$ -	\$ 24.75			
492		1 Layer Of 5/8" Cement Board On One Side	SF	300	10%	330											
493		Gypsum Board Sheet (4'-0"x8'-0")	EA	10	10%	11	\$ 31.00	\$ 351.66	0.360	4.08	\$ 45.00	\$ 16.20	\$ 183.77	\$ 535.43			
494		Tapping	LF	150	10%	165	\$ 0.12	\$ 19.80	0.010	1.65	\$ 45.00	\$ 0.45	\$ 74.25	\$ 94.05			
495		Mudding	LBS	16	10%	17	\$ 1.53	\$ 26.76	0.128	2.24	\$ 45.00	\$ 5.76	\$ 100.74	\$ 127.50			
496		Screw	EA	495	0%	495	\$ 0.05	\$ 24.75	0.000	0.00	\$ -	\$ -	\$ -	\$ 24.75			
497		3-1/2" Acoustic Batt Insulation	SF	300	10%	330	\$										

COST ESTIMATE BREAKDOWN

PROJECT ID: ADDRESS: SCOPE: GC DATE: 12-Aug-24 GROSS AREA: 10784 PREPARED BY:							TOTAL MATERIAL COST TOTAL LABOR COST TOTAL TRADES COST SALES TAX OVERHEAD & PROFIT INSURANCE & BONDING								\$ 1,226,736.19 \$ 764,494.82 \$ 1,991,231.01 \$ 95,072.05 \$ 298,684.65 \$ 59,736.93
							BID AMOUNT TOTAL LABOR HOURS								\$ 2,444,724.65
LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL	UNIT COST	TOTAL COST	LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
532		8" Bottom Runner	LF	3	10%	3	\$	2.10	\$ 6.93	0.020	0.07	\$ 45.00	\$ 0.90	\$ 2.97	\$ 9.90
533		8" Top Runner	LF	3	10%	3	\$	2.10	\$ 6.93	0.020	0.07	\$ 45.00	\$ 0.90	\$ 2.97	\$ 9.90
534		2-1/2" Metal Stud @ 16" O.C	LF	7	10%	7	\$	1.10	\$ 8.19	0.012	0.09	\$ 45.00	\$ 0.54	\$ 4.02	\$ 12.21
535		2-1/2" Bottom Runner	LF	3	10%	3	\$	1.10	\$ 3.63	0.012	0.04	\$ 45.00	\$ 0.54	\$ 1.78	\$ 5.41
536		2-1/2" Top Runner	LF	3	10%	3	\$	1.10	\$ 3.63	0.012	0.04	\$ 45.00	\$ 0.54	\$ 1.78	\$ 5.41
537		Sealant	LF	6	10%	7	\$	0.40	\$ 2.64	0.010	0.07	\$ 45.00	\$ 0.45	\$ 2.97	\$ 5.61
EX-1: 3-5/8" Metal Stud Wall															
538		1 Layer Of 5/8" Gypsum Board On One Side	LF	24	8										
539		Gypsum Board Sheet (4'0"x8'-0")	SF	192	10%	211	\$	18.25	\$ 132.50	0.320	2.32	\$ 45.00	\$ 14.40	\$ 104.54	\$ 237.04
540		Tapping	LF	96	10%	106	\$	0.12	\$ 12.67	0.010	1.06	\$ 45.00	\$ 0.45	\$ 47.52	\$ 60.19
541		Mudding	LBS	10	10%	11	\$	1.53	\$ 17.13	0.128	1.43	\$ 45.00	\$ 5.76	\$ 64.48	\$ 81.60
542		Screw	EA	317	0%	317	\$	0.05	\$ 15.84	0.000	0.00	\$ -	\$ -	\$ -	\$ 15.84
543		1 Layer Of 5/8" Fiberglass Sheathing On One Side	SF	192	10%	211	\$	48.00	\$ 348.48	0.360	2.61	\$ 45.00	\$ 16.20	\$ 117.61	\$ 466.09
544		Nails	EA	9	10%	7	\$	0.05	\$ 24.75	0.000	0.00	\$ -	\$ -	\$ -	\$ 24.75
545		3-1/2" Acoustic Batten Insulation	SF	192	10%	211	\$	1.32	\$ 278.78	0.012	2.53	\$ 45.00	\$ 0.54	\$ 114.05	\$ 392.83
546		8" Metal Stud @ 16" O.C	LF	144	10%	159	\$	2.10	\$ 333.47	0.020	3.18	\$ 45.00	\$ 0.90	\$ 142.92	\$ 476.39
548		8" Bottom Runner	LF	24	10%	26	\$	2.10	\$ 55.44	0.020	0.53	\$ 45.00	\$ 0.90	\$ 23.76	\$ 79.20
549		8" Top Runner	LF	24	10%	26	\$	2.10	\$ 55.44	0.020	0.53	\$ 45.00	\$ 0.90	\$ 23.76	\$ 79.20
550		2-1/2" Metal Stud @ 16" O.C	LF	144	10%	159	\$	1.10	\$ 174.68	0.012	1.91	\$ 45.00	\$ 0.54	\$ 85.75	\$ 260.43
551		2-1/2" Bottom Runner	LF	24	10%	26	\$	1.10	\$ 29.04	0.012	0.32	\$ 45.00	\$ 0.54	\$ 14.26	\$ 43.30
552		2-1/2" Top Runner	LF	24	10%	26	\$	1.10	\$ 29.04	0.012	0.32	\$ 45.00	\$ 0.54	\$ 14.26	\$ 43.30
553		Sealant	LF	48	10%	53	\$	0.40	\$ 21.12	0.010	0.53	\$ 45.00	\$ 0.45	\$ 23.76	\$ 44.88
FBG-1: 3-5/8" Metal Stud Furring Wall															
554		1 Layer Of 5/8" Gypsum Board On One Side	LF	9	10										
555		Gypsum Board Sheet (4'0"x8'-0")	SF	90	10%	99	\$	18.25	\$ 62.11	0.320	1.09	\$ 45.00	\$ 14.40	\$ 49.01	\$ 111.11
556		Tapping	LF	45	10%	50	\$	0.12	\$ 5.94	0.010	0.50	\$ 45.00	\$ 0.45	\$ 22.28	\$ 28.22
557		Mudding	LBS	5	10%	5	\$	1.53	\$ 8.03	0.128	0.67	\$ 45.00	\$ 5.76	\$ 30.22	\$ 38.25
558		Screw	EA	149	0%	149	\$	0.05	\$ 7.43	0.000	0.00	\$ -	\$ -	\$ -	\$ 7.43
559		3-5/8" Metal Stud @ 16" O.C	LF	68	10%	74	\$	1.45	\$ 107.93	0.016	1.19	\$ 45.00	\$ 0.72	\$ 53.59	\$ 161.53
560		3-5/8" Bottom Runner	LF	9	10%	10	\$	1.45	\$ 14.36	0.016	0.16	\$ 45.00	\$ 0.72	\$ 7.13	\$ 21.48
561		3-5/8" Top Runner	LF	9	10%	10	\$	1.45	\$ 14.36	0.016	0.16	\$ 45.00	\$ 0.72	\$ 7.13	\$ 21.48
562		Sealant	LF	36	10%	40	\$	0.40	\$ 15.84	0.010	0.40	\$ 45.00	\$ 0.45	\$ 17.82	\$ 33.66
FLOORING															
C-1 & 2: Flooring															
563		-Mgr: Kinex -Style: Soundtrack -Color: Digital 1847/3026	SF	1499	10%	1649	\$	5.35	\$ 8,822.79	0.065	107.19	\$ 48.00	\$ 3.12	\$ 5,145.25	\$ 13,968.05
564		-Mgr: Kinex -Style: Album -Color: Digital 1847/3017	SF	2226	10%	2449	\$	5.35	\$ 13,102.83	0.065	159.19	\$ 48.00	\$ 3.12	\$ 7,641.28	\$ 20,744.11
565		CT-1: Flooring -Mgr: Crossville -Style: Mosaic -Color: Travertine Sand	SF	322	10%	354	\$	18.20	\$ 6,441.03	0.075	26.54	\$ 48.00	\$ 3.60	\$ 1,274.05	\$ 7,715.09
566		CT-2: Flooring -Mgr: Daltille w/ Stepwise -Style: Saddle Brook -Color: Framhouse XTSD84	SF	667	10%	734	\$	5.40	\$ 3,963.41	0.070	51.38	\$ 48.00	\$ 3.36	\$ 2,466.12	\$ 6,429.52
567		LVT-2: Flooring -Mgr: Toll -Style: Strateline -Color: Bedrock 506	SF	749	10%	824	\$	4.25	\$ 3,501.58	0.065	53.55	\$ 48.00	\$ 3.12	\$ 2,570.57	\$ 6,072.14
568		RSF-1: Flooring -Mgr: Advanced Edge Sports Solutions -Style: Rubber Sports Floor -Color: Blue Cheer AE630	SF	326	10%	359	\$	3.19	\$ 1,143.93	0.060	21.52	\$ 48.00	\$ 2.88	\$ 1,032.77	\$ 2,176.70
569		PC: Flooring -Mgr: Retroplate 99 -Style: Polished Concrete Sealer-Hardener -Color: Saffy Yellow, & Black	SF	3430	10%	3773	\$	1.44	\$ 5,432.45	0.055	207.49	\$ 48.00	\$ 2.64	\$ 9,959.50	\$ 15,391.96
FLOOR TRANSITION															
MES-F2: Floor Transition															
570		-Mgr: Schuler -Style: Tile To Carpet -Color: Reno TK, SS 2VA	LF	18	10%	20	\$	2.35	\$ 46.51	0.035	0.69	\$ 48.00	\$ 1.68	\$ 33.26	\$ 79.77
571		MES-F3: Floor Transition -Mgr: Schuler -Style: Carpet To No Flooring -Color: Reno ramp'h, Aluminum Stain	LF	3	10%	3	\$	2.35	\$ 7.91	0.035	0.12	\$ 48.00	\$ 1.68	\$ 5.65	\$ 13.56
572		MES-F1.2 -Mgr: Schuler -Style: Carpet To Tile -Color: Reno TK	LF	3	10%	3	\$	2.35	\$ 7.75	0.035	0.12	\$ 48.00	\$ 1.68	\$ 5.54	\$ 13.29
573		RRS-1: Floor Transition -MFR: Johnsonite -Material: Carpet To Resilient -Pattern: CTA-xx-C	LF	15	10%	16	\$	3.97	\$ 64.63	0.035	0.57	\$ 48.00	\$ 1.68	\$ 27.35	\$ 91.98
574		RRS-3: Floor Transition -MFR: Johnsonite -Material: Carpet To Carpet -Pattern: CTA-xx-M	LF	3	10%	3	\$	3.97	\$ 13.06	0.035	0.12	\$ 48.00	\$ 1.68	\$ 5.53	\$ 18.58
575		RRS-4: Floor Transition -MFR: Johnsonite -Material: LVT To RSF-1 -Pattern: CTA-xx-K	LF	3	10%	3	\$	3.97	\$ 13.10	0.035	0.12	\$ 48.00	\$ 1.68	\$ 5.54	\$ 18.65
576		M.TB: Marble Threshold	LF	19	10%	21	\$	12.99	\$ 267.06	0.100	2.06	\$ 48.00	\$ 4.80	\$ 98.68	\$ 365.74
WALL BASE															
B-1: Rubber Base 6"H															
577		-Mgr: Mohawk Commercial -Style: 984 -Color: Matte Black	LF	506	10%	557	\$	4.63	\$ 2,577.06	0.035	19.48	\$ 48.00	\$ 1.68	\$ 935.09	\$ 3,512.15
578		BW-1: Wood Base 6" -Style: Wall Street -Color: SW 7665	LF	982	10%	1080	\$	3.68	\$ 3,975.14	0.030	32.41	\$ 48.00	\$ 1.44	\$ 1,555.49	\$ 5,530.62
579		BW-3: Wood Base 6" -Style: Wall Street -Color: Light French Grey	LF	71	10%	78	\$	3.68	\$ 287.41	0.030	2.34	\$ 48.00	\$ 1.44	\$ 112.46	\$ 399.87
580		CTB-1.2: Tile Base Note: CTB-1 & CTB-2 Location Are not Given. Please Check & Verify.	LF	51	10%	56	\$	4.05	\$ 226.18	0.035	1.95	\$ 48.00	\$ 1.68	\$ 93.82	\$ 320.00
581		CTB-1: Tile Base -Mgr: Crossville -Style: Single Bullnose 4"x24" -Color: Travertine Sand	LF	113	10%	124	\$	6.01	\$ 746.51	0.035	4.35	\$ 48.00	\$ 1.68	\$ 208.68	\$ 955.19
582		CTB-2: Tile Base -Mgr: Daltille -Style: Saddle Brook 9"x36" -Color: Framhouse XTSD14	LF	35	10%	39	\$	4.05	\$ 157.31	0.035	1.36	\$ 48.00	\$ 1.68	\$ 65.25	\$ 222.56
583		WB-3: Wood Base	LF	40	10%	43	\$	3.68	\$ 159.90	0.030	1.30	\$ 48.00	\$ 1.44	\$ 62.57	\$ 222.46
WALL TILE															
CW-1.1: Wall Tile															
584		-Mgr: Daltille -Style: Wheel Linear 6"x18" -Color: Matte Urban Putty 0761	SF	126	10%	139	\$	5.95	\$ 824.67	0.100	13.86	\$ 48.00	\$ 4.80	\$ 665.28	\$ 1,489.95

PROJECT ID:		TOTAL MATERIAL COST		\$ 1,226,736.19
ADDRESS:		TOTAL LABOR COST		\$ 764,494.82
SCOPE: GC		TOTAL TRADES COST		\$ 1,991,231.01
DATE: 12-Aug-24		SALES TAX	7.75%	\$ 95,072.05
GROSS AREA: 10784		OVERHEAD & PROFIT	15.00%	\$ 298,684.65
PREPARED BY:		INSURANCE & BONDING	3.00%	\$ 59,736.93
		BID AMOUNT		\$ 2,444,724.65
		TOTAL LABOR HOURS		

LINE NO.	CSDIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL		LABOR						
							UNIT COST	TOTAL COST	UNIT LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST	
585		CWT-1, CWT-1: Wall Tile -Mgr: Garden State Tile -Style: Gap Quill -Color: Deniam 4"x12" Note: CWT-1& CWT-2 Heights are Not Given. Please Check & Verify.	SF	227	10%	250	\$ 7.23	\$ 1,805.33	0.100	24.97	\$ 48.00	\$ 4.80	\$ 1,198.56	\$ 3,003.89	
586		CWT-3: Wall Tile -Mgr: Crossville -Style: Access Point Travertine -Color: Travertine Sand 12"x24"	SF	729	10%	802	\$ 4.89	\$ 3,921.29	0.100	80.19	\$ 48.00	\$ 4.80	\$ 3,849.12	\$ 7,770.41	
587		CWT-6: Wall Tile -Mgr: Daltile -Style: Wheel Linear 2"x8" -Color: Desert Grey 0714	SF	34	10%	37	\$ 5.95	\$ 222.53	0.100	3.74	\$ 48.00	\$ 4.80	\$ 179.52	\$ 402.05	
588		WP-1: Wall Paper -Mgr: Walltalkers -Style: Presentation Dry Erase Wall Covering -Color: White Matte	SF	84	10%	92	\$ 8.90	\$ 822.36	0.042	3.88	\$ 48.00	\$ 2.02	\$ 186.28	\$ 1,008.64	
589		Raised Wood Panel	SF	8	10%	9	\$ 4.88	\$ 42.94	0.045	0.40	\$ 48.00	\$ 2.16	\$ 19.01	\$ 61.95	
		WALL FINISH													
590		Decorative Trim board & Molding -Mgr: TBD -Style: TBD -Color: TBD	SF	844	10%	928	\$ 3.20	\$ 2,970.88	0.032	29.71	\$ 48.00	\$ 1.54	\$ 1,426.02	\$ 4,396.90	
591		3/4" Veneer Faced Plywood -Mgr: TBD -Style: TBD -Color: TBD	SF	105	10%	116	\$ 1.81	\$ 209.06	0.018	2.08	\$ 48.00	\$ 0.86	\$ 99.79	\$ 308.85	
592		Decorative Backplash -Mgr: TBD -Style: TBD -Color: TBD	SF	8	10%	9	\$ 24.00	\$ 211.20	0.065	0.57	\$ 48.00	\$ 3.12	\$ 27.46	\$ 238.66	
		TRIMS													
593		Wood 5/4" Vertical Trim	LF	131	10%	144	\$ 3.38	\$ 487.06	0.032	4.61	\$ 48.00	\$ 1.54	\$ 221.34	\$ 708.40	
594		Wood Apron Trim 4"	LF	9	10%	10	\$ 3.53	\$ 35.37	0.028	0.28	\$ 48.00	\$ 1.34	\$ 13.47	\$ 48.84	
595		Wood Panel @ Island 6"	LF	6	10%	6	\$ 4.88	\$ 30.87	0.045	0.28	\$ 48.00	\$ 2.16	\$ 13.66	\$ 44.53	
		CEILING									\$ 48.00				
596		C-1: 5/8" Gypsum Board Ceiling W/ -3-5/8" Stud Framing	SF	2468	10%	2715	\$ 1.67	\$ 4,533.72	0.032	86.87	\$ 48.00	\$ 1.54	\$ 4,169.93	\$ 8,703.65	
597		C-1: 5/8" Moisture Resistance Gypsum Board Ceiling -3-5/8" Stud Framing	SF	45	10%	50	\$ 1.74	\$ 86.13	0.032	1.58	\$ 48.00	\$ 1.54	\$ 76.03	\$ 162.16	
598		C-2: Acoustical Ceiling W/ Grid -Size: 2' x 2' -Mgr: Armstrong -Item: #1772, Fine Texture -Color: White	SF	3116	10%	3428	\$ 4.17	\$ 14,293.09	0.060	205.66	\$ 48.00	\$ 2.88	\$ 9,871.49	\$ 24,164.58	
		CEILING SOFFIT													
599		C-1: 5/8" Gypsum Board Ceiling Soffit (6" H)	SF	55	10%	60	\$ 0.98	\$ 58.75	0.025	1.50	\$ 45.00	\$ 1.13	\$ 67.44	\$ 126.19	
600		3-5/8" Metal Stud Framing	LF	82	10%	90	\$ 1.45	\$ 130.39	0.016	1.44	\$ 45.00	\$ 0.72	\$ 64.75	\$ 195.14	
601		C-1: 5/8" Gypsum Board Ceiling Soffit (1'-6" H)	SF	267	10%	294	\$ 0.98	\$ 287.83	0.025	7.34	\$ 45.00	\$ 1.13	\$ 330.41	\$ 618.24	
602		3-5/8" Metal Stud Framing	LF	223	10%	245	\$ 1.45	\$ 354.89	0.016	3.92	\$ 45.00	\$ 0.72	\$ 176.22	\$ 531.11	
		PAINT													
		WALL PAINT													
603		EP-1: Epoxy Paint @ CMU Wall -Mgr: Sherwin Williams -Finish: Eggshell Epoxy Paint -Color: Taupe Tone SW#7633	SF	5870	10%	6457	\$ 1.05	\$ 6,779.85	0.028	180.80	\$ 45.00	\$ 1.26	\$ 8,135.82	\$ 14,915.67	
604		EP-1: Epoxy Paint @ Existing Gypsum Board Wall -Mgr: Sherwin Williams -Finish: Eggshell Epoxy Paint -Color: Taupe Tone SW#7633	SF	263	10%	289	\$ 1.05	\$ 303.77	0.028	8.10	\$ 45.00	\$ 1.26	\$ 364.52	\$ 668.28	
605		EP-1: Epoxy Paint @ Gypsum Board Wall -Mgr: Sherwin Williams -Finish: Eggshell Epoxy Paint -Color: Taupe Tone SW#7633	SF	1477	10%	1625	\$ 1.05	\$ 1,705.94	0.028	45.49	\$ 45.00	\$ 1.26	\$ 2,047.12	\$ 3,753.06	
606		P-1: Paint @ CMU Wall -Mgr: Sherwin Williams -Finish: Latex Eggshell Paint -Color: Light French Grey SW#0055	SF	360	10%	396	\$ 1.05	\$ 415.80	0.028	11.09	\$ 45.00	\$ 1.26	\$ 498.96	\$ 914.76	
607		P-1: Paint @ Existing Gypsum Board Wall -Mgr: Sherwin Williams -Finish: Latex Eggshell Paint -Color: Light French Grey SW#0055	SF	2609	10%	2870	\$ 0.95	\$ 2,726.41	0.028	80.36	\$ 45.00	\$ 1.26	\$ 3,616.07	\$ 6,342.48	
608		P-1: Paint @ Gypsum Board Wall -Mgr: Sherwin Williams -Finish: Latex Eggshell Paint -Color: Light French Grey SW#0055	SF	3666	10%	4033	\$ 0.95	\$ 3,830.97	0.028	112.91	\$ 45.00	\$ 1.26	\$ 5,081.08	\$ 8,912.05	
609		P-2: Paint @ Existing Gypsum Board Wall -Mgr: Sherwin Williams -Finish: Latex Eggshell Paint -Color: Wall Street SW#7665	SF	320	10%	352	\$ 0.95	\$ 334.40	0.028	9.86	\$ 45.00	\$ 1.26	\$ 443.52	\$ 777.92	
610		P-2: Paint @ Gypsum Board Wall -Mgr: Sherwin Williams -Finish: Latex Eggshell Paint -Color: Wall Street SW#7665	SF	828	10%	911	\$ 0.95	\$ 865.26	0.028	25.50	\$ 45.00	\$ 1.26	\$ 1,147.61	\$ 2,012.87	
611		P-2: Paint @ Trim board & Molding Nickel Gap "Woods" -Mgr: Sherwin Williams -Finish: Latex Eggshell Paint -Color: Wall Street SW#7665	SF	828	10%	911	\$ 0.95	\$ 865.26	0.028	25.50	\$ 45.00	\$ 1.26	\$ 1,147.61	\$ 2,012.87	
612		P-3: Paint @ Existing Gypsum Board Wall -Mgr: Sherwin Williams -Finish: Latex Eggshell Paint -Color: Taupe Tone SW#7633	SF	1580	10%	1738	\$ 0.95	\$ 1,651.10	0.028	48.66	\$ 45.00	\$ 1.26	\$ 2,189.88	\$ 3,840.98	
613		P-3: Paint @ Gypsum Board Wall -Mgr: Sherwin Williams -Finish: Latex Eggshell Paint -Color: Taupe Tone SW#7633	SF	1496	10%	1646	\$ 0.95	\$ 1,563.32	0.028	46.08	\$ 45.00	\$ 1.26	\$ 2,073.46	\$ 3,636.78	
		CEILING PAINT													
614		CP-1: Paint @ Gypsum Board Ceiling & Soffit -Mgr: Sherwin Williams -Finish: Latex Flat Finish -Color: Classic White	SF	2790	10%	3069	\$ 0.95	\$ 2,915.55	0.032	98.21	\$ 45.00	\$ 1.44	\$ 4,419.36	\$ 7,334.91	
615		CP-2: Paint @ Gypsum Board Ceiling & Soffit -Mgr: Sherwin Williams -Finish: Low Luster, Catalyzed Epoxy-Water Base -Color: Classic White	SF	45	10%	50	\$ 0.95	\$ 47.03	0.032	1.58	\$ 45.00	\$ 1.44	\$ 71.28	\$ 118.31	
616		CP-3: Paint @ Exposed Ceiling -Mgr: Sherwin Williams -Finish: Dryfall, Catalyzed Epoxy-Water Base -Color: Tricorn Black SW-6258	SF	2403	10%	2643	\$ 0.95	\$ 2,511.14	0.032	84.59	\$ 45.00	\$ 1.44	\$ 3,806.35	\$ 6,317.49	
617		CP-3: Paint @ Exposed Ceiling -Mgr: Sherwin Williams -Finish: Dryfall, Catalyzed Epoxy-Water Base -Color: Tricorn Black SW-6258 Note: Paint Detail Are Not Given. Its Is Assumed. Please Check & Verify.	SF	608	10%	669	\$ 0.95	\$ 635.36	0.032	21.40	\$ 45.00	\$ 1.44	\$ 963.07	\$ 1,598.43	
		DOOR PAINT													

PROJECT ID:		TOTAL MATERIAL COST		\$ 1,226,736.19
ADDRESS:		TOTAL LABOR COST		\$ 764,494.82
SCOPE: GC		TOTAL TRADES COST		\$ 1,991,231.01
DATE: 12-Aug-24		SALES TAX	7.75%	\$ 95,072.05
GROSS AREA: 10784		OVERHEAD & PROFIT	15.00%	\$ 298,684.65
PREPARED BY:		INSURANCE & BONDING	3.00%	\$ 59,736.93
		BID AMOUNT		\$ 2,444,724.65
		TOTAL LABOR HOURS		

DIV. 10		SPECIALTY				SUBTOTAL		\$ 9,874.97	4.34			\$ 2,495.90		12,270.87	
		TOILET ROOM ACCESSORIES													
630	18" Grab Bar	EA	7	0%	7	\$	33.00	\$ 231.00	0.420	2.94	\$	50.00	\$ 21.00	\$ 147.00	\$ 378.00
631	36" Grab Bar	EA	7	0%	7	\$	35.99	\$ 251.93	0.420	2.94	\$	50.00	\$ 21.00	\$ 147.00	\$ 398.93
632	42" Grab Bar	EA	7	0%	7	\$	38.00	\$ 266.00	0.420	2.94	\$	50.00	\$ 21.00	\$ 147.00	\$ 413.00
633	Tissue Dispenser	EA	5	0%	5	\$	66.00	\$ 330.00	0.500	2.50	\$	50.00	\$ 25.00	\$ 125.00	\$ 455.00
634	Toilet Paper Disposal	EA	5	0%	5	\$	83.00	\$ 415.00	0.566	2.83	\$	50.00	\$ 28.30	\$ 141.50	\$ 556.50
635	Soap Dispenser	EA	5	0%	5	\$	57.00	\$ 285.00	0.490	2.45	\$	50.00	\$ 24.50	\$ 122.50	\$ 407.50
636	Wall Mirror	EA	5	0%	5	\$	156.00	\$ 780.00	1.220	6.10	\$	50.00	\$ 61.00	\$ 305.00	\$ 1,085.00
637	Coat Hook	EA	5	0%	5	\$	23.00	\$ 115.00	0.300	1.50	\$	50.00	\$ 15.00	\$ 75.00	\$ 190.00
		AWNING													
638	Provide New Awning Fabric into Existing Awning Frame	SF	117	10%	129	\$	56.00	\$ 7,201.04	0.200	\$ 25.72	\$	50.00	\$ 10.00	\$ 1,285.90	\$ 8,486.94
DIV. 11		EQUIPMENT				SUBTOTAL		\$ 42,984.14	25.73			\$ 4,922.58		47,906.64	
		EQUIPMENT													
639	Curtain Rod (3'-6" LF) w/ Hooks (8 EA)	EA	4	0%	4	\$	328.54	\$ 1,314.16	1.590	6.36	\$	50.00	\$ 79.50	\$ 318.00	\$ 1,632.16
640	Curtain (3'-3"x6'-0")	EA	2	0%	2	\$	616.00	\$ 1,232.00	2.130	4.26	\$	50.00	\$ 106.50	\$ 213.00	\$ 1,445.00
641	Washing Machine	EA	1	0%	1	\$	880.00	\$ 880.00	2.000	2.00	\$	50.00	\$ 100.00	\$ 100.00	\$ 980.00
642	Wall Mounted Monitor -Size: (4'-0"x2'-6")	EA	2	0%	2	\$	499.99	\$ 999.98	1.440	2.88	\$	50.00	\$ 72.00	\$ 144.00	\$ 1,143.98
643	Padded Full-Depth Transfer	EA	4	0%	4	\$	354.00	\$ 1,416.00	0.420	1.68	\$	50.00	\$ 21.00	\$ 84.00	\$ 1,500.00
644	Over Range Microwave Oven	EA	1	0%	1	\$	649.00	\$ 649.00	0.880	0.88	\$	50.00	\$ 44.00	\$ 44.00	\$ 693.00
645	Dryer Machine	EA	1	0%	1	\$	800.00	\$ 800.00	2.000	2.00	\$	50.00	\$ 100.00	\$ 100.00	\$ 900.00
646	Drinking Fountain @ Corridor	EA	2	0%	2	\$	3,094.00	\$ 6,188.00	6.120	12.24	\$	50.00	\$ 306.00	\$ 612.00	\$ 6,800.00
647	Cooking Range w/ 4 Stock	EA	1	0%	1	\$	1,855.00	\$ 1,855.00	2.550	2.55	\$	50.00	\$ 127.50	\$ 127.50	\$ 1,982.50
648	12"x24"x72" 2-Tier Locker	EA	20	0%	20	\$	1,299.00	\$ 25,980.00	3.000	60.00	\$	50.00	\$ 150.00	\$ 3,000.00	\$ 28,980.00
649	Sink	EA	1	0%	1	\$	422.00	\$ 422.00	2.000	2.00	\$	50.00	\$ 100.00	\$ 100.00	\$ 522.00
650	Refrigerator	EA	1	0%	1	\$	1,248.00	\$ 1,248.00	1.660	1.66	\$	50.00	\$ 80.00	\$ 80.00	\$ 1,328.00
DIV. 12		FURNISHINGS				SUBTOTAL		\$ 23,331.70	7.21			\$ 2,782.73		26,114.43	
		COUNTERTOP & BACKSPLASH													
		COUNTERTOP													
651	C-C: Decorative Concrete Counter Top	SF	48	10%	53	\$	93.00	\$ 4,910.40	0.180	9.50	\$	50.00	\$ 9.00	\$ 475.20	\$ 5,385.60
652	Quartz Counter Top -Mgr: Corian -Finish: Quartz -Color: Beige Royal	SF	136	10%	150	\$	80.00	\$ 11,968.00	0.180	26.93	\$	50.00	\$ 9.00	\$ 1,346.40	\$ 13,314.40
		BACK SPLASH													
653	Quartz Backplash -Mgr: Corian -Finish: Quartz -Color: Beige Royal	LF	63	10%	69	\$	31.00	\$ 2,148.30	0.082	5.68	\$	50.00	\$ 4.10	\$ 284.13	\$ 2,432.43
		MISC.													
654	Marker Board (6'-0"x4'-0")	EA	3	0%	3	\$	628.00	\$ 1,884.00	1.220	3.66	\$	50.00	\$ 61.00	\$ 183.00	\$ 2,067.00
655	Marker Board (8'-0"x4'-0")	EA	1	0%	1	\$	755.00	\$ 755.00	1.220	2.22	\$	50.00	\$ 61.00	\$ 61.00	\$ 816.00
656	Shower (3'-0"x3'-0")	EA	2	0%	2	\$	833.00	\$ 1,666.00	4.330	8.66	\$	50.00	\$ 216.50	\$ 433.00	\$ 2,099.00
DIV. 22		PLUMBING				SUBTOTAL		\$ 97,188.73	102.24			\$ 37,655.89		134,844.62	
		1ST FLOOR													
		DRAIN PIPING													
657	2" Water Pipe	LF	22	10%	24	\$	9.15	\$ 222.03	0.271	6.58	\$	56.00	\$ 15.18	\$ 368.26	\$ 590.29
658	2" Vent Pipe	LF	175	10%	192	\$	9.15	\$ 1,751.15	0.271	52.04	\$	56.00	\$ 15.18	\$ 2,914.37	\$ 4,671.52
659	4" Water Pipe	LF	321	10%	354	\$	21.50	\$ 7,600.64	0.333	117.72	\$	56.00	\$ 18.65	\$ 6,592.40	\$ 14,193.04
660	1-1/2" Vent Pipe	LF	48	10%	53	\$	8.20	\$ 432.96	0.222	11.72	\$	56.00	\$ 12.43	\$ 656.41	\$ 1,089.37
		ELBOW													
661	2" Pipe Elbow	EA	12	0%	12	\$	2.80	\$ 33.60	0.440	5.28	\$	56.00	\$ 24.64	\$ 295.68	\$ 329.28
662	4" Pipe Elbow	EA	25	0%	25	\$	17.10	\$ 427.50	0.879	21.98	\$	56.00	\$ 49.22	\$ 1,230.60	\$ 1,658.10
		TEE													
663	4" Y Tee	EA	15	0%	15	\$	25.50	\$ 382.50	1.332	19.98	\$	56.00	\$ 74.59	\$ 1,118.88	\$ 1,501.38
664	2" Y Tee	EA	1	0%	1	\$	3.52	\$ 3.52	0.661	0.66	\$	56.00	\$ 37.02	\$ 37.02	\$ 40.54
		FIXTURE													
665	4" P Trap	EA	5	0%	5	\$	51.99	\$ 259.95	0.560	2.80	\$	56.00	\$ 31.36	\$ 156.80	\$ 416.75
666	Water Closet	EA	5	0%	5	\$	655.00	\$ 3,275.00	3.220	16.10	\$	56.00	\$ 180.32	\$ 901.60	\$ 4,176.60
667	Lavatory W/ Faucet	EA	6	0%	6	\$	599.00	\$ 3,594.00	3.000	18.00	\$	56.00	\$ 168.00	\$ 1,008.00	\$ 4,602.00
668	Tee Stop Cork	EA	9	0%	9	\$	29.36	\$ 264.24	0.400	3.60	\$	56.00	\$ 22.40	\$ 201.60	\$ 465.84
669	Double Bowl Sink	EA	1	0%	1	\$	714.20	\$ 714.20	3.500	3.50	\$	56.00	\$ 196.00	\$ 196.00	\$ 910.20
670	Hot & Cold Water Mixture	EA	1	0%	1	\$	301.47	\$ 301.47	1.100	1.10	\$	56.00	\$ 61.60	\$ 61.60	\$ 363.07
		PLUMBING FIXTURE													

COST ESTIMATE BREAKDOWN

PROJECT ID:					TOTAL MATERIAL COST					\$ 1,226,736.19				
ADDRESS:					TOTAL LABOR COST					\$ 764,494.82				
SCOPE: GC					TOTAL TRADES COST					\$ 1,991,231.01				
DATE: 12-Aug-24					SALES TAX					7.75%				
GROSS AREA: 10784					OVERHEAD & PROFIT					15.00%				
PREPARED BY:					INSURANCE & BONDING					3.00%				
					BID AMOUNT					\$ 2,444,724.65				
					TOTAL LABOR HOURS									

LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL	TOTAL COST	LABOR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
671		EJP-1: Pump -Service: Sink, Dishwasher, ICE -Pump Type: Centrifugal -GPM: 30	EA	1	0%	1	\$ 3,266.00	\$ 3,266.00	5.200	5.20	\$ 56.00	\$ 291.20	\$ 291.20	\$ 3,557.20
WATER PIPE														
672		2" Water Pipe	LF	15	10%	17	\$ 24.50	\$ 404.25	0.200	3.30	\$ 56.00	\$ 11.20	\$ 184.80	\$ 589.05
673		1-1/2" Incoming Domestic Well Water Pipe	LF	12	10%	13	\$ 16.00	\$ 211.55	0.160	2.12	\$ 56.00	\$ 8.96	\$ 118.47	\$ 330.02
674		1" Water Pipe	LF	89	10%	97	\$ 9.60	\$ 934.88	0.121	11.78	\$ 56.00	\$ 6.78	\$ 659.87	\$ 1,594.74
675		2" Force Main Pipe	LF	44	10%	48	\$ 24.50	\$ 1,187.42	0.200	9.69	\$ 56.00	\$ 11.20	\$ 542.82	\$ 1,730.24
676		1/2" Water Pipe	LF	205	10%	225	\$ 4.25	\$ 956.36	0.103	23.18	\$ 56.00	\$ 5.77	\$ 1,297.96	\$ 2,254.32
677		3/4" Water Pipe	LF	402	10%	442	\$ 7.15	\$ 3,158.51	0.108	47.71	\$ 56.00	\$ 6.05	\$ 2,671.70	\$ 5,830.20
678		1-1/4" Pipe	LF	204	10%	224	\$ 12.15	\$ 2,722.32	0.143	32.04	\$ 56.00	\$ 8.01	\$ 1,994.26	\$ 4,516.58
679		1-1/2" Water Pipe	LF	92	10%	101	\$ 16.00	\$ 1,616.40	0.160	16.10	\$ 56.00	\$ 8.96	\$ 900.82	\$ 2,512.22
680		3" Water Pipe	LF	14	10%	16	\$ 54.00	\$ 855.95	0.296	4.69	\$ 56.00	\$ 16.58	\$ 262.75	\$ 1,118.70
ELBOW														
681		2" Pipe Elbow	EA	12	0%	12	\$ 56.50	\$ 678.00	0.727	8.72	\$ 56.00	\$ 40.71	\$ 488.54	\$ 1,166.54
682		1" Pipe Elbow	EA	10	0%	10	\$ 13.45	\$ 134.50	0.500	5.00	\$ 56.00	\$ 28.00	\$ 280.00	\$ 414.50
683		1-1/2" Elbow	EA	12	0%	12	\$ 31.00	\$ 372.00	0.615	7.38	\$ 56.00	\$ 34.44	\$ 413.28	\$ 785.28
684		1-1/4" Elbow	EA	5	0%	5	\$ 19.95	\$ 99.75	0.533	2.67	\$ 56.00	\$ 29.85	\$ 149.24	\$ 248.99
685		1/2" Elbow	EA	10	0%	10	\$ 2.49	\$ 24.90	0.400	4.00	\$ 56.00	\$ 22.40	\$ 224.00	\$ 248.90
686		3/4" Elbow	EA	21	0%	21	\$ 5.40	\$ 113.40	0.421	8.84	\$ 56.00	\$ 23.38	\$ 495.10	\$ 608.50
TEE														
687		1-1/4" Pipe Tee	EA	4	0%	4	\$ 41.50	\$ 166.00	0.889	3.56	\$ 56.00	\$ 49.78	\$ 199.14	\$ 365.14
688		3/4" Tee	EA	16	0%	16	\$ 14.25	\$ 228.00	0.667	10.67	\$ 56.00	\$ 37.35	\$ 597.63	\$ 825.63
		2" Pipe Tee	EA	5			\$ 100.00	\$ -	1.143	0.00	\$ 56.00			
GASS PIPE														
689		3/4" Gas Pipe	LF	200	10%	220	\$ 7.40	\$ 1,628.00	0.131	28.82	\$ 56.00	\$ 7.34	\$ 1,613.92	\$ 3,241.92
ELBOW														
690		3/4" Pipe Elbow	EA	3	10%	3	\$ 4.97	\$ 16.40	0.151	0.50	\$ 56.00	\$ 8.46	\$ 27.90	\$ 44.31
TEE														
691		3/4" Pipe Tee	EA	1	10%	1	\$ 17.00	\$ 18.70	0.889	0.98	\$ 56.00	\$ 49.78	\$ 54.76	\$ 73.46
VALVE														
692		Balancing Valve	EA	1	0%	1	\$ 189.00	\$ 189.00	0.660	0.66	\$ 56.00	\$ 36.96	\$ 36.96	\$ 225.96
693		Ball Valve	EA	56	0%	56	\$ 37.99	\$ 2,127.44	0.450	25.20	\$ 56.00	\$ 25.20	\$ 1,411.20	\$ 3,538.64
694		4" VTR	EA	3	0%	3	\$ 215.00	\$ 645.00	0.880	2.64	\$ 56.00	\$ 49.28	\$ 147.84	\$ 792.84
695		Plug Valve & Regulator	EA	3	0%	3	\$ 56.00	\$ 168.00	0.510	1.53	\$ 56.00	\$ 28.56	\$ 85.68	\$ 253.68
696		Gas Shut Off Valve	EA	1	0%	1	\$ 34.95	\$ 34.95	0.480	0.48	\$ 56.00	\$ 26.88	\$ 26.88	\$ 61.83
697		Gas Regulator	EA	2	0%	2	\$ 189.00	\$ 378.00	0.660	1.32	\$ 56.00	\$ 36.96	\$ 73.92	\$ 451.92
		HWC Balcing Valve	EA	6										
PLUMBING FIXTURE														
698		Floor Clean Out -MFR: JRSmith 4100-NB-FC-	EA	12	0%	12	\$ 261.54	\$ 3,138.48	0.800	9.60	\$ 56.00	\$ 44.80	\$ 537.60	\$ 3,676.08
699		D-1-4" Shower Drain -Joam 32100-TG Series -Smith 2120 Series -Wade 1310 Series -Watts FD-320-Y	EA	3	0%	3	\$ 133.00	\$ 399.00	0.680	2.04	\$ 56.00	\$ 38.08	\$ 114.24	\$ 513.24
700		D-3: 2" Shower Drain -Joam 300002-SAF-Z Series -Wade 1100-A-Fixxx-P-3 -Watts FD-100-A5-7 -Zurn ZD2254 Series -Cast Iron	EA	1	0%	1	\$ 83.00	\$ 83.00	0.650	0.65	\$ 56.00	\$ 36.40	\$ 36.40	\$ 119.40
701		4" HDPE Trench Drain -MFR: Zurn -Model: Z886-HDG	LF	60	0%	60	\$ 92.31	\$ 5,508.00	0.182	10.86	\$ 56.00	\$ 10.19	\$ 608.16	\$ 6,116.16
TANK														
702		ST-1: Domestic Water storage Tank -Tank Volume: 250 Gal	EA	1	0%	1	\$ 1,140.00	\$ 1,140.00	6.530	6.53	\$ 56.00	\$ 365.68	\$ 365.68	\$ 1,505.68
703		EXP-1: Expansion Tank	EA	2	0%	2	\$ 118.09	\$ 236.18	0.700	1.40	\$ 56.00	\$ 39.20	\$ 78.40	\$ 314.58
704		Propane Storage Tank -1200 Gallon	EA	1	0%	1	\$ 3,685.00	\$ 3,685.00	8.45	8.45	\$ 56.00	\$ 473.20	\$ 473.20	\$ 4,158.20
705		Dedicated Propane Feed To Generator From Propane Tank	EA	1	0%	1	\$ 560.00	\$ 560.00	3.00	3.00	\$ 56.00	\$ 168.00	\$ 168.00	\$ 728.00
706		1-1/2" Domestic Well	EA	1	0%	1	\$ 12,300.00	\$ 12,300.00	25.00	25.00	\$ 56.00	\$ 1,400.00	\$ 1,400.00	\$ 13,700.00
OIL SEPERATOR														
707		2" Oil Water Separator	EA	4	0%	4	\$ 5,775.00	\$ 23,100.00	10.800	43.20	\$ 56.00	\$ 604.80	\$ 2,419.20	\$ 25,519.20
PUMP														
708		RP-2: Pump -Pump Type : Inline -GPM: 7	EA	1	0%	1	\$ 217.32	\$ 217.32	1.560	1.56	\$ 56.00	\$ 87.36	\$ 87.36	\$ 304.68
709		RP-1: Pump -Pump Type : Inline -GPM: 7	EA	1	0%	1	\$ 217.32	\$ 217.32	1.560	1.56	\$ 56.00	\$ 87.36	\$ 87.36	\$ 304.68
710		BFP-1: Backflow Prevent -Size: 3/4" -Body Material: Bronze	EA	1	0%	1	\$ 635.99	\$ 635.99	2.190	2.19	\$ 56.00	\$ 122.64	\$ 122.64	\$ 758.63
WATER HEATER														
711		WH-1: Water Heater -Storage: 100 Gal -Recovery @ 105F Rise: 224GPH	EA	1	0%	1	\$ 4,370.00	\$ 4,370.00	6.550	6.55	\$ 56.00	\$ 366.80	\$ 366.80	\$ 4,736.80
SUBTOTAL														
DIV. 23 HVAC														
DUCTWORK														
712		56 X 12 Duct	LF	11	10%	12	\$ 31.00	\$ 365.89	0.250	2.95	\$ 56.00	\$ 14.00	\$ 165.24	\$ 531.14
713		8 X 4 Duct	LF	143	10%	157	\$ 5.18	\$ 814.42	0.082	12.89	\$ 56.00	\$ 4.59	\$ 721.97	\$ 1,536.38
714		8 X 6 Duct	LF	389	10%	428	\$ 5.40	\$ 2,312.74	0.085	36.40	\$ 56.00	\$ 4.76	\$ 2,038.64	\$ 4,351.38
715		10 X 6 Duct	LF	93	10%	103	\$ 6.00	\$ 615.12	0.088	9.02	\$ 56.00	\$ 4.93	\$ 505.22	\$ 1,120.34
716		10 X 8 Duct	LF	85	10%	93	\$ 6.11	\$ 568.33	0.090	8.37	\$ 56.00	\$ 5.04	\$ 468.80	\$ 1,037.13
717		2 X 10 Duct	LF	9	10%	10	\$ 4.00	\$ 40.30	0.065	0.65	\$ 56.00	\$ 3.64	\$ 36.68	\$ 76.98
718		14 X 10 Duct	LF	38	10%	42	\$ 8.90	\$ 371.92	0.100	4.18	\$ 56.00	\$ 5.60	\$ 234.02	\$ 605.94
719		12 X 8 Duct	LF	18	10%	19	\$ 7.70	\$ 148.56	0.093	1.79	\$ 56.00	\$ 5.21	\$ 100.48	\$ 240.05
720		22 X 10 Duct	LF	9	10%	10	\$ 18.99	\$ 193.22	0.180	1.83	\$ 56.00	\$ 10.08	\$ 102.56	\$ 295.79
721		16 X 10 Duct	LF	14	10%	15	\$ 13.00	\$ 199.77	0.120	1.84	\$ 56.00	\$ 6.72	\$ 103.27	\$ 303.04
722		12 X 8 Duct	LF	67	10%	74	\$ 7.70	\$ 567.74	0.093	6.86	\$ 56.00	\$ 5.21	\$ 384.00	\$ 951.75
723		18 X 10 Duct	LF	71	10%	79	\$ 15.11	\$ 1,186.74	0.138	10.84	\$ 56.00	\$ 7.73	\$ 606.96	\$ 1,793.70
724		20 X 10 Duct	LF	45	10%	50	\$ 16.70	\$ 834.55	0.156	7.80	\$ 56.00	\$ 8.74	\$ 436.56	\$ 1,271.11
725		10 X 10 Duct	LF	9	10%	9	\$ 6.79	\$ 63.70	0.090	0.85	\$ 56.00	\$ 5.04	\$ 47.35	\$ 111.13
726		4" Dia Duct	LF	32	10%	35	\$ 3.45	\$ 121.44	0.060	2.11	\$ 56.00	\$ 3.36	\$ 118.27	\$ 239.71
727		8" Dia Duct	LF	43	10%	47	\$ 4.55	\$ 215.52	0.072	3.41	\$ 56.00	\$ 4.03	\$ 190.98	\$ 406.50</

COST ESTIMATE BREAKDOWN

PROJECT ID:							TOTAL MATERIAL COST							\$ 1,226,736.19	
ADDRESS:							TOTAL LABOR COST							\$ 764,494.82	
SCOPE: GC							TOTAL TRADES COST							\$ 1,991,231.01	
DATE: 12-Aug-24							SALES TAX							7.75%	\$ 95,072.05
GROSS AREA: 10784							OVERHEAD & PROFIT							15.00%	\$ 298,684.65
PREPARED BY:							INSURANCE & BONDING							3.00%	\$ 59,736.93
							BID AMOUNT							\$ 2,444,724.65	
							TOTAL LABOR HOURS								
LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL UNIT COST	TOTAL COST	LABOR UNIT LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST	
734		AC-10: VRF System -CFM: 280 -Volt: 208 -Cooling MBH: 4.67 -Heating MBH: 4.78 -Model: Tane TPLFP005	EA	1	0%	1	\$ 2,848.00	\$ 2,848.00	7.000	7.00	\$ 56.00	\$ 392.00	\$ 392.00	\$ 3,240.00	
735		AC-9: VRF System -CFM: 315 -Volt: 208 -Cooling MBH: 7.47 -Heating MBH: 7.69 -Model: Tane TPLFP008	EA	1	0%	1	\$ 3,600.00	\$ 3,600.00	7.550	7.55	\$ 56.00	\$ 422.80	\$ 422.80	\$ 4,022.80	
736		AC-8: VRF System -CFM: 280 -Volt: 208 -Cooling MBH: 4.67 -Heating MBH: 4.78 -Model: Tane TPLFP005	EA	1	0%	1	\$ 2,848.00	\$ 2,848.00	7.000	7.00	\$ 56.00	\$ 392.00	\$ 392.00	\$ 3,240.00	
737		AC-7: VRF System -CFM: 280 -Volt: 208 -Cooling MBH: 11.2 -Heating MBH: 11.5 -Model: Tane TPLFP012	EA	1	0%	1	\$ 2,848.00	\$ 2,848.00	7.000	7.00	\$ 56.00	\$ 392.00	\$ 392.00	\$ 3,240.00	
738		AC-6: VRF System -CFM: 280 -Volt: 208 -Cooling MBH: 4.67 -Heating MBH: 4.78 -Model: Tane TPLFP012	EA	1	0%	1	\$ 2,848.00	\$ 2,848.00	7.000	7.00	\$ 56.00	\$ 392.00	\$ 392.00	\$ 3,240.00	
739		AC-5: VRF System -CFM: 280 -Volt: 208 -Cooling MBH: 4.67 -Heating MBH: 4.78 -Model: Tane TPLFP05	EA	1	0%	1	\$ 2,848.00	\$ 2,848.00	7.000	7.00	\$ 56.00	\$ 392.00	\$ 392.00	\$ 3,240.00	
740		AC-4: VRF System -CFM: 280 -Volt: 208 -Cooling MBH: 4.67 -Heating MBH: 4.78 -Model: Tane TPLFP05	EA	1	0%	1	\$ 2,848.00	\$ 2,848.00	7.000	7.00	\$ 56.00	\$ 392.00	\$ 392.00	\$ 3,240.00	
741		AC-3: VRF System -CFM: 280 -Volt: 208 -Cooling MBH: 4.67 -Heating MBH: 4.78 -Model: Tane TPLFP05	EA	1	0%	1	\$ 2,848.00	\$ 2,848.00	7.000	7.00	\$ 56.00	\$ 392.00	\$ 392.00	\$ 3,240.00	
742		AC-2: VRF System -CFM: 280 -Volt: 208 -Cooling MBH: 4.67 -Heating MBH: 4.78 -Model: Tane TPLFP05	EA	1	0%	1	\$ 2,848.00	\$ 2,848.00	7.000	7.00	\$ 56.00	\$ 392.00	\$ 392.00	\$ 3,240.00	
743		AC-12: VRF System -CFM: 600 -Volt: 208 -Cooling MBH: 11.2 -Heating MBH: 11.5 -Model: Tane TPLFP012	EA	1	0%	1	\$ 5,900.00	\$ 5,900.00	8.220	8.22	\$ 56.00	\$ 460.32	\$ 460.32	\$ 6,360.32	
744		AC-13: VRF System -CFM: 280 -Volt: 208 -Cooling MBH: 4.67 -Heating MBH: 4.78 -Model: Tane TPLFP005	EA	1	0%	1	\$ 2,848.00	\$ 2,848.00	7.000	7.00	\$ 56.00	\$ 392.00	\$ 392.00	\$ 3,240.00	
745		AC-15: Multi- Split Heat Pump Unit -CFM: 390 -Volt: 208 -Cooling MBH: 9.2 -Heating MBH: 9.2 -Model: Tane NTXWST09B112	EA	1	0%	1	\$ 3,899.00	\$ 3,899.00	7.600	7.60	\$ 56.00	\$ 425.60	\$ 425.60	\$ 4,324.60	
746		EF-2: 30 x 30 Mechanical Exhaust -CFM: 5850	EA	2	0%	2	\$ 2,066.00	\$ 4,132.00	4.330	8.66	\$ 56.00	\$ 242.48	\$ 484.96	\$ 4,616.96	
747		EF-2: Fan -CFM: 75 -RPM: 1009	EA	1	0%	1	\$ 180.00	\$ 180.00	2.000	2.00	\$ 56.00	\$ 112.00	\$ 112.00	\$ 292.00	
748		EF-3: Fan -CFM: 225 -RPM: 1384	EA	1	0%	1	\$ 276.00	\$ 276.00	2.330	2.33	\$ 56.00	\$ 130.48	\$ 130.48	\$ 406.48	
749		EF-4: Fan -CFM: 100 -RPM: 1683	EA	2	0%	2	\$ 199.00	\$ 398.00	2.000	4.00	\$ 56.00	\$ 112.00	\$ 224.00	\$ 622.00	
750		D: Transfer Exhaust -Make Price -Model: 630 -Material: Aluminum	EA	1	0%	1	\$ 232.98	\$ 232.98	2.500	2.50	\$ 56.00	\$ 140.00	\$ 140.00	\$ 372.98	
751		C: Transfer Exhaust -Make Price -Model: ASPD -Material: Aluminum	EA	3	0%	3	\$ 232.98	\$ 698.94	2.500	7.50	\$ 56.00	\$ 140.00	\$ 420.00	\$ 1,118.94	
752		Outdoor Intake Louver	EA	1	0%	1	\$ 128.91	\$ 128.91	0.800	0.80	\$ 56.00	\$ 44.80	\$ 44.80	\$ 173.71	
753		8 x 6 Toilet Exhaust -CFM: 75	EA	1	0%	1	\$ 180.00	\$ 180.00	2.000	2.00	\$ 56.00	\$ 112.00	\$ 112.00	\$ 292.00	
754		DIFFUSER Ceiling Diffuser	EA	12	0%	12	\$ 65.00	\$ 780.00	0.650	7.80	\$ 56.00	\$ 36.40	\$ 436.80	\$ 1,216.80	
755		CONTROLLER: VRF Central Controller	EA	1	0%	1	\$ 668.27	\$ 668.27	1.300	1.30	\$ 56.00	\$ 72.80	\$ 72.80	\$ 741.07	
756		RTU-1 Controller	EA	1	0%	1	\$ 552.00	\$ 552.00	1.000	1.00	\$ 56.00	\$ 56.00	\$ 56.00	\$ 608.00	
757		Vehicle Exhaust Controller	EA	1	0%	1	\$ 180.00	\$ 180.00	1.000	1.00	\$ 56.00	\$ 56.00	\$ 56.00	\$ 236.00	
758		DUCT CONNECTION 6" Deep Plenum Box	EA	1	0%	1	\$ 451.61	\$ 451.61	1.660	1.66	\$ 56.00	\$ 92.96	\$ 92.96	\$ 544.57	
759		20 x 10 Supply Duct Connect To Existing 20 x 10 Duct	EA	1	0%	1	\$ 63.00	\$ 63.00	0.480	0.48	\$ 56.00	\$ 26.88	\$ 26.88	\$ 89.88	
760		18 x 10 Supply Duct Connect To Existing 20 x 18 Duct	EA	6	0%	6	\$ 63.00	\$ 378.00	0.180	1.08	\$ 56.00	\$ 10.08	\$ 60.48	\$ 438.48	
761		AIR GRILL Exhaust Grill	EA	5	0%	5	\$ 81.00	\$ 405.00	0.680	3.40	\$ 56.00	\$ 38.08	\$ 190.40	\$ 595.40	
762		HEATER UH-1: Unit Heater -CFM: 1340 -MBH: 34.3	EA	1	0%	1	\$ 2,054.00	\$ 2,054.00	5.000	5.00	\$ 56.00	\$ 280.00	\$ 280.00	\$ 2,334.00	
763		UH-2: Unit Heater -CFM: 1340 -MBH: 34.3	EA	1	0%	1	\$ 2,054.00	\$ 2,054.00	5.000	5.00	\$ 56.00	\$ 280.00	\$ 280.00	\$ 2,334.00	
764		Temperature Sensor	EA	1	0%	1	\$ 81.00	\$ 81.00	0.880	0.88	\$ 56.00	\$ 49.28	\$ 49.28	\$ 130.28	
765		Tailpipe Exhaust Fan Control Panel	EA	1	0%	1	\$ 334.00	\$ 334.00	1.000	1.00	\$ 56.00	\$ 56.00	\$ 56.00	\$ 390.00	
766		PANEL Boiler Gas Panel	EA	1	0%	1	\$ 355.00	\$ 355.00	1.400	1.40	\$ 56.00	\$ 78.40	\$ 78.40	\$ 433.40	
		PUMP													

COST ESTIMATE BREAKDOWN

PROJECT ID:		TOTAL MATERIAL COST		\$ 1,226,736.19
ADDRESS:		TOTAL LABOR COST		\$ 764,494.82
SCOPE: GC		TOTAL TRADES COST		\$ 1,991,231.01
DATE: 12-Aug-24		SALES TAX	7.75%	\$ 95,072.05
GROSS AREA: 10784		OVERHEAD & PROFIT	15.00%	\$ 298,684.65
PREPARED BY:		INSURANCE & BONDING	3.00%	\$ 59,736.93
		BID AMOUNT		\$ 2,444,724.65
		TOTAL LABOR HOURS		

LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL UNIT COST	TOTAL COST	LABOR UNIT LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
767		P-3: Pump -Radiant Floor Pump -GPM: 6	EA	2	0%	2	\$ 1,300.00	\$ 2,600.00	3.880	7.76	\$ 56.00	\$ 217.28	\$ 434.56	\$ 3,034.56
768		P-2: Pump -Hot Water Secondary Pump -GPM: 14	EA	1	0%	1	\$ 2,100.00	\$ 2,100.00	5.000	5.00	\$ 56.00	\$ 280.00	\$ 280.00	\$ 2,380.00
769		RM-1: Radiant Floor System -Model: Watts Radiant Pex-AL	EA	1	0%	1	\$ 450.95	\$ 450.95	2.000	2.00	\$ 56.00	\$ 112.00	\$ 112.00	\$ 562.95
		ROOF TOP UNIT												
770		ACCU-2: Air Cooled Condensing Unit	EA	2	0%	2	\$ 1,800.00	\$ 3,600.00	4.330	8.66	\$ 56.00	\$ 242.48	\$ 484.96	\$ 4,084.96
771		RTU-: Roof Top Unit -EA OUT CFM: 800 -OA In CFM: 800 -EXT SP: 1.00" Per Fan	EA	2	0%	2	\$ 3,620.00	\$ 7,240.00	5.110	10.22	\$ 56.00	\$ 286.16	\$ 572.32	\$ 7,812.32
		MISC.												
772		Mount Fan On Equipment Rail	EA	1	0%	1	\$ -	\$ -	2.000	2.00	\$ 56.00	\$ 112.00	\$ 112.00	\$ 112.00
773		Reconnect Controls & Refrigerant Pipe	EA	1	0%	1	\$ -	\$ -	1.000	1.00	\$ 56.00	\$ 56.00	\$ 56.00	\$ 56.00
		TANK & BOILER												
774		ET-1: Expansion Tank -MFR: Bell & Gossett -Model: B50	EA	1	0%	1	\$ 1,548.00	\$ 1,548.00	1.660	1.66	\$ 56.00	\$ 92.96	\$ 92.96	\$ 1,640.96
775		B-1: Boiler -Type: Condensing -Input MBH: 110 -Net MBH: 89 -Doe MBH: 102 -Fuel: Propane	EA	1	0%	1	\$ 2,132.00	\$ 2,132.00	5.220	5.22	\$ 56.00	\$ 292.32	\$ 292.32	\$ 2,424.32
		DUCT HANGING												
776		Allowance For Duct Hanging (10730 SF)	LS	1	0%	1	\$ -	\$ -	0.000	0.00	\$ 56.00	\$ -	\$ 8,000.00	\$ 8,000.00

DIV. 26	ELECTRICAL						SUBTOTAL	\$ 138,394.30	79.58				\$ 55,234.34	\$ 193,628.64
	CONDUIT AND CONDUCTORS													
777		Allowance For Wiring, Conduit & Conductor (10784 SF)	LS	1	0%	1	\$ -	\$ 42,000.00	0.000	0.00	\$ 56.00	\$ -	\$ 31,000.00	\$ 73,000.00
	LIGHT													
778		Call For Aid Emergency Light	EA	5	0%	5	\$ 260.00	\$ 1,300.00	1.000	5.00	\$ 56.00	\$ 56.00	\$ 280.00	\$ 1,580.00
779		52: Light Fixture	EA	33	0%	33	\$ 65.00	\$ 2,145.00	0.640	21.12	\$ 56.00	\$ 35.84	\$ 1,182.72	\$ 3,327.72
780		LED Lamp	EA	16	0%	16	\$ 79.00	\$ 1,264.00	0.400	6.40	\$ 56.00	\$ 22.40	\$ 358.40	\$ 1,622.40
781		E: Light -Lamp: 41W LED -Volt: 120V -Lumens: 3800 LM	EA	9	0%	9	\$ 239.17	\$ 2,152.53	1.330	11.97	\$ 56.00	\$ 74.48	\$ 670.32	\$ 2,822.85
782		K: Light -Lamp: 20W LED -Volt: 120V/277V -Lumens: 1633 LM	EA	22	0%	22	\$ 155.00	\$ 3,410.00	1.100	24.20	\$ 56.00	\$ 61.60	\$ 1,355.20	\$ 4,765.20
783		K-1: Light -Lamp: 26W LED -Volt: 120V/277V -Lumens: 2134 LM	EA	6	0%	6	\$ 155.00	\$ 930.00	1.100	6.60	\$ 56.00	\$ 61.60	\$ 369.60	\$ 1,299.60
784		K-2: Light -Lamp: 8W LED -Volt: 120V/277V -Lumens: 598 LM	EA	10	0%	10	\$ 155.00	\$ 1,550.00	1.100	11.00	\$ 56.00	\$ 61.60	\$ 616.00	\$ 2,166.00
785		A8-A: Light -Lamp: 84W LED -Voltage: 120/277V -Lumens: 9714LM	EA	11	0%	11	\$ 239.17	\$ 2,630.87	1.330	14.63	\$ 56.00	\$ 74.48	\$ 819.28	\$ 3,450.15
786		A8-B: Light -Lamp: 49W LED -Voltage: 120/277V -Lumens: 6181LM	EA	2	0%	2	\$ 330.00	\$ 660.00	1.330	2.66	\$ 56.00	\$ 74.48	\$ 148.96	\$ 808.96
787		A4: Light -Lamp: 42W LED -Voltage: 120/277V -F-3: Light	EA	3	0%	3	\$ 155.00	\$ 465.00	1.100	3.30	\$ 56.00	\$ 61.60	\$ 184.80	\$ 649.80
788		-Lamp: 16W LED -Voltage: 120/277V -Lumens: 1503 LM	EA	6	0%	6	\$ 155.00	\$ 930.00	1.100	6.60	\$ 56.00	\$ 61.60	\$ 369.60	\$ 1,299.60
789		F1-4: Light -Lamp: 12W LED -Voltage: 120/277V -Lumens: 1401 LM	EA	26	0%	26	\$ 155.00	\$ 4,030.00	1.100	28.60	\$ 56.00	\$ 61.60	\$ 1,601.60	\$ 5,631.60
790		S-1: Light -Lamp: 46 W LED -Voltage: 120/277V -Lumens: 2769 LM	EA	4	0%	4	\$ 330.00	\$ 1,320.00	1.330	5.32	\$ 56.00	\$ 74.48	\$ 297.92	\$ 1,617.92
791		B-2: Light -Lamp: 21 W LED -Voltage: 120/277V -Lumens: 2588 LM	EA	17	0%	17	\$ 155.00	\$ 2,635.00	1.100	18.70	\$ 56.00	\$ 61.60	\$ 1,047.20	\$ 3,682.20
792		D: Light -Lamp: 10 W LED -Voltage: 120/277V -Lumens: 1503 LM	EA	2	0%	2	\$ 155.00	\$ 310.00	1.100	2.20	\$ 56.00	\$ 61.60	\$ 123.20	\$ 433.20
793		M-4: Light -46W LED -Voltage: 120/277V -Lumens 5000LM	EA	4	0%	4	\$ 155.00	\$ 620.00	1.100	4.40	\$ 56.00	\$ 61.60	\$ 246.40	\$ 866.40
794		C: Light -10W LED -Voltage: 120/277 V	EA	10	0%	10	\$ 155.00	\$ 1,550.00	1.100	11.00	\$ 56.00	\$ 61.60	\$ 616.00	\$ 2,166.00
795		Q-4: Light -2W LED -Voltage: 120/277V -Lumens: 20LM	EA	4	0%	4	\$ 155.00	\$ 620.00	1.100	4.40	\$ 56.00	\$ 61.60	\$ 246.40	\$ 866.40
796		G: Light -9W LED -Voltage: 120/277V -Lumens: 844LM	EA	7	0%	7	\$ 155.00	\$ 1,085.00	1.100	7.70	\$ 56.00	\$ 61.60	\$ 431.20	\$ 1,516.20
797		J: Light -Lamp: 9W LED -Voltage: 120/277V -Lumens: 1473LM	EA	20	0%	20	\$ 155.00	\$ 3,100.00	1.100	22.00	\$ 56.00	\$ 61.60	\$ 1,232.00	\$ 4,332.00
798		N-4: Light -Lamp: 22W LED -Voltage: 120/277V -Lumens: 2772LM	EA	40	0%	40	\$ 155.00	\$ 6,200.00	1.100	44.00	\$ 56.00	\$ 61.60	\$ 2,464.00	\$ 8,664.00
799		TH: 10W LED Strip Light	LF	19	0%	19	\$ 38.00	\$ 710.22	0.400	7.48	\$ 56.00	\$ 22.40	\$ 418.66	\$ 1,128.88
800		A-B: 49W LED	EA	4	0%	4	\$ 108.00	\$ 432.00	0.950	3.80	\$ 56.00	\$ 53.20	\$ 212.80	\$ 644.80
	RECEPTACLE													
801		Ground Fault Interrupting Receptacle	EA	62	0%	62	\$ 27.00	\$ 1,674.00	0.300	18.60	\$ 56.00	\$ 16.80	\$ 1,041.60	\$ 2,715.60
802		Duplex Television Receptacle	EA	17	0%	17	\$ 19.00	\$ 323.00	0.300	5.10	\$ 56.00	\$ 16.80	\$ 285.60	\$ 608.60
803		Half Switched Duplex Receptacle	EA	42	0%	42	\$ 19.00	\$ 798.00	0.300	12.60	\$ 56.00	\$ 16.80	\$ 705.60	\$ 1,503.60
804		Duplex Ground Fault Interrupting Receptacle	EA	18	0%	18	\$ 27.00	\$ 486.00	0.300	5.40	\$ 56.00	\$ 16.80	\$ 302.40	\$ 788.40
805		(2) Half Switch Duplex Receptacles	EA	3	0%	3	\$ 19.00	\$ 57.00	0.300	0.90	\$ 56.00	\$ 16.80	\$ 50.40	\$ 107.40
806		Special Configuration Receptacle -Nemco Configuration	EA	4	0%	4	\$ 23.00	\$ 92.00	0.300	1.20	\$ 56.00	\$ 16.80	\$ 67.20	\$ 159.20

COST ESTIMATE BREAKDOWN

PROJECT ID:		TOTAL MATERIAL COST		\$ 1,226,736.19
ADDRESS:		TOTAL LABOR COST		\$ 764,494.82
SCOPE: GC		TOTAL TRADES COST		\$ 1,991,231.01
DATE: 12-Aug-24		SALES TAX	7.75%	\$ 95,072.05
GROSS AREA: 10784		OVERHEAD & PROFIT	15.00%	\$ 298,684.65
PREPARED BY:		INSURANCE & BONDING	3.00%	\$ 59,736.93
		BID AMOUNT		\$ 2,444,724.65
		TOTAL LABOR HOURS		

LINE NO.	CSI DIVISION	ITEM DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY	MATERIAL UNIT COST	TOTAL COST	LABOR UNIT LABOR HOUR	LABOR HOUR	LABOR RATE	UNIT PRICE	TOTAL COST	SUB COST
807		Ceiling Cord Reel W/ -Duplex Or Quad Receptacle	EA	3	0%	3	\$ 38.00	\$ 114.00	0.330	0.99	\$ 56.00	\$ 18.48	\$ 55.44	\$ 169.44
		ELECTRIC PANEL												
808		Fire Alarm Control Panel	EA	2	0%	2	\$ 1,600.00	\$ 3,200.00	3.550	7.10	\$ 56.00	\$ 198.80	\$ 397.60	\$ 3,597.60
809		Low Voltage Control Station W/ Preset Scenes	EA	12	0%	12	\$ 85.39	\$ 1,024.68	0.500	6.00	\$ 56.00	\$ 28.00	\$ 336.00	\$ 1,360.68
810		P-2: Panel, 208/120V, 3Ph, 4W, 42000AIC Floor Mounted	EA	1	0%	1	\$ 3,800.00	\$ 3,800.00	6.880	6.88	\$ 56.00	\$ 385.28	\$ 385.28	\$ 4,185.28
811		20AMP Breaker	EA	14	0%	14	\$ 65.00	\$ 910.00	0.450	6.30	\$ 56.00	\$ 25.20	\$ 352.80	\$ 1,262.80
812		MD: Panel 208/120V, 3P, 4W, 42000AIC	EA	2	0%	2	\$ 3,800.00	\$ 7,600.00	6.880	13.76	\$ 56.00	\$ 385.28	\$ 770.56	\$ 8,370.56
813		20AMP Breaker	EA	23	0%	23	\$ 65.00	\$ 1,495.00	0.450	10.35	\$ 56.00	\$ 25.20	\$ 579.60	\$ 2,074.60
814		20AMP Breaker	EA	3	0%	3	\$ 83.00	\$ 249.00	0.620	1.86	\$ 56.00	\$ 34.72	\$ 104.16	\$ 353.16
		Boiler Gas Alarm Panel	EA	1										
		SWITCH												
815		Dimmer Switch	EA	11	0%	11	\$ 23.00	\$ 253.00	0.220	2.42	\$ 56.00	\$ 12.32	\$ 135.52	\$ 388.52
816		Single Pole Switch	EA	4	0%	4	\$ 15.87	\$ 60.00	0.220	0.88	\$ 56.00	\$ 12.32	\$ 49.28	\$ 109.28
817		Three Way Switch	EA	2	0%	2	\$ 18.00	\$ 36.00	0.220	0.44	\$ 56.00	\$ 12.32	\$ 24.64	\$ 60.64
818		Occupancy Sensor Switch	EA	6	0%	6	\$ 33.00	\$ 198.00	0.250	1.50	\$ 56.00	\$ 14.00	\$ 84.00	\$ 282.00
819		Low Voltage Switch	EA	5	0%	5	\$ 15.00	\$ 75.00	0.220	1.10	\$ 56.00	\$ 12.32	\$ 61.60	\$ 136.60
820		SM-2: Disconnect Switch -Toggle Type -Motor Rated -1Hp, 20A, 2P	EA	21	0%	21	\$ 211.00	\$ 4,431.00	0.800	16.80	\$ 56.00	\$ 44.80	\$ 940.80	\$ 5,371.80
821		Non Fused Disconnect Switch	EA	7	0%	7	\$ 163.00	\$ 1,141.00	0.800	5.60	\$ 56.00	\$ 44.80	\$ 313.60	\$ 1,454.60
822		Call For Aid Switch	EA	5	0%	5	\$ 46.00	\$ 230.00	0.280	1.40	\$ 56.00	\$ 15.68	\$ 78.40	\$ 308.40
823		Single pole Illuminated Switch	EA	3	0%	3	\$ 27.00	\$ 81.00	0.250	0.75	\$ 56.00	\$ 14.00	\$ 42.00	\$ 123.00
824		Vacancy Sensor Switch	EA	5	0%	5	\$ 33.00	\$ 165.00	0.250	1.25	\$ 56.00	\$ 14.00	\$ 70.00	\$ 235.00
825		Flow Switch	EA	1	0%	1	\$ 62.00	\$ 62.00	0.250	0.25	\$ 56.00	\$ 14.00	\$ 14.00	\$ 76.00
826		Temperature Switch	EA	1	0%	1	\$ 45.00	\$ 45.00	0.250	0.25	\$ 56.00	\$ 14.00	\$ 14.00	\$ 59.00
		MISC.												
827		Propane Fired Generator -527 MBH	EA	1	0%	1	\$ 27,745.00	\$ 27,745.00	30.00	30.00	\$ 56.00	\$ 1,680.00	\$ 1,680.00	\$ 29,425.00

DIV. 28		ELECTRONIC SAFETY & SECURITY					SUBTOTAL	\$ 41,117.26	9.80				\$ 18,705.04	\$ 59,822.30
		THERMOSTATE & ALARM												
828		Thermostat	EA	17	0%	17	\$ 81.00	\$ 1,377.00	0.660	11.22	\$ 56.00	\$ 36.96	\$ 628.32	\$ 2,005.32
829		Fire Alarm Horn/ Strobe	EA	9	0%	9	\$ 75.87	\$ 682.83	0.600	5.40	\$ 56.00	\$ 33.60	\$ 302.40	\$ 985.23
830		Fire Alarm Strobe Light	EA	15	0%	15	\$ 75.87	\$ 1,138.05	0.600	9.00	\$ 56.00	\$ 33.60	\$ 504.00	\$ 1,642.05
831		Sound Masking System Loudspeaker	EA	45	0%	45	\$ 299.00	\$ 13,455.00	0.520	23.40	\$ 56.00	\$ 29.12	\$ 1,310.40	\$ 14,765.40
832		Door Bell	EA	2	0%	2	\$ 59.00	\$ 118.00	0.380	0.76	\$ 56.00	\$ 21.28	\$ 42.56	\$ 160.56
833		Intercom Style Speaker	EA	27	0%	27	\$ 84.00	\$ 2,268.00	0.820	22.14	\$ 56.00	\$ 45.92	\$ 1,239.84	\$ 3,507.84
		SENSOR												
834		Smoke Detector	EA	7	0%	7	\$ 56.00	\$ 392.00	0.500	3.50	\$ 56.00	\$ 28.00	\$ 196.00	\$ 588.00
835		Combination Smoke & Carbon Monoxide Detector W/ -Sound Base	EA	7	0%	7	\$ 67.00	\$ 469.00	0.500	3.50	\$ 56.00	\$ 28.00	\$ 196.00	\$ 665.00
836		YS: Ceiling Mounted Dual Technology 360 Degree Vacancy	EA	12	0%	12	\$ 87.00	\$ 1,044.00	0.500	6.00	\$ 56.00	\$ 28.00	\$ 336.00	\$ 1,380.00
837		OS: Ceiling Mounted Dual Technology 360 Degree Vacancy	EA	7	0%	7	\$ 87.00	\$ 609.00	0.500	3.50	\$ 56.00	\$ 28.00	\$ 196.00	\$ 805.00
		LOCK & CAMERA												
838		Card Reader Outlet	EA	5	0%	5	\$ 50.20	\$ 251.00	0.280	1.40	\$ 56.00	\$ 15.68	\$ 78.40	\$ 329.40
839		Door Contact	EA	8	0%	8	\$ 43.44	\$ 347.52	0.330	2.64	\$ 56.00	\$ 18.48	\$ 147.84	\$ 495.36
840		Electrified Lock	EA	5	0%	5	\$ 205.10	\$ 1,025.50	0.850	4.25	\$ 56.00	\$ 47.60	\$ 238.00	\$ 1,263.50
841		Multi Lens Camera	EA	12	0%	12	\$ 299.00	\$ 3,588.00	1.560	18.72	\$ 56.00	\$ 87.36	\$ 1,048.32	\$ 4,636.32
		MISC.												
842		Vol: Volume Control Knob (Intercom System)	EA	20	0%	20	\$ 14.00	\$ 280.00	0.220	4.40	\$ 56.00	\$ 12.32	\$ 246.40	\$ 526.40
843		AVD: AV Display Outlet	EA	18	0%	18	\$ 11.33	\$ 203.94	0.180	3.24	\$ 56.00	\$ 10.08	\$ 181.44	\$ 385.38
844		Combination Outlet	EA	29	0%	29	\$ 11.33	\$ 328.57	0.180	5.22	\$ 56.00	\$ 10.08	\$ 292.32	\$ 620.89
		SPRINKLER												
845		Pendent Sprinkler Head -Style: Concesled Flat Plate -Color: Brass -Discharge Coefficient: 4.9K	EA	15	0%	15	\$ 35.99	\$ 539.85	0.620	9.30	\$ 56.00	\$ 34.72	\$ 520.80	\$ 1,060.65
		WIRING												
846		Allowance For IT Wiring & Conduit (10730 SF)	LS	1	0%	1	\$ -	\$ 13,000.00	0.000	0.00	\$ 56.00	\$ -	\$ 11,000.00	\$ 24,000.00

DIV. 31		EARTHWORK					SUBTOTAL	\$ 5,314.39	5.33				\$ 2,533.16	\$ 7,847.56
		LANDSCAPING												
		TREE												
847		Khanzan Japanese Cherry -Size: 6"-8" H.	EA	3	10%	3	\$ 574.99	\$ 1,897.47	4.110	13.56	\$ 42.00	\$ 172.62	\$ 569.65	\$ 2,467.11
		SEDIMENT CONTROLL												
848		Silt Fence	LF	453	10%	499	\$ 1.26	\$ 628.15	0.030	14.96	\$ 42.00	\$ 1.26	\$ 628.15	\$ 1,256.30
849		Stabilize Construction	SF	1198	10%	1317	\$ 1.88	\$ 2,476.78	0.022	28.98	\$ 42.00	\$ 0.92	\$ 1,217.31	\$ 3,694.09
850		PEA Stone Mulch	SF	94	10%	103	\$ 1.22	\$ 125.73	0.015	1.55	\$ 42.00	\$ 0.63	\$ 64.93	\$ 190.66
851		2' x 2' Sediment Controll System	EA	1	10%	1	\$ 169.33	\$ 186.26	1.150	1.27	\$ 42.00	\$ 48.30	\$ 53.13	\$ 239.39

DIV. 32		SITE IMPROVEMENT					SUBTOTAL	\$ 68,978.44	37.31				\$ 40,000.85	\$ 108,979.29
		PAVEMENT												
		TREE												
852		Concrete Side Walk	SF	2491										
853		Concrete	CY	46	10%	51	\$ 195.00	\$ 9,895.56	2.180	110.63	\$ 60.00	\$ 130.80	\$ 6,637.64	\$ 16,533.20
		4" Compacted Sub Base	CY	30	10%	33	\$ 38.99	\$ 1,305.88	0.860	28.80	\$ 42.00	\$ 36.12	\$ 1,209.76	\$ 2,515.63
		Concrete Pad												
854		Concrete	CY	6	10%	6	\$ 195.00	\$ 1,235.40	2.180	13.81	\$ 60.00	\$ 130.80	\$ 828.67	\$ 2,064.07
855		4" Compacted Sub Base	CY	4	10%	4	\$ 38.99	\$ 163.03	0.860	3.60	\$ 42.00	\$ 36.12	\$ 151.03	\$ 314.06
		Bit Conc. Driveway												
856		2" Thick Concrete Bitumen	CY	96	10%	105	\$ 90.00	\$ 9,479.88	1.250	131.66	\$ 60.00	\$ 75.00	\$ 7,899.90	\$ 17,379.78
857		6" Compacted Sub Base	CY	282	10%	310	\$ 38.99	\$ 12,079.10	0.860	266.43	\$ 42.00	\$ 36.12	\$ 11,189.97	\$ 23,269.07
		CONCRETE CURB & STRIPPING												
858		Concrete Curb	LF	689	10%	758	\$ 13.68	\$ 10,364.61	0.085	64.40	\$ 60.00	\$ 5.10	\$ 3,864.00	\$ 14,228.61
859		4" Pavement Marking Stripping -Color: White	LF	482	10%	530	\$ 0.62	\$ 328.74	0.018	9.54	\$ 42.00	\$ 0.76	\$ 400.86	\$ 729.60
		SIGNAGE & RETAINING WALL												
860		ADA Pavement Marking Symbol	EA	2	0%	2	\$ 27.00	\$ 54.00	0.520	1.04	\$ 42.00	\$ 21.84	\$ 43.68	\$ 97.68
861		7'-0" H. Pavement Sign W/ -Post	EA	2	0%	2	\$ 436.55	\$ 873.10	3.000	6.00	\$ 42.00	\$ 126.00	\$ 252.00	\$ 1,125.10
862		Concrete	CY	0.17	10%	0.19	\$ 195.00	\$ 37.44	2.780	0.53	\$ 60.00	\$ 166.80	\$ 32.02	\$ 69.46
863		Excavation	CY	0.17	10%	0.19	\$ -	\$ -	1.100	0.21	\$ 42.00	\$ 46.20	\$ 8.87	\$ 8.87
864		Boillard	EA	5	0%	5	\$ 540.00	\$ 2,700.00	3.000	15.00	\$ 42.00	\$ 126.00	\$ 630.00	\$ 3,330.00
865		Concrete	CY	0.44	10%	0.48	\$ 195.00	\$ 93.59	2.780	1.33	\$ 60.00	\$ 80.06	\$ 80.06	\$ 173.65
866		Excavation	CY	0.44	10%	0.48	\$ -	\$ -	1.100	0.53	\$ 42.00	\$ 46.20	\$ 22.17	\$ 22.17
867		Site Light	EA	4	0%	4	\$ 2,600.00	\$ 10,400.00	5.880	23.52	\$ 42.00	\$ 246.96	\$ 987.84	\$ 11,387.84

PROJECT ID:		TOTAL MATERIAL COST		\$ 1,226,736.19
ADDRESS:		TOTAL LABOR COST		\$ 764,494.82
SCOPE:	GC	TOTAL TRADES COST		\$ 1,991,231.01
DATE:	12-Aug-24	SALES TAX	7.75%	\$ 95,072.05
GROSS AREA:	10784	OVERHEAD & PROFIT	15.00%	\$ 298,684.65
PREPARED BY:		INSURANCE & BONDING	3.00%	\$ 59,736.93
		BID AMOUNT		\$ 2,444,724.65
		TOTAL LABOR HOURS		

[illegible]

DIV. 33		UTILITY					SUBTOTAL		\$ 117,978.45	114.39					\$ 15,785.26	133,763.71				
		MISC.																		
875		Electrical Transfer	EA	1	10%	1	\$	20,600.00	\$	22,660.00	33.00	36.30	\$	56.00	\$	1,848.00	\$	2,032.80	\$	24,692.80
876		Septic Valley Unit	EA	3	10%	3	\$	13,999.00	\$	46,196.70	21.00	69.30	\$	56.00	\$	1,176.00	\$	3,830.80	\$	50,077.50
877		Concrete Holding Tank	EA	1	10%	1	\$	11,000.00	\$	12,100.00	18.60	20.53	\$	56.00	\$	1,044.96	\$	1,149.46	\$	13,249.46
878		Oil Water Separator	EA	1	10%	1	\$	5,652.00	\$	6,217.20	10.53	11.61	\$	56.00	\$	590.80	\$	649.88	\$	6,867.08
879		24" Varden Drain	EA	4	10%	4	\$	414.80	\$	1,825.12	2.00	8.80	\$	56.00	\$	1,120.00	\$	492.80	\$	2,317.92
		PIPE																		
880		6" Dia HDPE Pipe	LF	52	10%	57	\$	23.11	\$	1,313.25	0.10	5.68	\$	56.00	\$	5.60	\$	318.23	\$	1,631.47
881		Excavation	CY	6	10%	6	\$	-	\$	-	1.10	6.20	\$	42.00	\$	46.20	\$	291.71	\$	291.71
		Backfill	CY	5	10%	6	\$	-	\$	-	0.785	4.63	\$	42.00	\$	32.97	\$	194.55	\$	194.55
883		12" Dia CPE Pipe	LF	217	10%	239	\$	58.69	\$	13,997.68	0.185	44.12	\$	56.00	\$	10.36	\$	2,470.88	\$	16,468.56
884		Excavation	CY	11	10%	12	\$	-	\$	-	1.10	12.92	\$	42.00	\$	46.20	\$	542.78	\$	542.78
885		Backfill	CY	4	10%	5	\$	-	\$	-	0.785	3.78	\$	42.00	\$	32.97	\$	158.61	\$	158.61
886		8" Dia HDPE Pipe	LF	31	10%	34	\$	39.88	\$	1,348.50	0.136	4.60	\$	56.00	\$	7.62	\$	257.53	\$	1,606.03
887		Excavation	CY	2	10%	2	\$	-	\$	-	1.10	1.83	\$	42.00	\$	46.20	\$	76.95	\$	76.95
888		Backfill	CY	1	10%	1	\$	-	\$	-	0.785	0.96	\$	42.00	\$	32.97	\$	40.49	\$	40.49
889		5" Dia Mune Hole 7'0" H	EA	2	10%	2	\$	5,600.00	\$	12,320.00	22.00	48.40	\$	56.00	\$	1,232.00	\$	2,710.40	\$	15,030.40
890		Excavation	CY	10	10%	11	\$	-	\$	-	1.10	12.32	\$	42.00	\$	46.20	\$	517.40	\$	517.40

Note:

1. Online sources are used for pricing