


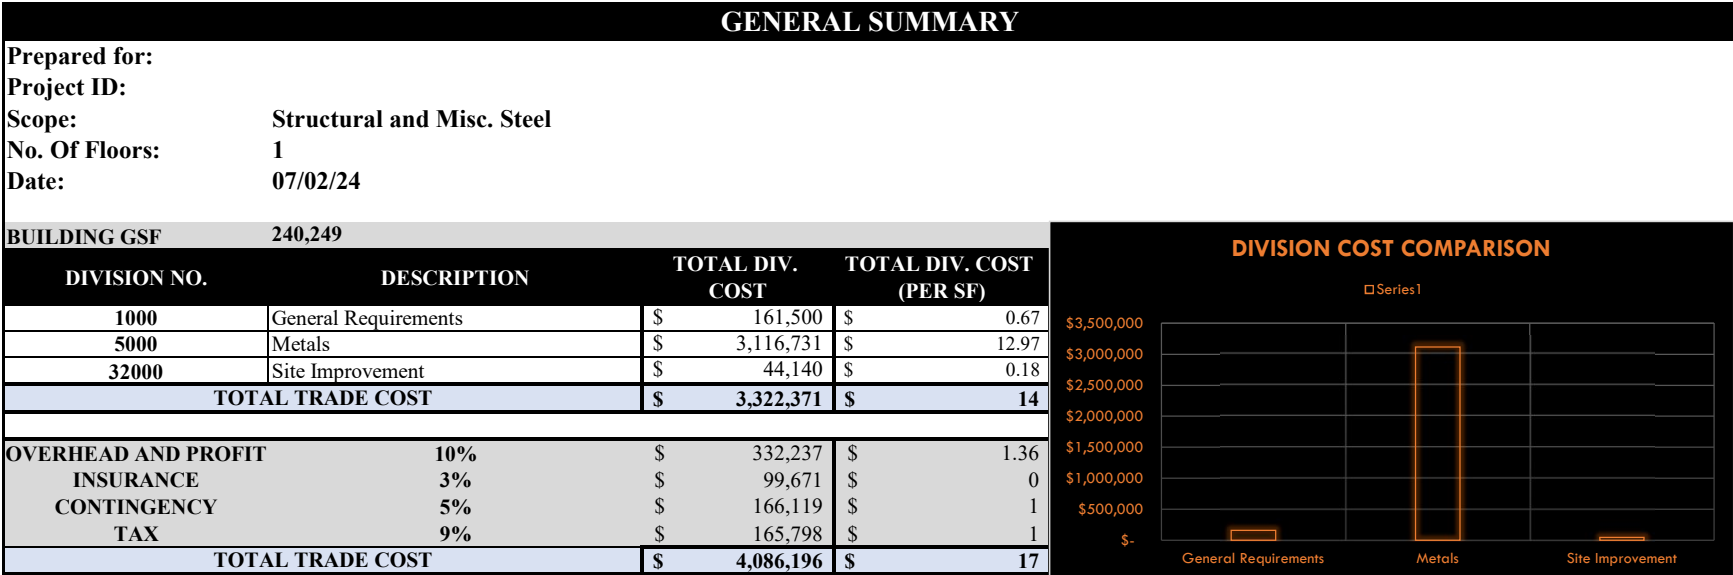

DETAILED BREAKDOWN OF ITEMS															
Prepared for: Project ID: Scope: Structural and Misc. Steel										TOTAL TRADE COS		\$3,322,371			
										OH & PROFIT		\$332,237			
										INSURANCE		\$99,671			
										CONTINGENCY		\$166,119			
										TAX		\$165,798			
										SUGGESTED BID		\$4,086,196			
Date: 07/02/24															
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTIT Y	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST		
GENERAL REQUIREMENTS															
1			Permits	LS	1	0%	1	0.00	0.00	\$ -	\$ -		\$ -		
2			Supervision and Coordination	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 52,000.00	\$ 52,000.00		
3			Submittals and Shop drawings	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 6,000.00	\$ 6,000.00		
4			Final Cleaning	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 8,000.00	\$ 8,000.00		
5			Mobilization Costs	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 80,000.00	\$ 80,000.00		
6			Temporary Control & Facilities	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 11,500.00	\$ 11,500.00		
7			Scaffolding	LS	1	0%	1	0.00	0.00	\$ -	\$ -	\$ 4,000.00	\$ 4,000		
												SUBTOTAL		\$ 161,500	
METALS															
			FIRST FLOOR												
	S1.01A-S1.01F		METAL COLUMN:												
8			C3: W 14x550 (40'-8" H) 4EA	LBS	89467	10%	98414	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 216,511		
			HSS COLUMN:												
9			C1: HSS 12x12x1/2" (40'-8" H) 43 EA	LBS	133022	10%	146324	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 321,914		
10			C2: HSS 12x12x5/8" (40'-8" H) 7 EA	LBS	26571	10%	29228	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 64,302		
				BASE & CAP PLATE :											
11			20"x20"x1/4" Base Plate (50 EA)	LBS	1417	10%	1559	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 3,430		
12			22"x31"x2" Base Plate (4EA)	LBS	1541	10%	1695	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 3,729		
13			20"x20"x1" Cap Plate (50 EA)	LBS	5669	10%	6236	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 13,719		
14			10x10x1/4" Cap Plate (12 EA)	LBS	84	10%	93	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 204		
15			4x4x5/8" Washer Plate (16 EA)	LBS	44	10%	49	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 108		
16			3x3x3/8" Washer Plate (200 EA)	LBS	191	10%	210	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 463		
				BOLTS:											
17		1-1/2" Dia F1554 Anchor Bolt @ 1'10" L	EA	16	0%	16	0.080	\$ 60.00	\$ 3.90	\$ 4.42	\$ 8.32	\$ 133			
18		1" Dia F1554 Anchor Bolt @ 20" L	EA	200	0%	200	0.080	\$ 60.00	\$ 3.90	\$ 4.09	\$ 7.99	\$ 1,598			
19		3/4" Dia A325 Bolt @ 3" L	EA	200	0%	200	0.065	\$ 60.00	\$ 3.90	\$ 1.21	\$ 5.11	\$ 1,022			
			SHEAR LUG:												
20		22"x7.75" Shear Lug (2.5" Thick) 4EA	LBS	478	10%	526	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,156			
			PRE-FABRICATED JOIST:												
21		32 LH Joist @ 60' L (383 EA)	LF	22980	10%	25278	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 285,389			
22		32 LH Joist @ 59' L (112 EA)	LF	6608	10%	7269	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 82,065			
23		32 LH Joist @ 58' L (1 EA)	LF	58	10%	64	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 720			
24		32 LH Joist @ 56' L (1 EA)	LF	56	10%	62	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 695			
25		32 LH Joist @ 55' L (1 EA)	LF	55	10%	61	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 683			
26		32 LH Joist @ 51' L (1 EA)	LF	51	10%	56	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 633			
27		32 LH Joist @ 49' L (1 EA)	LF	49	10%	54	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 609			

DETAILED BREAKDOWN OF ITEMS											
Prepared for: Project ID: Scope: Structural and Misc. Steel										TOTAL TRADE COS	\$3,322,371
										OH & PROFIT	\$332,237
										INSURANCE	\$99,671
										CONTINGENCY	\$166,119
										TAX	\$165,798
										SUGGESTED BID	\$4,086,196
										Date: 07/02/24	

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTIT Y	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOURL	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
28			32 LH Joist @ 48' L (1 EA)	LF	48	10%	53	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 596
29			32 LH Joist @ 43' L (1 EA)	LF	43	10%	47	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 534
30			32 LH Joist @ 41' L (1 EA)	LF	41	10%	45	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 509
31			32 LH Joist @ 35' L (1 EA)	LF	35	10%	39	0.055	\$ 60.00	\$ 3.30	\$ 7.99	\$ 11.29	\$ 435
32			44 LH Joist @ 69' L (135 EA)	LF	9315	10%	10247	0.055	\$ 60.00	\$ 3.30	\$ 8.64	\$ 11.94	\$ 122,343
			METAL JOIST:										
33			W18x40 @ 33' L (1 EA)	LBS	1320	10%	1452	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 3,194
34			W18x40 @ 32' L (1 EA)	LBS	1280	10%	1408	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 3,098
35			W18x40 @ 28' L (1 EA)	LBS	1120	10%	1232	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 2,710
36			W14x22 @ 20' L (1 EA)	LBS	440	10%	484	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,065
37			W12x19 @ 18' L (1 EA)	LBS	342	10%	376	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 828
38			W12x19 @ 17' L (1 EA)	LBS	323	10%	355	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 782
39			W12x19 @ 12' L (1 EA)	LBS	228	10%	251	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 552
40			W16x31 @ 25' L (2 EA)	LBS	1550	10%	1705	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 3,751
41			W21x44 @ 40' L (1 EA)	LBS	1760	10%	1936	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 4,259
			CHANNEL SECTION:										
42			C 10x15.3 @ 11' L (1 EA)	LBS	168	10%	185	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 407
43			C 10x15.3 @ 10' L (1 EA)	LBS	153	10%	168	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 370
44			C 10x15.3 @ 4' L (1 EA)	LBS	61	10%	67	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 148
			BEAM:										
45			52G10N16.7k @ 56' L (2 EA)	LF	112	10%	123	0.050	\$ 60.00	\$ 3.00	\$ 5.46	\$ 8.46	\$ 1,042
46			52G9N17.7k @ 55' L (9 EA)	LF	495	10%	545	0.050	\$ 60.00	\$ 3.00	\$ 5.46	\$ 8.46	\$ 4,606
47			52G9N17.7k @ 54' L (16 EA)	LF	864	10%	950	0.050	\$ 60.00	\$ 3.00	\$ 5.46	\$ 8.46	\$ 8,040
48			52G10N18.4k @ 56' L (2 EA)	LF	112	10%	123	0.050	\$ 60.00	\$ 3.00	\$ 5.46	\$ 8.46	\$ 1,042
49			52G9N19.5k @ 55' L (4 EA)	LF	220	10%	242	0.050	\$ 60.00	\$ 3.00	\$ 5.46	\$ 8.46	\$ 2,047
50			52G9N19.5k @ 54' L (9 EA)	LF	486	10%	535	0.050	\$ 60.00	\$ 3.00	\$ 5.46	\$ 8.46	\$ 4,523
51			52G9N18.9k @ 54' L (1 EA)	LF	54	10%	59	0.050	\$ 60.00	\$ 3.00	\$ 5.46	\$ 8.46	\$ 503
52			52G10N19.5k @ 56' L (1 EA)	LF	56	10%	62	0.050	\$ 60.00	\$ 3.00	\$ 5.46	\$ 8.46	\$ 521
53			48G10N18.1k @ 56' L (1 EA)	LF	56	10%	62	0.044	\$ 60.00	\$ 2.64	\$ 4.99	\$ 7.63	\$ 470
54	S1.02A-S1.02F		48G9N18.1k @ 55' L (2 EA)	LF	110	10%	121	0.044	\$ 60.00	\$ 2.64	\$ 4.99	\$ 7.63	\$ 923

DETAILED BREAKDOWN OF ITEMS											TOTAL TRADE COS		\$3,322,371		
Prepared for: Project ID: Scope: Structural and Misc. Steel											OH & PROFIT		\$332,237		
											INSURANCE		\$99,671		
											CONTINGENCY		\$166,119		
											TAX		\$165,798		
											SUGGESTED BID		\$4,086,196		
													Date:	07/02/24	
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTIT Y	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST		
55			48G9N18.1k @ 54' L (8 EA)	LF	432	10%	475	0.044	\$ 60.00	\$ 2.64	\$ 4.99	\$ 7.63	\$ 3,626		
56			48G9N19.3k @ 55' L (1 EA)	LF	55	10%	61	0.044	\$ 60.00	\$ 2.64	\$ 4.99	\$ 7.63	\$ 462		
57			48G9N19.3k @ 54' L (1 EA)	LF	54	10%	59	0.044	\$ 60.00	\$ 2.64	\$ 4.99	\$ 7.63	\$ 453		
			METAL BEAM:												
58			W21x44 @ 21' L (1 EA)	LBS	924	10%	1016	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 2,236		
59			W16x31 @ 13' L (1 EA)	LBS	403	10%	443	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 975		
60			W27x84 @ 68' L (1 EA)	LBS	5712	10%	6283	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 13,823		
61			W27x84 @ 59' L (2 EA)	LBS	9912	10%	10903	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 23,987		
62			W27x84 @ 58' L (2 EA)	LBS	9744	10%	10718	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 23,580		
			HSS BEAM:												
63			HSS 10x10x1/2" (232 LF)	LBS	14491	10%	15940	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 35,068		
			ANGLE SECTIONS:												
64			L4x4x5/16" (78 LF)	LBS	640	10%	704	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,548		
65			L4x4x3/8" (467 LF)	LBS	4577	10%	5034	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 11,075		
66			L5x5x3/8" (75 LF)	LBS	923	10%	1015	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 2,232		
67			L6x4x3/4" (232 LF)	LBS	5475	10%	6023	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 13,250		
			CHORD ANGLE:												
68			L4x4x5/8" (2016 LF)	LBS	31651	10%	34816	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 76,596		
			CONNECTIONS:												
69			L 6x4x3/8" (3" L) 106 EA	LBS	326	10%	359	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 789		
70			HSS 5x5x3/8" (12" L) 4 EA	LBS	89	10%	98	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 217		
71			6x10x3/4" Plate (8 EA)	LBS	102	10%	112	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 246		
72			8x8x1" Embedded Plate (8 EA)	LBS	145	10%	160	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 351		
73			L 5x5x7/8" (10" L) 270 EA	LBS	6096	10%	6705	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 14,751		
74			20"x16"x9/16" Embedded Plate 270 EA	LBS	15049	10%	16554	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 36,418		
75		L 4x4x5/8" (10" L) 270 EA	LBS	3518	10%	3870	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 8,514			
76		8x8x1" Bearing Plate 270 EA	LBS	4901	10%	5391	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 11,860			
77		16x16x5/8" Stiffener Plate 8 EA	LBS	361	10%	397	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 873			
78		38"x17"x5/8" Stiffener Plate 4 EA	LBS	457	10%	503	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,107			
79		40x27x1" Continuty Plate 4 EA	LBS	459	10%	504	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,110			
80		5x5x3/8" Gusset Plate (61 EA)	LBS	157	10%	173	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 380			
81		10x6x3/4" Plate (100 EA)	LBS	1270	10%	1397	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 3,073			
82		L 6x4x5/16" (12" L) @ 6'0" O.C (110 LF)	LBS	189	10%	208	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 457			
83		L 4x4x3/8" (68" L) @ 6'0" O.C (110 LF)	LBS	1018	10%	1120	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 2,464			
84		1/4" Gusset Plate (4.42 SF) 3 EA	LBS	135	10%	149	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 327			
85		1/4" Gusset Plate (2.85 SF) 6 EA	LBS	174	10%	192	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 422			
		BRACING:													
86		L 7x4x3/8" (17" L) @ 5'0" O.C (307 LF)	LBS	1182	10%	1301	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 2,861			

DETAILED BREAKDOWN OF ITEMS		
Prepared for:	TOTAL TRADE COS	\$3,322,371
Project ID:	OH & PROFIT	\$332,237
Scope: Structural and Misc. Steel	INSURANCE	\$99,671
	CONTINGENCY	\$166,119
	TAX	\$165,798
	SUGGESTED BID	\$4,086,196
Date: 07/02/24		

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTIT Y	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST	
87		S2.11	L 3x3x1/4" (22" L) @ 5'0" O.C (307 LF)	LBS	551	10%	606	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,332	
88			L 3x3x1/4" (6' L) @ 5'0" O.C (307 LF)	LBS	1805	10%	1986	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 4,368	
89			L 3x3x1/4" (75" L) @ 5'0" O.C (307 LF)	LBS	1880	10%	2068	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 4,551	
90			L 2x2x1/4" (48" L) @ 6'0" O.C (2305 LF)	LBS	4902	10%	5392	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 11,863	
			HSS BRACING:											
91	S4.00		HSS 10x10x3/4" (199 LF)	LBS	1463	10%	1609	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 3,540	
			METAL ROOF DECK:											
92	S3.02		1-1/2" Wide Rib Roof Metal Deck (18 GA)	SF	239902	10%	263892	0.035	\$ 60.00	\$ 2.10	\$ 3.17	\$ 5.27	\$ 1,390,712	
	A6.31		STAIR FRAMING											
			STAIR STRINGER											
93			C12 x20.7 Galvanized Steel Stringer @ 14'L (2 EA)	LBs	580	10%	638	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,403	
94			C12 x20.7 Galvanized Steel Stringer @ 13'L (2 EA)	LBs	538	10%	592	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,302	
95			C12 x20.7 Galvanized Steel Stringer @ 12'L (2 EA)	LBs	497	10%	546	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,202	
96			C12 x20.7 Galvanized Steel Stringer @ 11'L (2 EA)	LBs	455	10%	501	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,102	
97			C12 x20.7 Galvanized Steel Stringer @ 16'L (2 EA)	LBs	662	10%	729	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,603	
				STAIR BEAM @ LANDING										
98			C12 x20.7 Galvanized Steel Stringer @ 6'L (6 EA)	LBs	745	10%	820	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,803	
99			C12 x20.7 Galvanized Steel Stringer @ 3'L (6 EA)	LBs	373	10%	410	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 902	
100			C12 x20.7 Galvanized Steel Stringer @ 4'L (9 EA)	LBs	745	10%	820	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,803	
				STAIRS										
101				4'0" x 11" Galvanized "Grip-Strut" Safety Grating Treads (1-1/4" Thick)	EA	49	0%	49	0.860	\$ 60.00	\$ 51.60	\$ 400.00	\$ 451.60	\$ 22,128
102			7.75" Galvanized Steel Plate Risers (14 GA)	EA	51	0%	51	0.820	\$ 60.00	\$ 49.20	\$ 350.00	\$ 399.20	\$ 20,359	
103			(1-1/4" Thick) Galvanized "Grip-Strut" Safety Grating @ Landing	SF	40	10%	44	0.064	\$ 60.00	\$ 3.84	\$ 29.00	\$ 32.84	\$ 1,445	
			STEEL RAILING											
104			2" Galvanized Steel Pipe GuardRail (42" H)	LF	126	10%	139	0.250	\$ 60.00	\$ 15.00	\$ 280.00	\$ 295.00	\$ 41,030	
105			Integrated Metal Rail @ Roof Hatch (42" H)	LF	16	10%	18	0.200	\$ 60.00	\$ 12.00	\$ 80.00	\$ 92.00	\$ 1,649	
			STAIRS @ DOCK (6 EA)											
			STRINGERS											
106			C 12 x 20.7 Galvanized Stringer (8 Ft. Long & 12 EA)	LBs.	1987	10%	2186	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 4,809.02	
			LANDING FRAMING											
107			C 12 x 20.7 (5 Ft. Long & 12 EA)	LBs.	1242	10%	1366	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 3,005.64	
108			C 12 x 20.7 (9 Ft. Long & 12 EA)	LBs.	2236	10%	2459	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 5,410.15	
109			C 12 x 20.7 (6 Ft. Long & 6 EA)	LBs.	745	10%	820	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 1,803.38	
110			1-1/4" Thick Galvanized "Grip-Strut" Safety Grating	SF	305	10%	336	0.064	\$ 60.00	\$ 3.84	\$ 29.00	\$ 32.84	\$ 11,030.10	

DETAILED BREAKDOWN OF ITEMS					
Prepared for: Project ID: Scope: Structural and Misc. Steel		TOTAL TRADE COS	\$3,322,371		
		OH & PROFIT	\$332,237		
		INSURANCE	\$99,671		
		CONTINGENCY	\$166,119		
		TAX	\$165,798		
		SUGGESTED BID	\$4,086,196		
				Date:	07/02/24

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTIT Y	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST	
	A6.30													
			POSTS											
111			2" x 2" x 1/4" Galvanized Steel Tube Post (3'-2" H.) (	LBs.	309	10%	340	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 747.04	
			BASE & CAP PLATES											
112		4/A6.30	8" x 8" x 1/4" Galvanized Base Plate (18 EA)	LBs.	82	10%	91	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 199.45	
113			6" x 6" x 1/4" Galvanized Cap Plate (18 EA)	LBs.	46	10%	50	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 111.08	
				BOLTS										
114			1/2" Dia Expansion Bolt @ Base Plates	EA	72	0%	72	0.065	\$ 60.00	\$ 3.90	\$ 1.21	\$ 5.11	\$ 367.92	
				STAIRS										
				4'-10" Wide Stair As,	EA	6								
115				1-1/4" Thick 11" Galvanized "Grip-Strut" Safety Grati	EA	36	0%	36	0.860	\$ 60.00	\$ 51.60	\$ 400.00	\$ 451.60	\$ 16,257.60
116				7.75" 14 GA. Galvanized Steel Plate Risers	EA	42	0%	42	0.820	\$ 60.00	\$ 49.20	\$ 350.00	\$ 399.20	\$ 16,766.40
			RAILING											
117			3'-6" H. 2" Nominal Galvanized Steel Pipe Guardrail	LF	31	10%	34	0.250	\$ 60.00	\$ 15.00	\$ 280.00	\$ 295.00	\$ 10,059.50	
118		1-1/2" Dia. Nominal Galvanized Steel Pipe Handrail	LF	18	10%	20	0.200	\$ 60.00	\$ 12.00	\$ 80.00	\$ 92.00	\$ 1,821.60		
			UTILITY STAIR											
	A6.31	ASSUMED DETAILS	STRINGERS											
119			C 12 x 20.7 Galvanized Stringer (8 Ft. Long & 2EA)	LBs.	331	10%	364	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 801.50	
				LANDING FRAMING										
120			C 12 x 20.7 (16 Ft. Long & 6 EA)	LBs.	1987	10%	2186	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 4,809.02	
121			C 12 x 20.7 (13 Ft. Long & 23 EA)	LBs.	6189	10%	6808	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 14,978.11	
122			1-1/4" THick Galvanized "Grip-Strut" Safety Grating	SF	534	10%	587	0.064	\$ 60.00	\$ 3.84	\$ 29.00	\$ 32.84	\$ 19,290.22	
				POSTS										
123			2" x 2" x 1/4" Galvanized Steel Tube Post (3'-2" H.) (	LBs.	223	10%	245	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 539.53	
				BASE & CAP PLATES										
124			8" x 8" x 1/4" Galvanized Base Plate (13 EA)	LBs.	60	10%	65	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 144.05	
125			6" x 6" x 1/4" Galvanized Cap Plate (13 EA)	LBs.	33	10%	36	0.020	\$ 60.00	\$ 1.20	\$ 1.00	\$ 2.20	\$ 80.22	
				BOLTS										
126			1/2" Dia Expansion Bolt @ Base Plates	EA	52	0%	52	0.065	\$ 60.00	\$ 3.90	\$ 1.21	\$ 5.11	\$ 265.72	
			STAIRS											
			4'-8" Wide Stair As,	EA	1									
127			1-1/4" Thick 11" Galvanized "Grip-Strut" Safety Grati	EA	6	0%	6	0.860	\$ 60.00	\$ 51.60	\$ 400.00	\$ 451.60	\$ 2,709.60	
128			7.75" 14 GA. Galvanized Steel Plate Risers	EA	7	0%	7	0.820	\$ 60.00	\$ 49.20	\$ 350.00	\$ 399.20	\$ 2,794.40	

DETAILED BREAKDOWN OF ITEMS

Prepared for:
Project ID:
Scope: Structural and Misc. Steel

TOTAL TRADE COS'	\$3,322,371
OH & PROFIT	\$332,237
INSURANCE	\$99,671
CONTINGENCY	\$166,119
TAX	\$165,798
SUGGESTED BID	\$4,086,196

Date: 07/02/24

[illegible]

SUBTOTAL \$ 3,116,731	
-----------------------	--

SITE IMPROVEMENTS

[illegible]

SUBTOTAL \$		44,140
--------------------	--	---------------

	PROJECTED COST		\$3,322,371
OVERHEAD AND PROFIT		10%	\$332,237
INSURANCE		3%	\$99,671
CONTINGENCY		5%	\$166,119
TAX		9%	\$165,798
SUGGESTED BID			\$4,086,196

Total Weight Steel	LBS	402507
Total Steel Pcs	EA	2774
Total Metal Deck	SF	239902