

GENERAL SUMMARY

Prepared for:

Project ID:

Scope: GC

Date:

BUILDING GSF 3,184


FIRST FLOOR/ BASEMENT 1,156

2ND FLOOR/ MAIN FLOOR 1,658

3RD FLOOR/ CARPORT 370

DIVISION NO.	DESCRIPTION	TOTAL DIV. COST	TOTAL DIV. COST (PER SF)
1000	General Requirments	\$ 25,200	\$ 7.91
2000	Existing Conditions	\$ 17,880	\$ 5.62
3000	Concrete	\$ 2,941	\$ 0.92
5000	Metals	\$ 8,458	\$ 2.66
6000	Wood & Plastics	\$ 16,150	\$ 5.07
7000	Thermal & Moisture Protection	\$ 2,335	\$ 0.73
8000	Openings	\$ 13,603	\$ 4.27
9000	Finishes	\$ 84,499	\$ 26.54
10000	Specialties	\$ 5,173	\$ 1.62
11000	Equipment	\$ 8,108	\$ 2.55
12000	Furnishing	\$ 32,655	\$ 10.26
22000	Plumbing	\$ 17,266	\$ 5.42
23000	HVAC	\$ 8,840	\$ 2.78
26000	Electrical	\$ 18,952	\$ 5.95
TOTAL TRADE COST		\$ 262,059	\$ 82
OVERHEAD AND PROFIT	15%	\$ 39,309	\$ 12.35
INSURANCE	3%	\$ 7,862	\$ 2
CONTINGENCY	5%	\$ 13,103	\$ 4
TAX	9%	\$ 11,386	\$ 7
TOTAL TRADE COST		\$ 333,718	\$ 108

DIVISION COST COMPARISON

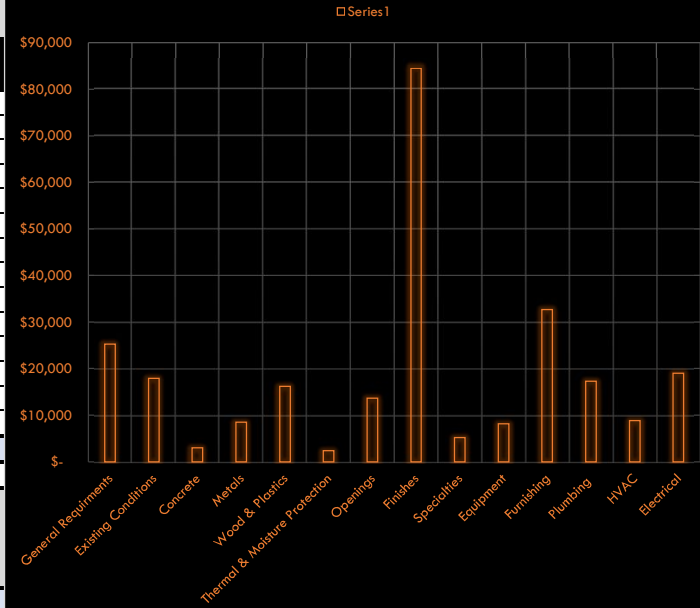

DETAILED BREAKDOWN OF ITEMS											TOTAL TRADE COST		\$262,059	
Prepared for: Project ID: Scope: GC REMODELING											OH & PROFIT		\$39,309	
											INSURANCE		\$7,862	
											CONTINGENCY		\$13,103	
											TAX		\$11,386	
											SUGGESTED BID		\$333,718	
											Date:		11/27/23	
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTIT Y	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST	
GENERAL REQUIREMENTS														
1			Permits	LS	1	0%	1	0.000	\$ -	\$ -	\$ -	\$ 1,800.00	\$ 1,800.00	
2			Supervision and Coordination	LS	1	0%	1	0.000	\$ -	\$ -	\$ -	\$ 7,200.00	\$ 7,200.00	
3			Submittals and Shop drawings	LS	1	0%	1	0.000	\$ -	\$ -	\$ -	\$ 1,200.00	\$ 1,200.00	
4			Final Cleaning	LS	1	0%	1	0.000	\$ -	\$ -	\$ -	\$ 1,500.00	\$ 1,500.00	
5			Mobilization Costs	LS	1	0%	1	0.000	\$ -	\$ -	\$ -	\$ 6,500.00	\$ 6,500.00	
6			Temporary Control & Facilities	LS	1	0%	1	0.000	\$ -	\$ -	\$ -	\$ 3,200.00	\$ 3,200.00	
7			Scaffolding	LS	1	0%	1	0.000	\$ -	\$ -	\$ -	\$ 800.00	\$ 800	
8			Dump/ Haul Off Demo Material	LS	1	0%	1	0.000	\$ -	\$ -	\$ -	\$ 3,000.00	\$ 3,000	
												SUBTOTAL		\$ 25,200
EXISTING CONDITIONS														
DEMOLITION														
9			Remove Wall (5'H)	SF	16	0%	16	0.040	\$ 85.00	\$ 3.40		\$ 3.40	\$ 56	
10			Remove Stair 1st Floor-2nd Floor (11 Treads)	EA	1	0%	1	3.850	\$ 85.00	\$ 327.25		\$ 327.25	\$ 327	
11			Remove Floor With Framing	SF	73	0%	73	0.082	\$ 85.00	\$ 6.97		\$ 6.97	\$ 507	
12			Remove Wall (9'H)	SF	1202	0%	1202	0.040	\$ 85.00	\$ 3.40		\$ 3.40	\$ 4,086	
13			Remove Stair 2nd Floor-3rd Floor (10 Treads)	EA	1	0%	1	3.790	\$ 85.00	\$ 322.15		\$ 322.15	\$ 322	
14			Remove Fireplace	EA	1	0%	1	2.880	\$ 85.00	\$ 244.80		\$ 244.80	\$ 245	
15			Remove Window (4'-5"x 7')	EA	1	0%	1	1.400	\$ 85.00	\$ 119.00		\$ 119.00	\$ 119	
16			Remove Door (3x7)	EA	3	0%	3	1.280	\$ 85.00	\$ 108.80		\$ 108.80	\$ 326	
17			Remove Window (9'-4'-8")	EA	1	0%	1	1.710	\$ 85.00	\$ 145.35		\$ 145.35	\$ 145	
18			Remove Window (4'8"x 4'-8")	EA	1	0%	1	1.200	\$ 85.00	\$ 102.00		\$ 102.00	\$ 102	
19			Remove & Salvage Window (3'-0"x 4'-0")	EA	1	0%	1	0.990	\$ 85.00	\$ 84.15		\$ 84.15	\$ 84	
20			New Wall Opening for Window (2'-8" 2'-8")	EA	1	0%	1	1.500	\$ 85.00	\$ 127.50		\$ 127.50	\$ 128	
21			Remove Countertop	SF	48	0%	48	0.060	\$ 85.00	\$ 5.10		\$ 5.10	\$ 247	
22			Remove Cabinetry	LF	24	0%	24	0.250	\$ 85.00	\$ 21.25		\$ 21.25	\$ 520	
23			Remove Kitchen Fixtures	EA	2	0%	2	1.400	\$ 85.00	\$ 119.00		\$ 119.00	\$ 238	
24			Infill Wall Opening	SF	86	0%	86	0.040	\$ 85.00	\$ 3.40	\$ 7.88	\$ 11.28	\$ 967	
25			Remove Existing Flooring @ Family Room First Floor	SF	261	0%	261	0.020	\$ 85.00	\$ 1.70		\$ 1.70	\$ 444	
26			Remove Existing Ceiling @ Family Room First Floor	SF	261	0%	261	0.035	\$ 85.00	\$ 2.98		\$ 2.98	\$ 777	
27			Remove Existing Flooring @ Second Floor	SF	1422	0%	1422	0.020	\$ 85.00	\$ 1.70		\$ 1.70	\$ 2,418	
28			Remove Existing Ceiling @ Second Floor	SF	1429	0%	1429	0.035	\$ 85.00	\$ 2.98		\$ 2.98	\$ 4,251	
29			Remove Existing Flooring @ Third Floor	SF	336	0%	336	0.020	\$ 85.00	\$ 1.70		\$ 1.70	\$ 571	
30			Remove Existing Ceiling @ Third Floor	SF	336	0%	336	0.035	\$ 85.00	\$ 2.98		\$ 2.98	\$ 1,000	
												SUBTOTAL		\$ 17,880
CONCRETE														
CAST IN-SITU CONCRETE														
CONTINUOUS CONCRETE FOOTING														
Concrete Footing (36"x36"x 26")														
31			Concrete	CY	1	10%	1	3.800	\$ 90.00	\$ 342.00	\$ 228.69	\$ 570.69	\$ 460	
32			#4 Reinforcement	Lbs	54	10%	59	0.015	\$ 85.00	\$ 1.28	\$ 0.98	\$ 2.26	\$ 134	
33			Form Work	SF	26	10%	29	0.090	\$ 85.00	\$ 7.65		\$ 7.65	\$ 222	
34			Excavation	CY	3	10%	3	1.100	\$ 85.00	\$ 93.50		\$ 93.50	\$ 309	
35			Backfill	CY	2	10%	2	0.785	\$ 85.00	\$ 66.73		\$ 66.73	\$ 147	

DETAILED BREAKDOWN OF ITEMS

Prepared for:	
Project ID:	
Scope:	GC REMODELING

TOTAL TRADE COST	\$262,059
OH & PROFIT	\$39,309
INSURANCE	\$7,862
CONTINGENCY	\$13,103
TAX	\$11,386
SUGGESTED BID	\$333,718

Date: 11/27/23

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTITY	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
			Concrete Footing (20"x20"x 18")	EA	2								
36			Concrete	CY	1	10%	1	3.800	\$ 90.00	\$ 342.00	\$ 228.69	\$ 570.69	\$ 377
37			#4 Reinforcement	Lbs	108	10%	119	0.015	\$ 85.00	\$ 1.28	\$ 0.98	\$ 2.26	\$ 268
38			Form Work	SF	53	10%	58	0.090	\$ 85.00	\$ 7.65		\$ 7.65	\$ 444
39			Excavation	CY	4	10%	4	1.100	\$ 85.00	\$ 93.50		\$ 93.50	\$ 360
40			Backfill	CY	3	10%	3	0.785	\$ 85.00	\$ 66.73		\$ 66.73	\$ 220

SUBTOTAL	\$ 2,941
-----------------	-----------------

METALS

[illegible]

SUBTOTAL	\$ 8,458
-----------------	-----------------

WOOD & PLASTIC

[illegible]

SUBTOTAL	\$ 16,150
-----------------	------------------

DETAILED BREAKDOWN OF ITEMS											TOTAL TRADE COST		\$262,059			
Prepared for: Project ID: Scope: GC REMODELING											OH & PROFIT		\$39,309			
											INSURANCE		\$7,862			
											CONTINGENCY		\$13,103			
											TAX		\$11,386			
											SUGGESTED BID		\$333,718			
													Date:		11/27/23	
SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTIT Y	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST			
THERMAL & MOISTURE PROTECTION																
			THERMAL INSULATION													
			INSULATION:													
56			Closed Cell Spray Foam Insulation (R-30)	SF	91	10%	100	0.020	\$ 85.00	\$ 1.70	\$ 3.47	\$ 5.17	\$ 518			
57			R-19 Batt Insulation (3' Wide @ Stairs)	SF	24	10%	26	0.012	\$ 85.00	\$ 1.02	\$ 1.86	\$ 2.88	\$ 76			
			WATERPROOFING													
58			Sealant & Backer Rod @ New Window and Doors	LF	322	10%	354	0.010	\$ 85.00	\$ 0.85	\$ 0.95	\$ 1.80	\$ 638			
59			Metal Flashing @ Top of Opening	LF	27	10%	30	0.030	\$ 85.00	\$ 2.55	\$ 3.25	\$ 5.80	\$ 172			
60			Vapor Barrier @ Washroom Tiles	SF	756	10%	832	0.008	\$ 85.00	\$ 0.68	\$ 0.44	\$ 1.12	\$ 931			
			ROOFING & ACCESSORIES													
			ROOFING:													
			Roofing is Existing													
SUBTOTAL \$												2,335				
OPENINGS																
			DOORS													
61			Tempered Glass Entry Door (4' x 8')	EA	1	0%	1	3.120	\$ 90.00	\$ 280.80	\$ 1,544.00	\$ 1,824.80	\$ 1,825			
62			(2) Closet Door (1'6" x 6'8")	EA	1	0%	1	2.700	\$ 90.00	\$ 243.00	\$ 877.00	\$ 1,120.00	\$ 1,120			
63			New Door Solid Wood Core(3'-0"x 6'-8")	EA	1	0%	1	2.950	\$ 90.00	\$ 265.50	\$ 1,100.00	\$ 1,365.50	\$ 1,366			
			CRAWL SPACE													
64			New Crawl Space Access (24"x30")	EA	1	0%	1	1.280	\$ 90.00	\$ 115.20	\$ 299.95	\$ 415.15	\$ 415			
			HARDWARES													
65			Hardware By Manufacturer	EA	3	0%	3	2.500	\$ 90.00	\$ 225.00	\$ 550.00	\$ 775.00	\$ 2,325			
			WINDOWS													
66			New Window with Tempered Glass (5'-10" x 8'-10")	EA	1	0%	1	2.460	\$ 90.00	\$ 221.40	\$ 1,824.90	\$ 2,046.30	\$ 2,046			
67			New Window with Tempered Glass (5'-10" x 4'-0")	EA	1	0%	1	2.170	\$ 90.00	\$ 195.30	\$ 1,155.00	\$ 1,350.30	\$ 1,350			
68			Install Existing Window (3'-0"x 4'-0")	EA	1	0%	1	1.990	\$ 90.00	\$ 179.10		\$ 179.10	\$ 179			
69			Tempered Glass Sidelite (18" x 80")	EA	1	0%	1	1.400	\$ 90.00	\$ 126.00	\$ 512.00	\$ 638.00	\$ 638			
			TRIMS													
70			Door & Window Trims	LF	322	10%	354	0.032	\$ 90.00	\$ 2.88	\$ 2.88	\$ 5.76	\$ 2,039			
71			Window Sill	LF	18	10%	19	0.060	\$ 90.00	\$ 5.40	\$ 10.12	\$ 15.52	\$ 299			
SUBTOTAL \$												13,603				
FINISHES																
			DRY WALL ASSEMBLIES													
			GROUND FLOOR													
			2x4 Wood Wall @16" O.C (8' H)	LF	12											
72			5/8" Type X Gypsum Board On both Side of Wall	SF	184	10%	202	0.012	\$ 85.00	\$ 1.02	\$ 0.70	\$ 1.72	\$ 349			

DETAILED BREAKDOWN OF ITEMS			
Prepared for:		TOTAL TRADE COST	\$262,059
Project ID:		OH & PROFIT	\$39,309
Scope:	GC REMODELING	INSURANCE	\$7,862
		CONTINGENCY	\$13,103
		TAX	\$11,386
		SUGGESTED BID	\$333,718
		Date:	11/27/23

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTIT Y	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOURL	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
73			2x4 Wood Studs @ 16" O.C	LF	69	10%	76	0.020	\$ 85.00	\$ 1.70	\$ 1.27	\$ 2.97	\$ 225
74			2x4 Bottom Plate	LF	12	10%	13	0.020	\$ 85.00	\$ 1.70	\$ 1.27	\$ 2.97	\$ 38
75			2x4 Top & Midspan	LF	35	10%	38	0.020	\$ 85.00	\$ 1.70	\$ 1.27	\$ 2.97	\$ 113
76			R-13 Batt Insulation	SF	92	10%	101	0.010	\$ 85.00	\$ 0.85	\$ 1.18	\$ 2.03	\$ 205
77			Sealant	LF	23	10%	25	0.010	\$ 85.00	\$ 0.85	\$ 0.40	\$ 1.25	\$ 32
78			Screws	EA	288	0%	288	0.001	\$ 85.00	\$ 0.04	\$ 0.05	\$ 0.09	\$ 27
79			Tape	LF	96	10%	106	0.012	\$ 85.00	\$ 1.02	\$ 0.72	\$ 1.74	\$ 184
80			Mudding	LBS	10	10%	11	0.258	\$ 85.00	\$ 21.93	\$ 1.55	\$ 23.48	\$ 252
			2x4 Wood Wall @16" O.C (9' H)	LF	53								
81			5/8" Type X Gypsum Board On both Side of Wall	SF	949	10%	1043	0.012	\$ 85.00	\$ 1.02	\$ 0.70	\$ 1.72	\$ 1,798
82			2x4 Wood Studs @ 16" O.C	LF	356	10%	391	0.020	\$ 85.00	\$ 1.70	\$ 1.27	\$ 2.97	\$ 1,162
83			2x4 Bottom Plate	LF	53	10%	58	0.020	\$ 85.00	\$ 1.70	\$ 1.27	\$ 2.97	\$ 172
84			2x4 Top & Midspan	LF	158	10%	174	0.020	\$ 85.00	\$ 1.70	\$ 1.27	\$ 2.97	\$ 517
85			R-13 Batt Insulation	SF	474	10%	522	0.010	\$ 85.00	\$ 0.85	\$ 1.18	\$ 2.03	\$ 1,059
86			Sealant	LF	105	10%	116	0.010	\$ 85.00	\$ 0.85	\$ 0.40	\$ 1.25	\$ 145
87			Screws	EA	1440	0%	1440	0.001	\$ 85.00	\$ 0.04	\$ 0.05	\$ 0.09	\$ 133
88			Tape	LF	480	10%	528	0.012	\$ 85.00	\$ 1.02	\$ 0.72	\$ 1.74	\$ 919
89			Mudding	LBS	50	10%	55	0.258	\$ 85.00	\$ 21.93	\$ 1.55	\$ 23.48	\$ 1,299
			2x6 Wood Wall @ 16" O.C (9' H)	LF	5								
90			5/8" Type X Gypsum Board On both Side of Wall	SF	85	10%	93	0.012	\$ 85.00	\$ 1.02	\$ 0.70	\$ 1.72	\$ 161
91			2x6 Wood Studs @ 16" O.C	LF	32	10%	35	0.022	\$ 85.00	\$ 1.87	\$ 2.10	\$ 3.97	\$ 139
92			2x6 Bottom Plate	LF	5	10%	5	0.022	\$ 85.00	\$ 1.87	\$ 2.10	\$ 3.97	\$ 21
93			2x6 Top & Midspan	LF	14	10%	16	0.022	\$ 85.00	\$ 1.87	\$ 2.10	\$ 3.97	\$ 62
94			R-19 Batt Insulation	SF	42	10%	47	0.012	\$ 85.00	\$ 1.02	\$ 1.86	\$ 2.88	\$ 134
95			Sealant	LF	9	10%	10	0.010	\$ 85.00	\$ 0.85	\$ 0.40	\$ 1.25	\$ 13
96			Screws	EA	144	0%	144	0.001	\$ 85.00	\$ 0.04	\$ 0.05	\$ 0.09	\$ 13
97			Tape	LF	48	10%	53	0.012	\$ 85.00	\$ 1.02	\$ 0.72	\$ 1.74	\$ 92
98			Mudding	LBS	4	10%	5	0.258	\$ 85.00	\$ 21.93	\$ 1.55	\$ 23.48	\$ 116
			2x6 Wood Wall @ 16" O.C (3' H)	LF	6								
99			5/8" Type X Gypsum Board On both Side of Wall	SF	37	10%	41	0.012	\$ 85.00	\$ 1.02	\$ 0.70	\$ 1.72	\$ 71
100			2x6 Wood Studs @ 16" O.C	LF	14	10%	15	0.022	\$ 85.00	\$ 1.87	\$ 2.10	\$ 3.97	\$ 61
101			2x6 Bottom Plate	LF	6	10%	7	0.022	\$ 85.00	\$ 1.87	\$ 2.10	\$ 3.97	\$ 27
102			2x6 Top & Midspan	LF	19	10%	20	0.022	\$ 85.00	\$ 1.87	\$ 2.10	\$ 3.97	\$ 81
103			R-19 Batt Insulation	SF	19	10%	20	0.012	\$ 85.00	\$ 1.02	\$ 1.86	\$ 2.88	\$ 59
104			Sealant	LF	12	10%	14	0.010	\$ 85.00	\$ 0.85	\$ 0.40	\$ 1.25	\$ 17
105			Screws	EA	96	0%	96	0.001	\$ 85.00	\$ 0.04	\$ 0.05	\$ 0.09	\$ 9
106			Tape	LF	32	10%	35	0.012	\$ 85.00	\$ 1.02	\$ 0.72	\$ 1.74	\$ 61
107			Mudding	LBS	2	10%	2	0.258	\$ 85.00	\$ 21.93	\$ 1.55	\$ 23.48	\$ 51
			2x8 Shear Wall (9'H)	LF	76								
108			1/2" Plywood on Both Sides	SF	1368	10%	1505	0.016	\$ 85.00	\$ 1.36	\$ 1.09	\$ 2.45	\$ 3,692
109			2x8 Wood Studs @ 16" O.C	LF	513	10%	564	0.025	\$ 85.00	\$ 2.13	\$ 3.02	\$ 5.15	\$ 2,904
110			2x8 Bottom Plate	LF	76	10%	84	0.025	\$ 85.00	\$ 2.13	\$ 3.02	\$ 5.15	\$ 430
111			2x8 Top & Midspan	LF	228	10%	251	0.025	\$ 85.00	\$ 2.13	\$ 3.02	\$ 5.15	\$ 1,290
112			R-19 Batt Insulation	SF	228	10%	251	0.012	\$ 85.00	\$ 1.02	\$ 1.86	\$ 2.88	\$ 722

DETAILED BREAKDOWN OF ITEMS

Prepared for:	
Project ID:	
Scope:	GC REMODELING

TOTAL TRADE COST	\$262,059
OH & PROFIT	\$39,309
INSURANCE	\$7,862
CONTINGENCY	\$13,103
TAX	\$11,386
SUGGESTED BID	\$333,718

Date: 11/27/23

SR #	Drawing #	Detail #	DESCRIPTION	UNIT	QUANTIT Y	WASTAGE	QUANTITY W/ WASTAGE	UNIT MANHOUR	HOURLY WAGE	LABOR COST	MAT. COST	UNIT COST	SUB COST
			FINISHES										
			No details Available for New Finsihes on Plans. New Finsihes have been taken and assumed only in Rooms where New Walls are constructed										
			FLOORING										
113			New Vinyl Flooring (Assumed For Family Room)	SF	234	10%	257	0.055	\$ 88.00	\$ 4.84	\$ 4.55	\$ 9.39	\$ 2,417
114			New Vinyl Flooring @ Second Floor (Assumed)	SF	1375	10%	1512	0.055	\$ 88.00	\$ 4.84	\$ 4.55	\$ 9.39	\$ 14,201
115			New Floor Tiles @ Toilet @ Second Floor	SF	110	10%	121	0.060	\$ 88.00	\$ 5.28	\$ 5.50	\$ 10.78	\$ 1,301
116			New Wall Tiles @ Toilet @ Second Floor	SF	756	10%	832	0.060	\$ 88.00	\$ 5.28	\$ 5.60	\$ 10.88	\$ 9,049
117			New Sealed Concrete Flooring Assumed @ Carport	SF	369	10%	406	0.040	\$ 88.00	\$ 3.52	\$ 1.58	\$ 5.10	\$ 2,070
118			4" High Wall Base	LF	490	10%	539	0.025	\$ 88.00	\$ 2.20	\$ 1.32	\$ 3.52	\$ 1,897
			CEILING										
			GROUND FLOOR										
119			New Gypsum Board Ceiling- Painted (Assumed For Family Room)	SF	284	10%	313	0.012	\$ 85.00	\$ 1.02	\$ 0.70	\$ 1.72	\$ 539
120			New Gypsum Board Ceiling @ Second Floor (Assumed)	SF	1467	10%	1614	0.012	\$ 85.00	\$ 1.02	\$ 0.70	\$ 1.72	\$ 2,781
121			New Gypsum Board Ceiling @ 3rd Floor	SF	369	10%	406	0.012	\$ 85.00	\$ 1.02	\$ 0.70	\$ 1.72	\$ 700
			PAINT										
			GROUND FLOOR										
			Wall Paint:										
122			Paint @ Wall	SF	4294	10%	4723	0.025	\$ 88.00	\$ 2.20	\$ 0.98	\$ 3.18	\$ 15,019
			Ceiling Paint:										
123			Gypsum Ceiling Paint	SF	2120	10%	2332	0.028	\$ 88.00	\$ 2.46	\$ 0.98	\$ 3.44	\$ 8,031
124			FRP Panels @ Kitchen	SF	498	10%	547	0.040	\$ 88.00	\$ 3.52	\$ 3.89	\$ 7.41	\$ 4,056
125			Painted Wood Siding @ New Carport Wall	SF	300	10%	330	0.050	\$ 88.00	\$ 4.40	\$ 6.47	\$ 10.87	\$ 3,585
												SUBTOTAL \$	84,499
SPECIALTIES													
			BATH ACCESSORIES										
126			Soap Dispenser	EA	3	0%	3	0.512	\$ 85.00	\$ 43.55	\$ 58.00	\$ 101.55	\$ 305
127			Toilet Paper Dispenser	EA	3	0%	3	0.561	\$ 85.00	\$ 47.70	\$ 74.00	\$ 121.70	\$ 365
128			Towel Bar	EA	3	0%	3	0.464	\$ 85.00	\$ 39.41	\$ 50.00	\$ 89.41	\$ 268
129			42" Grab Bar	EA	4	0%	4	0.464	\$ 85.00	\$ 39.41	\$ 41.00	\$ 80.41	\$ 322
130			24" Grab Bar	EA	4	0%	4	0.464	\$ 85.00	\$ 39.41	\$ 38.55	\$ 77.96	\$ 312
131			18" Grab Bar	EA	4	0%	4	0.464	\$ 85.00	\$ 39.41	\$ 36.00	\$ 75.41	\$ 302
132			Wall Mirror	EA	3	0%	3	1.525	\$ 85.00	\$ 129.63	\$ 155.00	\$ 284.63	\$ 854
133			Trash Bin	EA	3	0%	3	0.183	\$ 85.00	\$ 15.56	\$ 50.99	\$ 66.55	\$ 200
134			Shower Pan	EA	1	0%	1	1.000	\$ 85.00	\$ 85.03	\$ 289.00	\$ 374.03	\$ 374
135			Shower Cabin Glass	EA	1	0%	1	5.563	\$ 85.00	\$ 472.87	\$ 1,399.90	\$ 1,872.77	\$ 1,873
												SUBTOTAL \$	5,173

DETAILED BREAKDOWN OF ITEMS

Prepared for:	
Project ID:	
Scope:	GC REMODELING

TOTAL TRADE COST	\$262,059
OH & PROFIT	\$39,309
INSURANCE	\$7,862
CONTINGENCY	\$13,103
TAX	\$11,386
SUGGESTED BID	\$333,718

Date: 11/27/23

[illegible]

DETAILED BREAKDOWN OF ITEMS			
Prepared for:		TOTAL TRADE COST	\$262,059
Project ID:		OH & PROFIT	\$39,309
Scope:	GC REMODELING	INSURANCE	\$7,862
		CONTINGENCY	\$13,103
		TAX	\$11,386
		SUGGESTED BID	\$333,718

Date: 11/27/23

[illegible]

Note : New Plumbing Work Assumed on Second Floor Only

Note : No Details Availbles for Sprinklers

SUBTOTAL \$		17,266
-------------	--	--------

HVAC	
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

[illegible][illegible][illegible]

SUBTOTAL \$		8,840
-------------	--	-------

ELECTRICAL

[illegible]

159			Relocate Existing Panel	EA	1	0%	1	3.900	\$ 95.00	\$ 370.50		\$ 370.50	\$ 370.50
160			Dimmer Switch W/ Motion Sensor	EA	16	0%	16	0.260	\$ 95.00	\$ 24.70	\$ 32.00	\$ 56.70	\$ 907.20
161			GFCI Duplex Recepticles	EA	22	0%	22	0.320	\$ 95.00	\$ 30.40	\$ 38.66	\$ 69.06	\$ 1,519.32
162			Wall Sconce Light	EA	2	0%	2	0.950	\$ 95.00	\$ 90.25	\$ 146.00	\$ 236.25	\$ 472.50
163			Recessed Can Light	EA	19	0%	19	1.100	\$ 95.00	\$ 104.50	\$ 165.00	\$ 269.50	\$ 5,120.50
164			Hanging Pendant Light	EA	2	0%	2	1.150	\$ 95.00	\$ 109.25	\$ 212.00	\$ 321.25	\$ 642.50
165			Linear Fluorescent Light	EA	1	0%	1	1.500	\$ 95.00	\$ 142.50	\$ 180.00	\$ 322.50	\$ 322.50
166			Recessed Under Cabinetry Light	EA	2	0%	2	0.680	\$ 95.00	\$ 64.60	\$ 46.21	\$ 110.81	\$ 221.62
167			Allowance For Wiring & Ducts (1500 SF)	LS	1	0%	1			\$ 3,750.00	\$ 5,625.00	\$ 9,375.00	\$ 9,375.00

167			Allowance For Wiring & Ducts (1500 SF)	LS	1	0%	1			\$ 3,750.00	\$ 5,625.00	\$ 9,375.00	\$ 9,375.00
-----	--	--	---	----	---	----	---	--	--	-------------	-------------	-------------	-------------

SUBTOTAL \$		18,952
-------------	--	--------

	PROJECTED COST	\$262,059
--	-----------------------	-----------

OVERHEAD AND PROFIT	15%	\$39,309
INSURANCE	3%	\$7,862
CONTINGENCY	5%	\$13,103
TAX	9%	\$11,386

	SUGGESTED BID	\$333,718
--	---------------	-----------